


**LUFKIN  
OIL FIELD  
EQUIPMENT**



**CATALOG 41**

*Featuring the*

**LUFKIN** *Universal*

**PUMPING UNIT**



# LUFKIN FOUNDRY & MACHINE CO.

FACTORY AND GENERAL OFFICES

LUFKIN, TEXAS

BRANCH OFFICES AND WAREHOUSES

GULF COAST DIVISION  
Houston, Texas.  
706 2nd Nat'l Bank Bldg.  
Phone Preston 8610  
WAREHOUSE  
Alice, Texas.  
Phone 395  
EXPORT DIVISION  
New York, N. Y.  
149 Broadway,  
Cable address "LUFFO"  
Phone Barclay 70562

CALIFORNIA DIVISION  
Los Angeles, California,  
5959 South Alameda  
Phone Lafayette 1201  
Bakersfield Warehouse,  
30th and M Streets,  
Bakersfield, California

EAST TEXAS DIVISION  
Kilgore, Texas,  
Phone 875  
P. O. Box 871

MID-CONTINENT DIVISION  
Tulsa, Oklahoma,  
719 Thompson Bldg.  
Phone 30204

WAREHOUSE  
Seminole, Oklahoma,  
Phone 8435

KANSAS DIVISION  
Great Bend, Kansas,  
Phone 1044

DALLAS OFFICE  
1317 Magnolia Bldg.  
Phone 2-5834

WAREHOUSE  
Odessa, Texas,  
Phone 216

ILLINOIS  
Salem  
Box 306  
Phone 5571

## INDEX LUFKIN OIL FIELD EQUIPMENT

Catalogue No. 41


Trout Counterbalance Crank.....	1550
Lufkin Gear Reducers.....	1551
Universal Centerline Units, Description and Advantages.....	1552-1553
Dimensions, TC-0A, 1A, 2A and 3A Assemblies.....	1554
Specifications, TC-0A, 1A, 2A and 3A Assemblies.....	1555
Alternative Settings, TC-0A, 1A, 2A and 3A Assemblies.....	1556
Alternative Installation Photographs.....	1557
Specifications, TC-2, 3, 44 and 5-C Assemblies.....	1558
Dimensions, TC-2, 3, and 44 Assemblies.....	1559
Specifications and Assembly Drawing, TC-5-C.....	1560
Specifications, TC-66-5A and 77-3 Units.....	1561
Long Stroke Units.....	1562-1563
Single Crank Units, Specifications and Photographs.....	1564-1565
Dimensions, Single Crank Assemblies.....	1566
Samson Post Assemblies for Single Crank Units.....	1566
Walking Beam Capacities.....	1566
Back Crank Equipment.....	1567
Center Bearings.....	1568
Universal Pitman.....	1568
Universal Belt Tightener.....	1569
Engine Slide Rails.....	1569
Pumping Jacks, Description and Specifications.....	1570-1571
Horizontal Swing.....	1572
Stroke Post.....	1572
Knock-Out Post.....	1572
Volume Tank.....	1572
Pumping Powers.....	1573
LUFKALOY Specification Metal.....	1574-1575
Lufkin Trailers.....	1576-1577
Manufacturing Processes and Equipment.....	1578-1579-1580

**INTRODUCTION**

Eighteen years ago LUFKIN manufactured and installed the first geared pumping unit ever to pump a deep well. Today thousands of LUFKIN units are operating successfully in oil fields all over the world. LUFKIN has pioneered a large majority of the steady improvements in pumping equipment during this time. LUFKIN introduced the first rotary counterbalanced crank and furnished the first unit with a brake, also was the first to develop an oil bath, dust-proof pitman bearing, head and tail bearing, and center iron bearing. LUFKIN introduced the first one hundred per cent center line bearing walking beam and equalizer, and, because of patents, are the only concern able to furnish them today.

Being located close to many producing areas has enabled our engineers to keep in close touch with the performance of our equipment. It has been possible to continually watch details, which many times result in success or failure in practical operation.


Our plant is completely equipped with the finest machine tools obtainable anywhere. We invite you to visit our plant and see for yourself why LUFKIN is still leading after all these years.

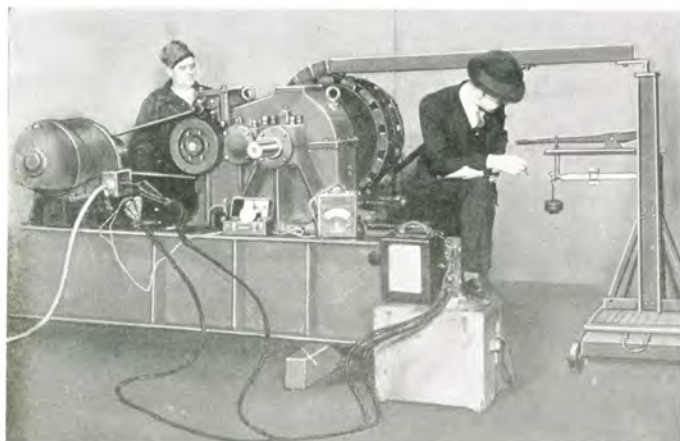

*Testing Lufkin Units.*

**EVERY LUFKIN GEAR IS RUN UNDER PRONY BRAKE LOAD**

**THE TROUT CRANK**

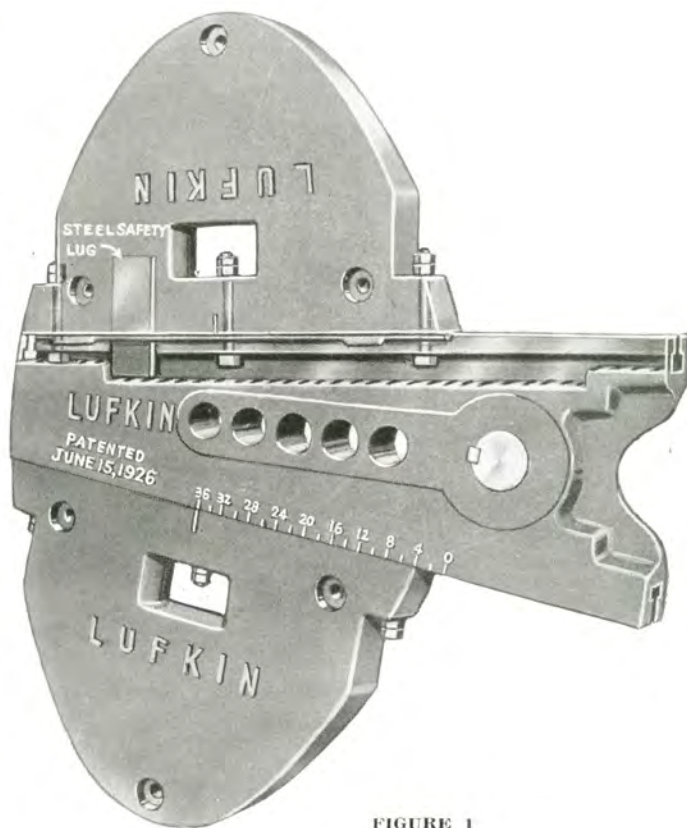

**FIGURE 1**

The Trout crank is widely recognized as the finest counterbalance for pumping oil wells. The outstanding features are as follows:

1. It is simple and easy to adjust to any point between zero and maximum counterbalance.
2. Lead or lag is readily obtainable.
3. Safety. It is impossible for weights to slide off on account of steel lug cast in the weights.
4. The short radius of gyration reduces bearing pressure at the crank shaft.
5. It is not necessary to send a truck to the tool house or supply store for additional counterweights every time a well load increases.
6. One man can balance the well with a LUFKIN unit and a Trout crank.

**LUFKIN FOUNDRY & MACHINE CO.**

**LUFKIN, TEXAS**

**SINGLE REDUCTION GEAR UNITS**

Single reduction gear units are preferred where slow speed engines (up to 750 R.P.M.) are used. They are built in six sizes.

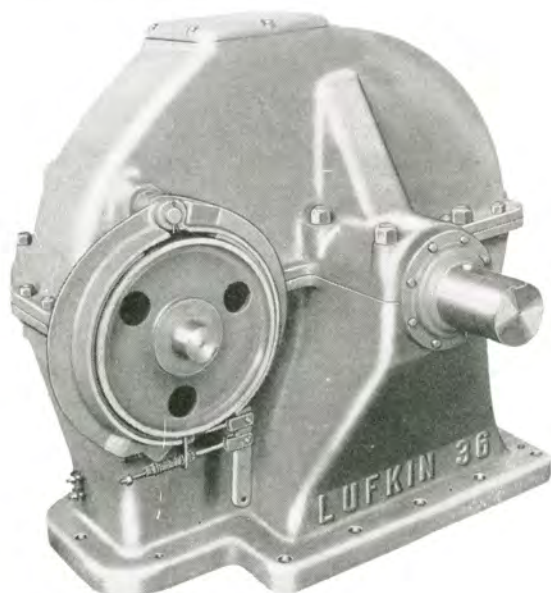


FIGURE 2

**DOUBLE REDUCTION GEAR UNITS**

Double reduction gear units are used with electric motors and multi-cylinder gas engines. They are made in nine sizes.

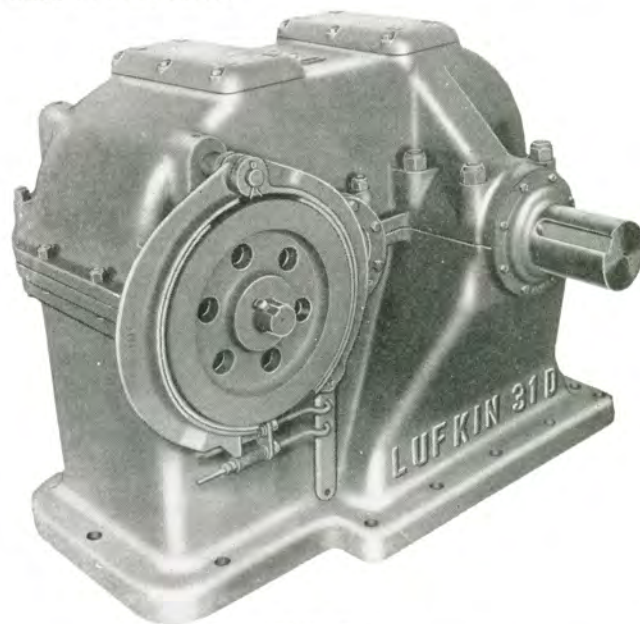


FIGURE 4

LUFKIN ENGINEERS HAVE A RICH BACKGROUND of practical experience in unit operation, and behind their designs is a plant using modern production methods and up-to-date tools where absolute duplicate precision work is maintained.

Our entire product is made in jigs or by template, even to posts and walking beams, to secure correct alignment and absolute duplication of parts.



FIGURE 3

*Single Reduction Gear Unit, cover removed*


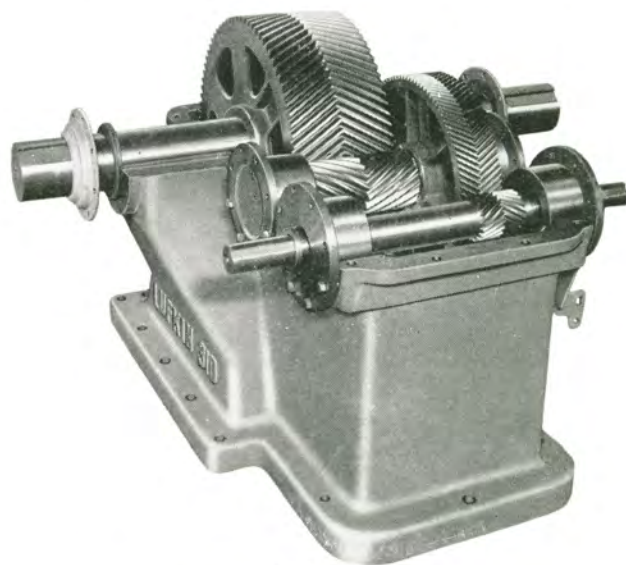


FIGURE 5

*Double Reduction Gear Unit, cover removed*

1. Housings especially built for oil well service, of rugged construction with large factors of safety.
2. Lufkin-Sykes Herringbone Gears, precision cut on our machines, are used exclusively in Lufkin units.
3. Gears Cases are jig bored to same accuracy as gears.
4. All Shafts forged from alloy steel, heat treated and precision ground.
5. Oversize Bronzoid Bearings on crankshafts. Easily renewable.


6. Crank Shaft held rigid by Bronzoid hub plates. All pinions float on Hy-Load Hyatt Roller Bearings.
7. No Oil Leaks. Pinion shaft bearings equipped with patented oil seals; main crankshaft with collar oil slinger and aluminum drain cover.
8. No Oil Pumps. Lufkin gears operate in oil bath with gear wipers to flood bearings.
9. Clam Shell Brake. No grabbing. Improved ratchet lever and stand, locomotive type.

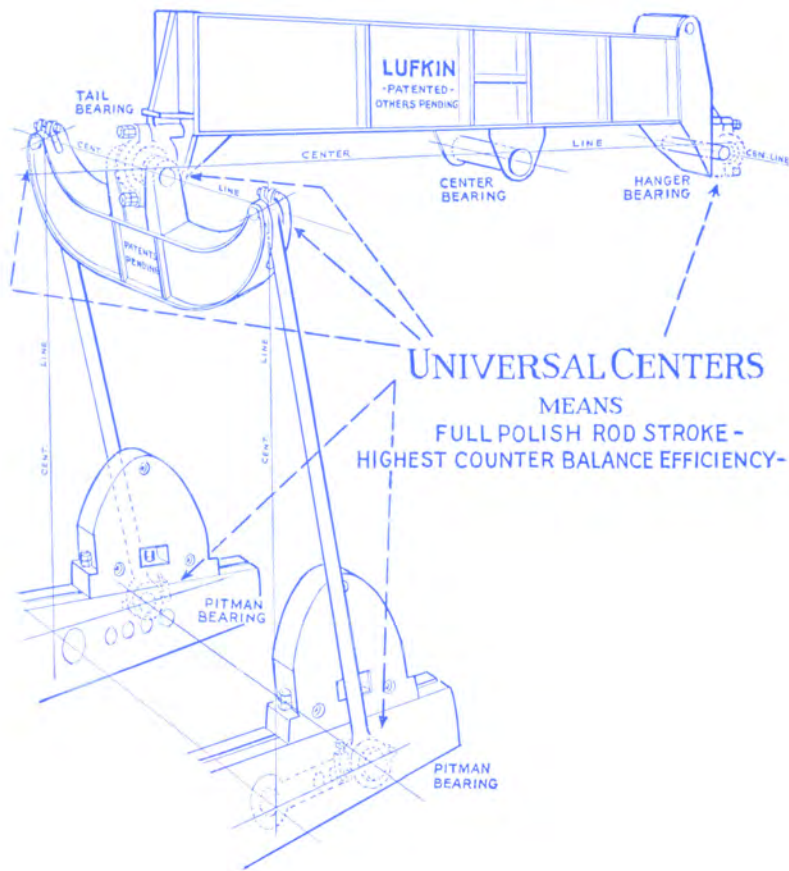

**WORKING "POINTS" THAT  
INSURE FULL STROKE ON  
POLISH RODS AND HIGHEST  
COUNTERBALANCE EFFICIENCY**

FIGURE 6

*Lufkin "Universal" Units have all working points on the center line*

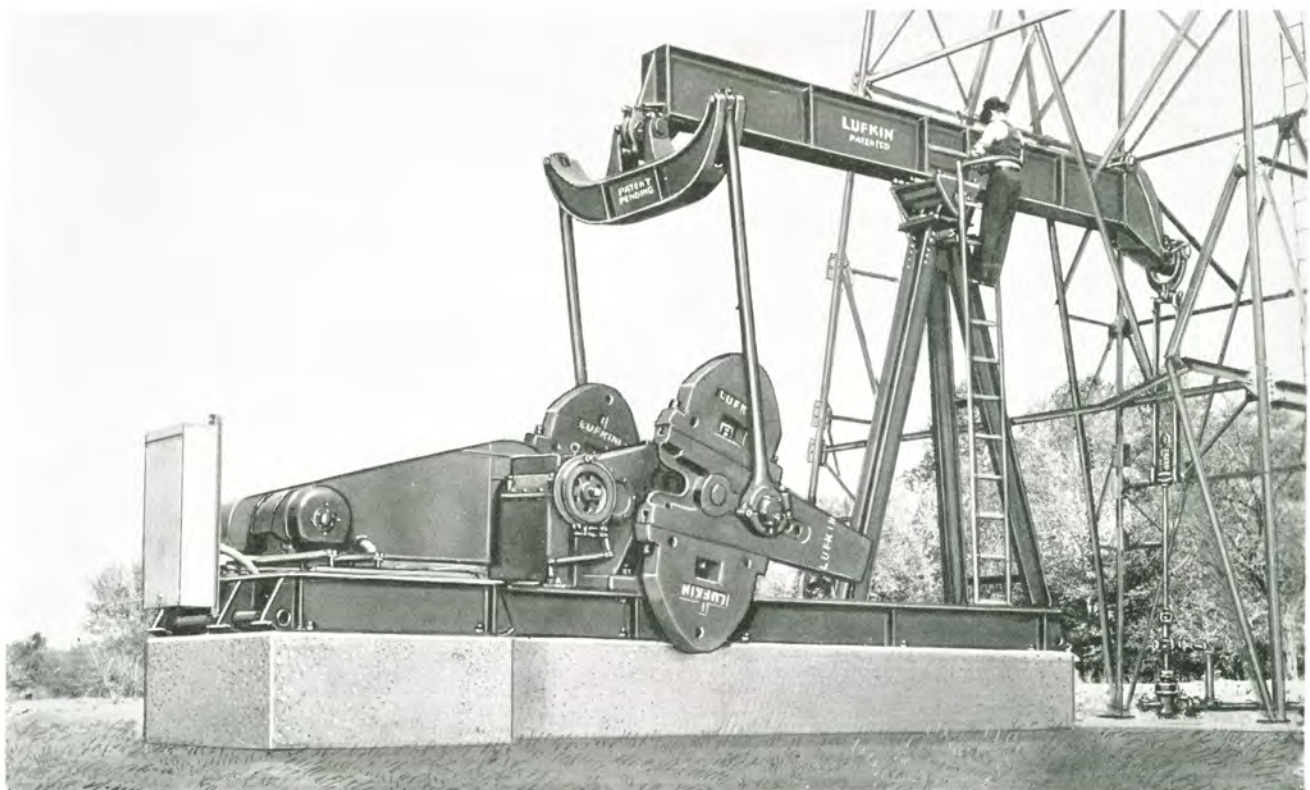

LUFKIN FOUNDRY &amp; MACHINE CO.

LUFKIN, TEXAS

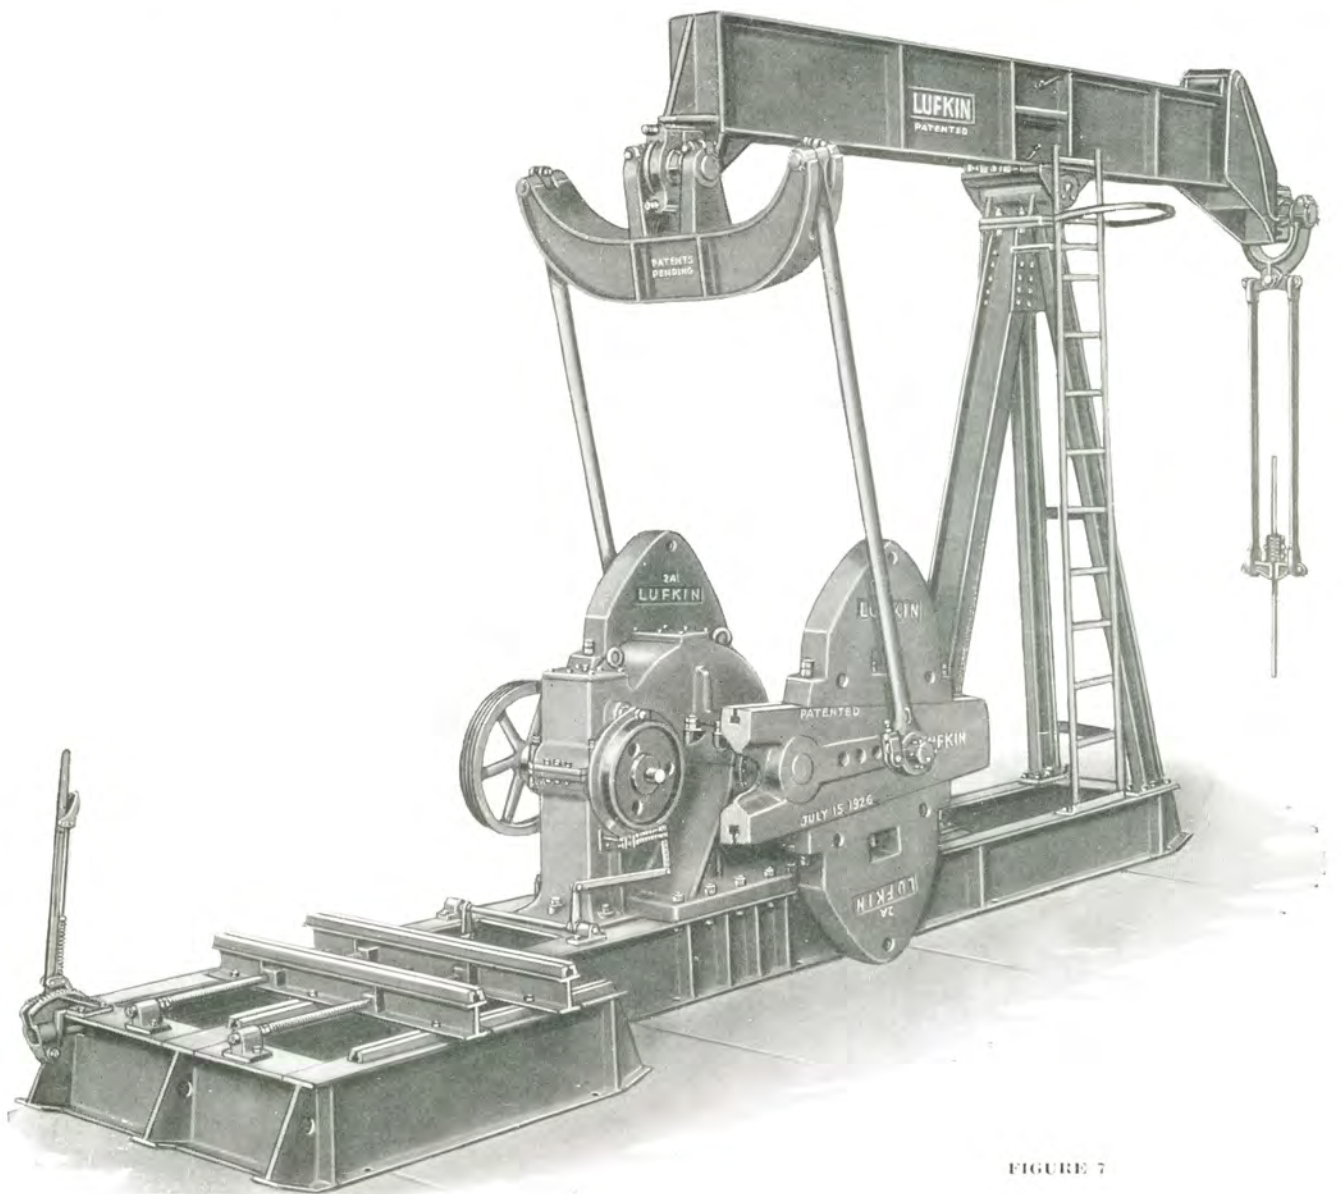


FIGURE 7

### THE LUFKIN UNIVERSAL CENTER LINE UNITS DESCRIPTION

The universal center line design, patented by LUFKIN, has many advantages over the other types of construction and no disadvantages that we know of.

Field tests have been made on pumping wells, comparing this design with that of the tail bearing mounted on top of the beam both with the gear box set directly under the tail bearing, and also with it set in back of it. The results show considerably more production due to better pump plunger action, and less power consumed per barrel of fluid pumped. Peak loads were less per barrel of fluid pumped with the LUFKIN design than the others tested.

Placing the tail bearing under the beam eliminates vibration in the walking beam which is caused by the

leverage which is necessarily imposed by the bearing when placed on top of the beam. No beam is made perfectly and beams break more easily due to twisting action when the load is applied to the top of the beam. Actual experience shows that in some cases LUFKIN walking beams are successfully carrying over double the A.P.I. rating and have been doing so for years.

The universal spherical bearing on the front and back of the walking beam is considerably more expensive to manufacture, as is the arch type equalizer. We are convinced, however, that this additional quality is justified in that it accounts for trouble free, long life operation.

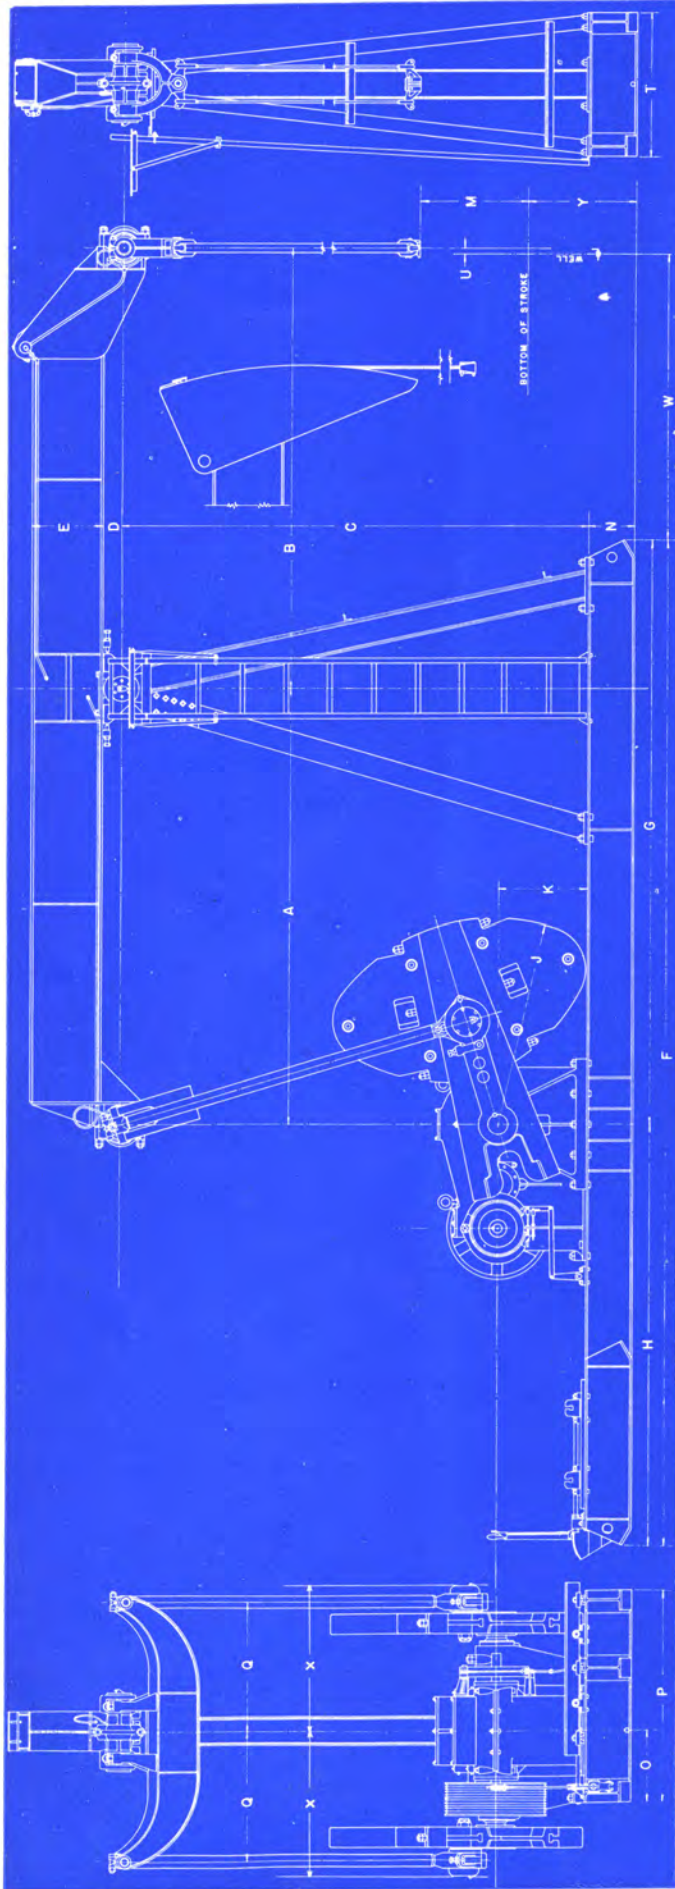


FIGURE 8

DIMENSION SHEET—LUFKIN UNITS TC-0A, 1A, 2A AND 3A

UNIT	A	B	C	D	E	F	G	H	J	K	M	N	O	P	Q	T	U	W	X	Y
TC-0A-1328-C	14'-0"	14'-2"	13'-3"	7"	24 1/4"	31'-6"	18'-4"	13'-2"	5'-11 1/4"	2'-6"	3'-1"	16"	2'-1"	6'-2"	*	4'-2"	2"	9'-8"	†	2'-9"
TC-0A-1325-C	12'-6"	12'-8 1/4"	13'-3"	7"	24 1/4"	30'-0"	16'-10"	13'-2"	5'-11 1/4"	2'-6"	3'-1"	16"	2'-1"	6'-2"	*	4'-2"	2 1/4"	8'-4 1/4"	†	2'-9"
TC-1A-1328-C	14'-0"	14'-2"	13'-3"	7"	24 1/4"	29'-6"	18'-3 1/4"	11'-2 1/4"	5'-5 1/4"	2'-4"	3'-1"	16"	2 1/4"	5'-11"	3'-33/8"	3'-7"	2"	9'-8 1/2"	3'-9 3/4"	2'-9"
TC-1A-1325-C	12'-6"	12'-8 1/4"	13'-3"	7"	24 1/4"	28'-0"	16'-9 1/4"	11'-2 1/4"	5'-5 1/4"	2'-4"	3'-1"	16"	2 1/4"	5'-11"	3'-33/8"	3'-7"	2 1/4"	8'-4 3/4"	3'-9 3/4"	2'-9"
TC-2A-1020-C	10'-0"	10'-2 1/4"	12'-1"	6"	24"	27'-3"	13'-9"	13'-6"	4'-11 1/4"	2'-3"	2'-8"	16"	18 1/2"	5'-5"	2'-11 1/8"	3'-1"	2 1/4"	6'-5 1/4"	3'-5 1/4"	2'-0"
TC-3A-8216-C	8'-0"	8'-2 1/4"	12'-0"	6"	20 7/8"	19'-4 3/4"	11'-2"	8'-2 3/4"	3'-9 1/4"	2'-3"	2'-3"	9 7/8"	16"	4'-8 1/2"	2'-7 1/8"	2'-8"	2 1/4"	4'-10"	3'-1 1/8"	1'-10"

\* For dimension "Q"—TC-0A-61—3'-8 5/8", TC-0A-60—3'-4 7/8"  
 † For dimension "X"—TC-0A-61—4'-3 3/4", TC-0A-60—3'-11 1/4".

Dimensions not guaranteed for settings—request certified prints.



# LUFKIN FOUNDRY & MACHINE CO.

# LUFKIN, TEXAS

## LUFKIN UNIVERSAL TC-0A UNIT ASSEMBLIES—30,000 Lb. Polish Rod Load

<p><b>WALKING BEAM:</b> 24" x 14" x 130 lbs., 12'-6" and 12'-6" working centers, or 14'-0" and 14'-0" working centers.</p> <p><b>HANGER:</b> Centerline type, Universal, bronze bushed.</p> <p><b>PITMAN:</b> Universal Equalizer with bearings "in line", 4" Heavy pipe connections, Universal lower bearings.</p> <p><b>CENTER BEARING:</b> No. 1AS bronze bushed, 7" x 20" oil bath, dust proof.</p> <p><b>SAMSON POST:</b> No. 13 Tripod, 13'-3" high.</p> <p><b>BASE:</b> 16" deep, 49 3/4" wide at gear box.</p> <p><b>CRANKS:</b> No. 7472, 71 1/2" radius.</p> <p><b>CRANK PINS:</b> 5 1/2" x 5 1/2", bronze bushed, oil bath.</p> <p><b>TAIL AND HANGER BEARINGS:</b> 4 1/4" x 12" Bronze Bushed.</p>		<b>TC-0A-61</b>	<b>TC-0A-60</b>	
	<b>GEARS</b> .....	Double Reduction Main Gear, 41.6" x 11"	Single Reduction Main Gear, 50" x 12"	
	<b>RATING</b> .....	103.3 H.P. at 20 S.P.M. 511,600 lb. ins. Peak Torque	85.5 H.P. at 20 S.P.M. 423,230 lb. ins. Peak Torque	
	<b>RATIO</b> .....	28.6	9.54	
	<b>CRANKSHAFT</b> .....	7"	6 1/8"	
	<b>SHEAVE</b> .....	34"-12C Std. 59 3/4" Maximum 3 7/8" Bore	37"-7D Std. 37" Maximum 3 1/8" Bore	
	<b>WEIGHT</b> .....	41,500 lbs.	39,735 lbs.	
	<b>STATIC COUNTERBALANCE—LBS.:</b>			
	<b>Stroke</b>	<b>No. 1 Weights</b>	<b>C.I. Auxiliary Weights</b>	
	34" .....	32,000	39,900	
44" .....	24,750	30,850		
54" .....	20,150	25,100		
64" .....	17,000	21,200		
74" .....	15,100	18,850		

## LUFKIN UNIVERSAL TC-1A UNIT ASSEMBLIES—25,000 Lb. Polish Rod Load

<p><b>WALKING BEAM:</b> 24" x 14" x 130 lbs., 12'-6" and 12'-6" working centers, or 14'-0" and 14'-0" working centers.</p> <p><b>HANGER:</b> Centerline type, Universal, bronze bushed.</p> <p><b>PITMAN:</b> Universal Equalizer with bearings "in line", 4" Heavy pipe connections, Universal lower bearings.</p> <p><b>CENTER BEARING:</b> No. 1AS bronze bushed, 7" x 20", oil bath, dust proof.</p> <p><b>SAMSON POST:</b> No. 13 Tripod, 13'-3" high.</p> <p><b>BASE:</b> 16" deep, 43" wide at gear box.</p> <p><b>CRANKS:</b> No. 7466, 65 1/2" radius.</p> <p><b>CRANK PINS:</b> 5 1/2" x 5 1/2", bronze bushed, oil bath.</p> <p><b>TAIL AND HANGER BEARINGS:</b> 4 1/4" x 12" Bronze Bushed.</p>		<b>TC-1A-41B</b>	<b>TC-1A-54B</b>	
	<b>GEARS</b> .....	Double Reduction Main Gear, 34" x 10"	Single Reduction Main Gear, 47" x 10"	
	<b>RATING</b> .....	57.7 H.P. at 20 S.P.M. 285,620 lb. ins. Peak Torque	67.8 H.P. at 20 S.P.M. 335,610 lb. ins. Peak Torque	
	<b>RATIO</b> .....	30.12	9.4	
	<b>CRANKSHAFT</b> .....	6 1/8"	6 1/8"	
	<b>SHEAVE</b> .....	24 1/2"-8C Std. 47 1/4" Maximum 2 1/8" Bore	34 1/2"-12C Std. 34 1/2" Maximum 3 1/8" Bore	
	<b>WEIGHT</b> .....	33,700 lbs.	33,600 lbs.	
	<b>STATIC COUNTERBALANCE—LBS.:</b>			
	<b>Stroke</b>	<b>No. 2 Weights</b>	<b>C.I. Auxiliary Weights</b>	
	34" .....	24,200	30,100	
44" .....	18,700	23,250		
54" .....	15,250	18,950		
64" .....	12,850	16,000		
74" .....	11,150	13,850		

## LUFKIN UNIVERSAL TC-2A UNIT ASSEMBLIES—20,000 Lb. Polish Rod Load

<p><b>WALKING BEAM:</b> 24" x 12" x 100 lbs., 10'-0" and 10'-0" working centers.</p> <p><b>HANGER:</b> Centerline type, Universal bronze bushed.</p> <p><b>PITMAN:</b> Universal Equalizer with bearings "in line", 3" Heavy pipe connections, Universal lower bearings.</p> <p><b>CENTER BEARING:</b> No. 2AS, bronze bushed, 6" x 17", oil bath, dust proof.</p> <p><b>SAMSON POST:</b> No. 12 Tripod, 12'-1", high.</p> <p><b>BASE:</b> 16" Deep, 37" wide at gear box.</p> <p><b>CRANKS:</b> No. 6460, 59 1/2" radius.</p> <p><b>CRANK PINS:</b> 4 3/4" x 4 3/4", bronze bushed, oil bath.</p> <p><b>TAIL AND HANGER BEARINGS:</b> 4 1/4" x 9 1/4" Bronze Bushed.</p>		<b>TC-2A-35</b>		<b>TC-2A-36</b>		
	<b>GEARS</b> .....	Double Reduction Main Gear: 30.3" P.D. 9" Face		Single Reduction Main Gear: 45.4" P.D. 8" Face		
	<b>RATING</b> .....	43.2 H.P. at 20 S.P.M. 214,000 lb. ins. Peak Torque		50.4 H.P. at 20 S.P.M. 249,480 lb. ins. Peak Torque		
	<b>RATIO</b> .....	28.45		9.94		
	<b>CRANKSHAFT</b> .....	6"		6"		
	<b>SHEAVE</b> .....	24 1/2"-6"C Std. 41 1/2" Maximum 2 1/8" Bore		34 1/2" P.D.—9"C Std 34 1/2" P.D. Maximum 3 3/8" Bore		
	<b>WEIGHT</b> .....	26,000 lbs.		25,900 lbs.		
	<b>STATIC COUNTERBALANCE—LBS.:</b>					
	<b>Stroke</b>	<b>No. 2A Wts.</b>	<b>Aux. Wts.</b>	<b>No. 2 Wts.</b>	<b>Aux. Wts.</b>	
	24" .....	25,950	31,950	28,800	35,950	
34" .....	18,300	22,550	20,350	25,350		
44" .....	14,150	17,400	15,700	19,600		
54" .....	11,550	14,200	12,800	15,950		
64" .....	9,750	12,000	10,800	13,500		

## LUFKIN UNIVERSAL TC-3A UNIT ASSEMBLIES—17,000 Lb. Polish Rod Load

<p><b>WALKING BEAM:</b> 21" x 9" x 82 lbs., 8'-0" and 8'-0" working centers.</p> <p><b>HANGER:</b> Universal center line type, bronze bushed.</p> <p><b>PITMAN:</b> Universal Equalizer with bearings "in line", 3" Heavy pipe connections, Universal lower bearings.</p> <p><b>CENTER BEARING:</b> No. 3AS bronze bushed, 6" x 14", oil bath, dust proof.</p> <p><b>SAMSON POST:</b> Tripod, 12'-0" high.</p> <p><b>BASE:</b> 10" deep, 32" wide at gear box.</p> <p><b>CRANKS:</b> No. 5446, 45 1/2" Radius.</p> <p><b>CRANK PINS:</b> 4 3/4" x 4 3/4", bronze bushed, oil bath.</p> <p><b>TAIL AND HANGER BEARINGS:</b> 4 1/4" x 9 1/4" bronze bushed.</p>		<b>TC-3A-22E</b>		<b>TC-3A-18B</b>		
	<b>GEARS</b> .....	Double Reduction Main Gear 25" x 7 5/8"		Single Reduction Main Gear 42" x 6"		
	<b>RATING</b> .....	29.2 H.P. at 20 S.P.M. 144,540 lb. ins. Peak Torque		33.0 H.P. at 20 S.P.M. 163,350 lb. ins. Peak Torque		
	<b>RATIO</b> .....	28.67		10.5		
	<b>CRANKSHAFT</b> .....	5 1/8"		5 1/8"		
	<b>SHEAVE</b> .....	24 1/2"-5C Std. 38" Maximum 2 1/8" Bore		32 1/4"-6C Std. 32 1/4" Maximum 2 1/8" Bore		
	<b>WEIGHT</b> .....	20,700 lbs.		20,700 lbs.		
	<b>STATIC COUNTERBALANCE—LBS.:</b>					
	<b>Stroke</b>	<b>No. 3 Regular Weights</b>		<b>Aux. Weights</b>		
	24" .....	14,500		20,900		
34" .....	10,250		14,750			
44" .....	7,925		10,400			
54" .....	6,450		9,300			

ALTERNATIVE SETTINGS—LUFKIN UNIT ASSEMBLIES TC-0A, 1A, 2A AND 3A

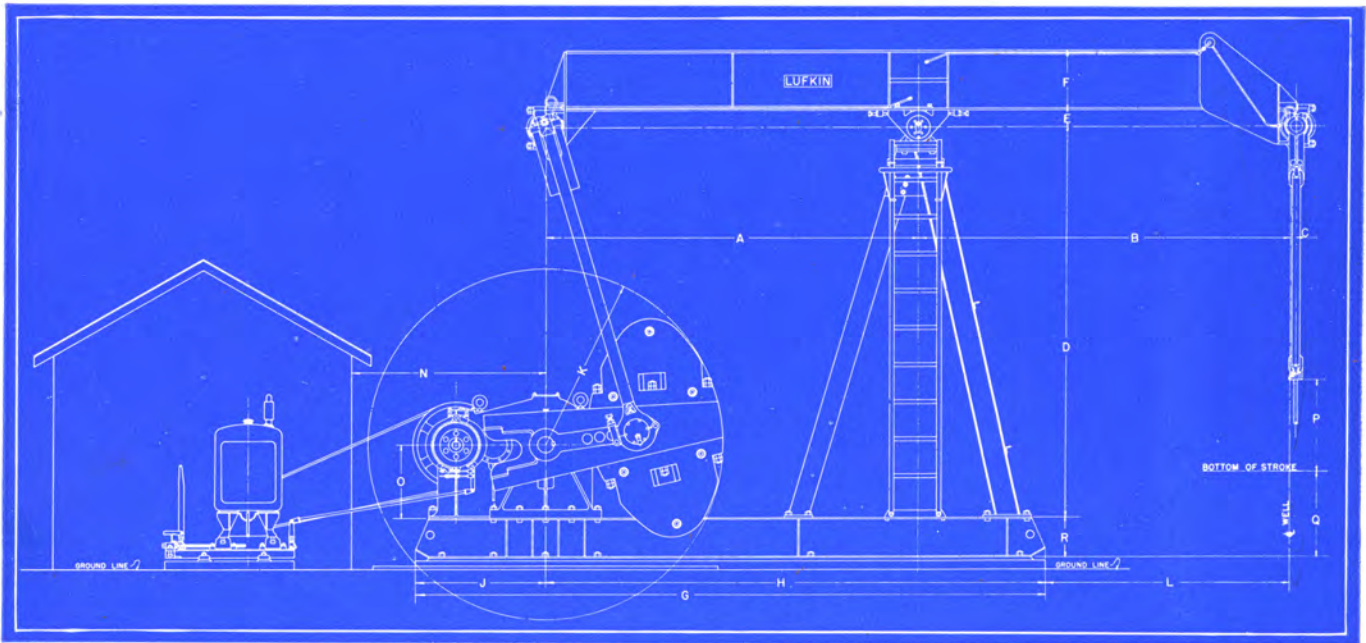


FIGURE 9

0A, 1A, 2A and 3A with Stub Base and House for Multi-Cylinder Gas Engine

LUFKIN UNIT ALTERNATIVES TC-0A, 1A, 2A AND 3A  
GENERAL DIMENSIONS

Unit	A	B	C	D	E	F	G	H	J	K	L	N	O	P	Q	R
TC-0A-1328C . . . .	14'-0"	14'-0"	2"	13'-3"	7"	24"	22'-9"	18'-4"	4'-5"	5'-11½"	9'-8"	6'-6"	2'-6"	3'-1"	2'-9"	16"
TC-0A-1325C . . . .	12'-6"	12'-6"	2¼"	13'-3"	7"	24"	21'-3"	16'-10"	4'-5"	5'-11½"	8'-4¼"	6'-6"	2'-6"	3'-1"	2'-9"	16"
TC-1A-1328C . . . .	14'-0"	14'-0"	2"	13'-3"	7"	24"	23'-7"	18'-3½"	5'-3½"	5'-5½"	9'-8½"	6'-3"	2'-4"	3'-1"	2'-9"	16"
TC-1A-1325C . . . .	12'-6"	12'-6"	2¼"	13'-3"	7"	24"	22'-1"	16'-9½"	5'-3½"	5'-5½"	8'-4¾"	6'-3"	2'-4"	3'-1"	2'-9"	16"
TC-2A-1020C . . . .	10'-0"	10'-0"	2¼"	12'-1"	6"	24"	18'-0"	13'-9"	4'-3"	4'-11½"	6'-5¼"	5'-6"	2'-3"	2'-8"	2'-0"	16"
TC-3A-8216C . . . .	8'-0"	8'-0"	2¼"	12'-0"	6"	20¾"	14'-7½"	11'-2"	3'-5½"	3'-9½"	4'-10"	4'-4"	2'-3"	2'-3"	1'-10"	9¾"

Ask for Certified Print before making foundations.

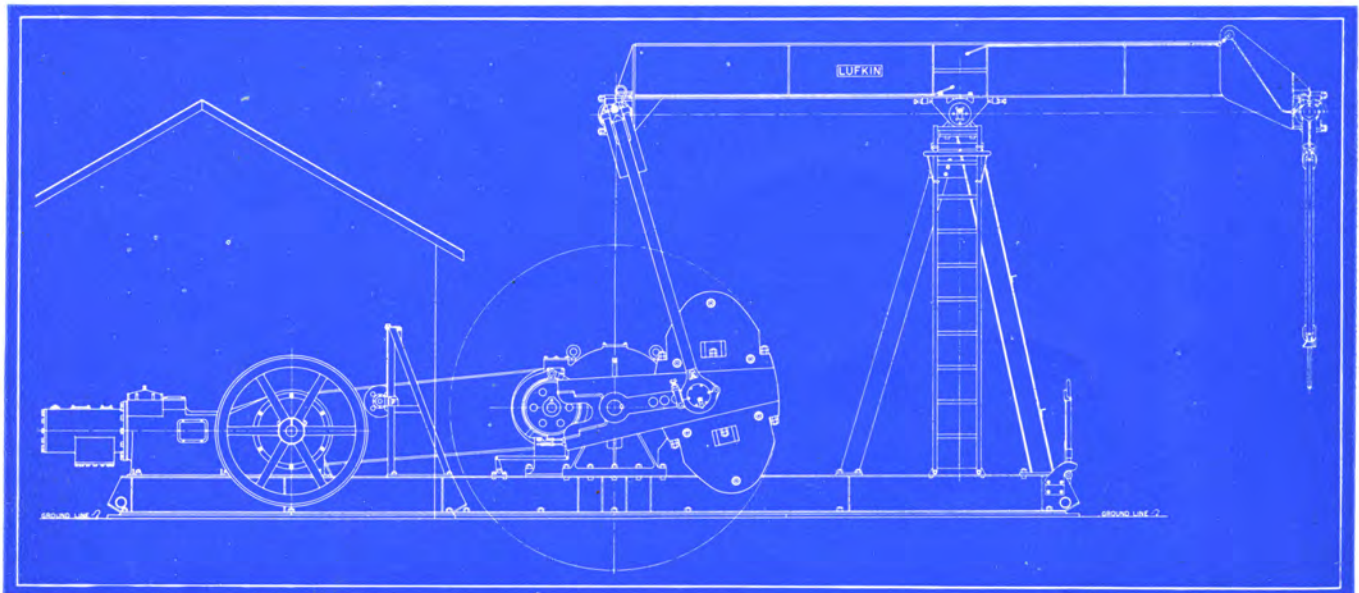


FIGURE 10

0A Unit with Long Bed Plate in Two Sections to Take Single Cylinder Engines. Also Furnished with 1A, 2A and 3A Assemblies.

LUFKIN FOUNDRY & MACHINE CO.


LUFKIN, TEXAS



*Bell Crank Take Off for Pumping Extra Wells may be applied to all Lufkin Units.*



*Safety Oiling Platform may be furnished at additional charge.*

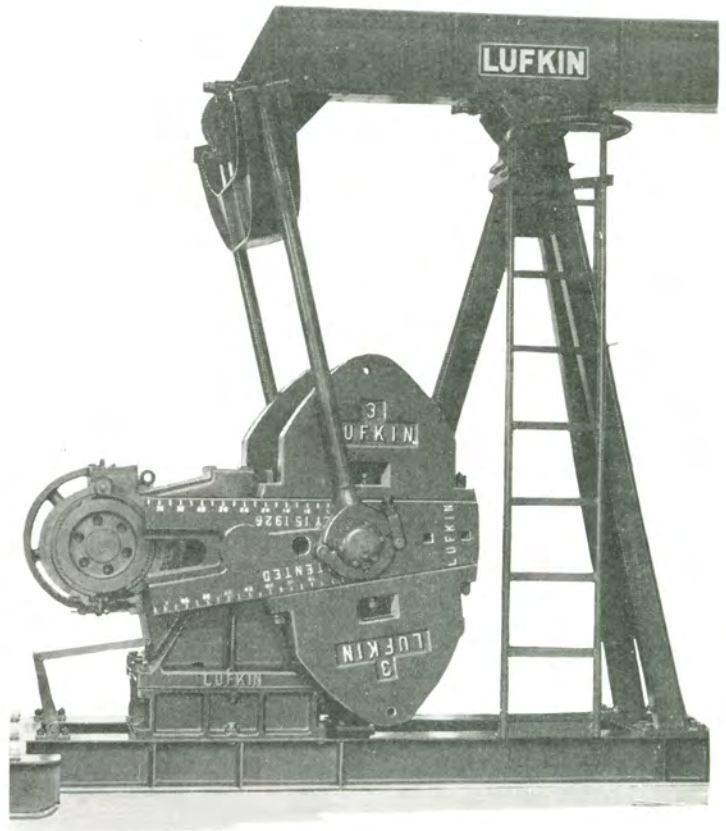

*Special Sub Base under Gear Unit where necessary for Cranks to clear derrick floor.*

# LUFKIN FOUNDRY & MACHINE CO.

# LUFKIN, TEXAS

## GENERAL SPECIFICATIONS—LUFKIN UNIT ASSEMBLIES TC2, 3, 44, AND 5C

### LUFKIN UNIVERSAL TC-2 UNIT ASSEMBLIES—20,000 Lbs. Polish Rod Load

<b>WALKING BEAM:</b> 21" x 9" x 82 lbs., 8'-0" and 8'-0" working centers. <b>HANGER:</b> Hinged Horsehead with 1" wire rope on equalizing sheave. <b>PITMAN:</b> Universal Equalizer with bearings "in line", 3" heavy pipe connections, Universal lower bearings. <b>CENTER BEARING:</b> No. 2AS, bronze bushed 6" x 17", oil bath, dust proof. <b>SAMSON POST:</b> No. 12 Tripod, 12'-1" high. <b>BASE:</b> 16" deep, 37" wide at gear box, 22'-1" long. <b>CRANKS:</b> No. 6456, 55½" radius. <b>CRANK PINS:</b> 4¾" x 4½" bronze bushed, oil bath. <b>TAIL BEARING:</b> 4⅞" x 9¼", bronze bushed.	<b>GEARS</b> .....	<b>TC-2-35</b>		<b>TC-2-36</b>		
	<b>RATING</b> .....	Double Reduction Main Gear: 30.3" P.D. 9" Face		Single Reduction Main Gear: 45.4" P.D. 8" Face		
	<b>RATIO</b> .....	43.2 H.P. at 20 S.P.M. 214,000lb. ins. Peak Torque		50.4 H.P. at 20 S.P.M. 249,480lb. ins. Peak Torque		
	<b>CRANKSHAFT</b> .....	28.45		9.94		
	<b>SHEAVE</b> .....	6"		6"		
	<b>WEIGHT</b> .....	24½"-6"C" Std. 41½" Maximum 2⅞" Bore		34¼" P.D. 9"C" Std. 34¼" Maximum 3⅞" Bore		
	<b>STATIC COUNTERBALANCE—LBS.:</b>					
		<b>Stroke</b>	<b>No. 2A Wts.</b>	<b>Aux. Wts.</b>	<b>No. 2 Wts.</b>	<b>Aux. Wts.</b>
		24".....	22,950	28,350	25,420	31,840
		34".....	16,200	20,000	17,950	22,470
	44".....	12,500	15,460	13,870	17,360	
	54".....	10,200	12,600	11,300	14,150	
	64".....	8,600	10,630	9,530	11,940	

### LUFKIN UNIVERSAL TC-3 UNIT ASSEMBLIES—17,000 Lbs. Polish Rod Load

<b>WALKING BEAM:</b> 18" x 8¾" x 64 lbs., 7'-0" and 5'-3¼" working centers. <b>HANGER:</b> Hinged Horsehead with 1" wire line on equalizing sheave <b>PITMAN:</b> Universal Equalizer with bearings "in line", 3" heavy pipe connections, Universal lower bearings. <b>CENTER BEARING:</b> No. 3AS bronze bushed, 6" x 14", oil bath, dust proof. <b>SAMSON POST:</b> Tripod, 10'-4" high. <b>BASE:</b> 10" deep, 32" wide at gear box, 17'-1½" long. <b>CRANKS:</b> No. 4146, 45½" radius. <b>CRANK PINS:</b> 4¾" x 4½", bronze bushed, oil bath. <b>TAIL BEARING:</b> 4⅞" x 9¼", bronze bushed.	<b>GEARS</b> .....	<b>TC-3-22E</b>		<b>TC-3-18B</b>		
	<b>RATING</b> .....	Double Reduction Main Gear 25" x 7½"		Single Reduction Main Gear 42" x 6"		
	<b>RATIO</b> .....	29.2 H.P. at 20 S.P.M. 144,540 lb. ins. Peak Torque		33.0 H.P. at 20 S.P.M. 163,350 lb. ins. Peak Torque		
	<b>CRANKSHAFT</b> .....	28.67		10.5		
	<b>SHEAVE</b> .....	5⅞"		5⅞"		
	<b>WEIGHT</b> .....	24½"-5C Std. 38" Maximum 2⅞" Bore		32¼"-6C Std. 32¼" Maximum 2⅞" Bore		
	<b>STATIC COUNTERBALANCE—LBS.:</b>					
		<b>Stroke</b>	<b>No. 3 Reg. Wts.</b>	<b>C.I. Kidney Aux. Wts.</b>		
		27.9".....	12,550	18,050		
		41.2".....	8,500	12,250		
	54".....	6,450	9,300			

### LUFKIN UNIVERSAL TC-44 UNIT ASSEMBLIES—13,500 Lbs. Polish Rod Load

<b>WALKING BEAM:</b> 16" x 8½" x 58 lbs., 6'-0" and 6'-0" working centers. <b>HANGER:</b> Hinged Horsehead with ⅞" wire line on equalizing sheave. <b>PITMAN:</b> Universal Equalizer with bearings "in line", 2½" heavy pipe connections, Universal lower bearings. <b>CENTER BEARING:</b> No. 4AS, bronze bushed, 5" x 10½", oil bath, dust proof. <b>SAMSON POST:</b> Tripod, 8'-9½" high. <b>BASE:</b> 8" deep, 25" wide at gear box, 16'-1¼" long. <b>CRANKS:</b> No. 4846, 46" radius. <b>CRANK PINS:</b> 3¾" x 3½", bronze bushed, oil bath. <b>TAIL BEARING:</b> 3⅞" x 7¼", bronze bushed.	<b>GEARS</b> .....	<b>TC-44-15</b>		<b>TC-44-24</b>		
	<b>RATING</b> .....	Double Reduction Main Gear: 24" P.D. 6¼" Face		Single Reduction Main Gear: 36¼" P.D. 5½" Face		
	<b>RATIO</b> .....	19.8 H.P. at 20 S.P.M. 98,000 lb. ins. Peak Torque		24.6 H.P. at 20 S.P.M. 121,750 lb. ins. Peak Torque		
	<b>CRANKSHAFT</b> .....	29.4		9.67		
	<b>SHEAVE</b> .....	4⅞" Diameter		4⅞" Diameter		
	<b>WEIGHT</b> .....	19¼"-4C Std. 33¼" Maximum 1⅞" Bore		28"-6C Std. 28" Maximum 2⅞" Bore		
	<b>STATIC COUNTERBALANCE—LBS.:</b>					
		<b>Stroke</b>	<b>No. 5A Reg. Wts.</b>	<b>Aux. Wts.</b>		
		24".....	12,465	16,060		
		32".....	9,350	12,050		
	40".....	7,480	9,640			
	48".....	6,230	8,030			

### LUFKIN UNIVERSAL TC-5C UNIT ASSEMBLIES—10,000 Lbs. Polish Rod Load

<b>WALKING BEAM:</b> 14" x 8" x 43 lbs., 5'-0" and 5'-0" working centers. <b>HANGER:</b> Removable Horsehead with ¾" wire line. <b>PITMAN:</b> Universal Cross Pin Type Equalizer. Side Members 4" I Beams. <b>CENTER BEARING:</b> Bronze bushed, 4⅞" x 9". <b>SAMSON POST:</b> Tripod, 8'-0" high. <b>BASE:</b> 6" deep, 25" wide at gear box, 14'-5" long. <b>CRANKS:</b> No. 4242C, 42" radius. <b>CRANK PINS:</b> 3¾" x 3½", bronze bushed, oil bath. <b>TAIL BEARING:</b> 3⅞" x 6½", bronze bushed.	<b>GEARS</b> .....	<b>TC-5C-7B</b>		<b>TC-5C-16</b>		
	<b>RATING</b> .....	Double Reduction Main Gear 19½" x 5"		Single Reduction Main Gear 32½" x 4"		
	<b>RATIO</b> .....	11.1 H.P. at 20 S.P.M. 54,945 lb. ins. Peak Torque		14.7 H.P. at 20 S.P.M. 72,685 lb. ins. Peak Torque		
	<b>CRANKSHAFT</b> .....	29.32		10		
	<b>SHEAVE</b> .....	4"		4"		
	<b>WEIGHT</b> .....	19½"-3-C Std. 27¼" Maximum 1⅞" Bore		24"-5-C Std. 24" Maximum 2⅞" Bore		
	<b>STATIC COUNTERBALANCE—LBS.</b>					
		<b>Stroke</b>	<b>No. 5C Wts.</b>	<b>With Aux. Wts.</b>		
		22".....	8,860	12,950		
		32".....	6,090	8,925		
	42".....	4,640	6,800			

LUFKIN FOUNDRY & MACHINE CO.

LUFKIN, TEXAS

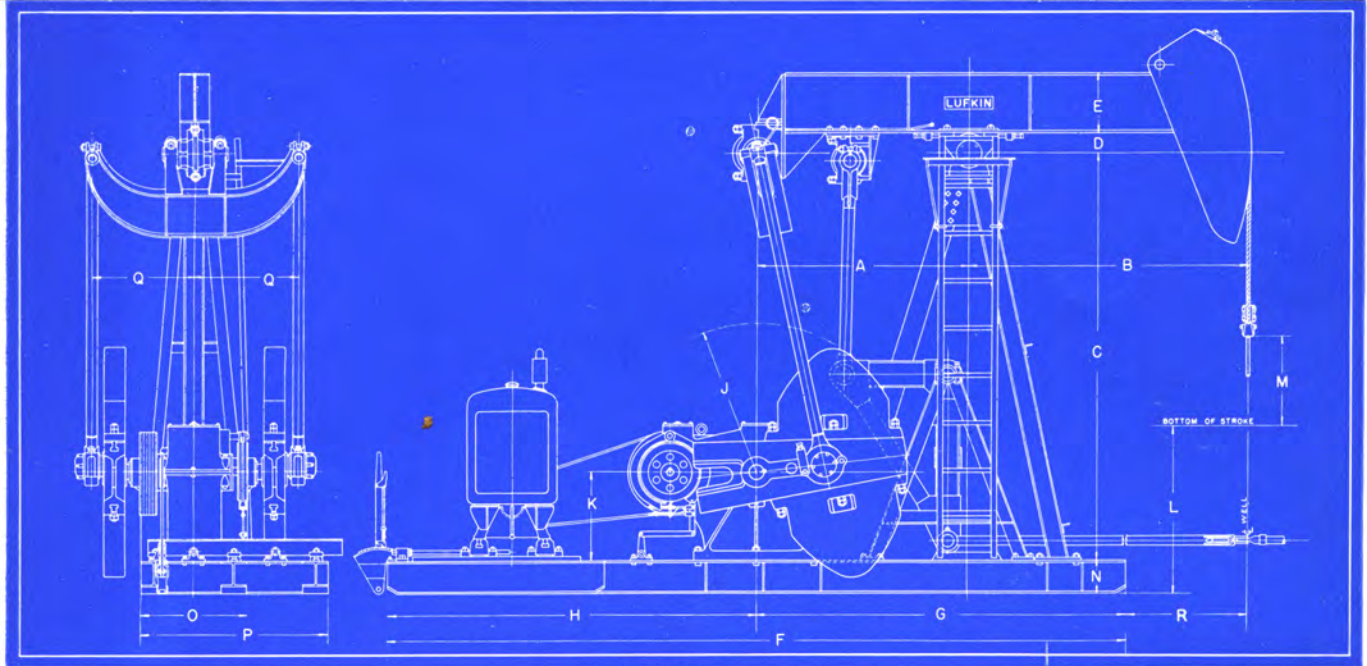


FIGURE 12

Standard Assembly illustrating bell-crank connection for one additional well, applicable to the TC-2, 3, 44 and 5C assemblies. Furnished at Extra Cost.

LUFKIN UNIT ASSEMBLIES TC-2, 3 AND 44  
GENERAL DIMENSIONS

UNIT	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	Q	R
TC-2.....	8'-0"	8'-0"	12'-1"	6"	21"	22'-1"	11'-9"	10'-4"	4'-7½"	2'-3"	5'-0½"	2'-8"	16"	3'-1"	5'-5"	2'-11⅞"	4'-3"
TC-3.....	5'-3¼"	7'-0"	10'-4"	6"	18"	17'-1½"	8'-10¾"	8'-2¾"	3'-9½"	2'-3"	5'-2½"	2'-3"	10"	2'-8"	4'-8½"	2'-7⅞"	3'-4½"
TC-44.....	6'-0"	6'-0"	8'-9½"	6"	15⅞"	16'-1¼"	7'-9¼"	8'-4"	3'-10"	18"	3'-5½"	24"	8"	2'-1"	4'-1"	2'-4⅞"	4'-2¾"

Ask for certified print before making foundation. Note: TC-44 has Trout Simplified Cranks.

ALTERNATIVE FEATURES

Lufkin TC-2, 3 and 44 assemblies with Stub Base and Gas Engine Drive.



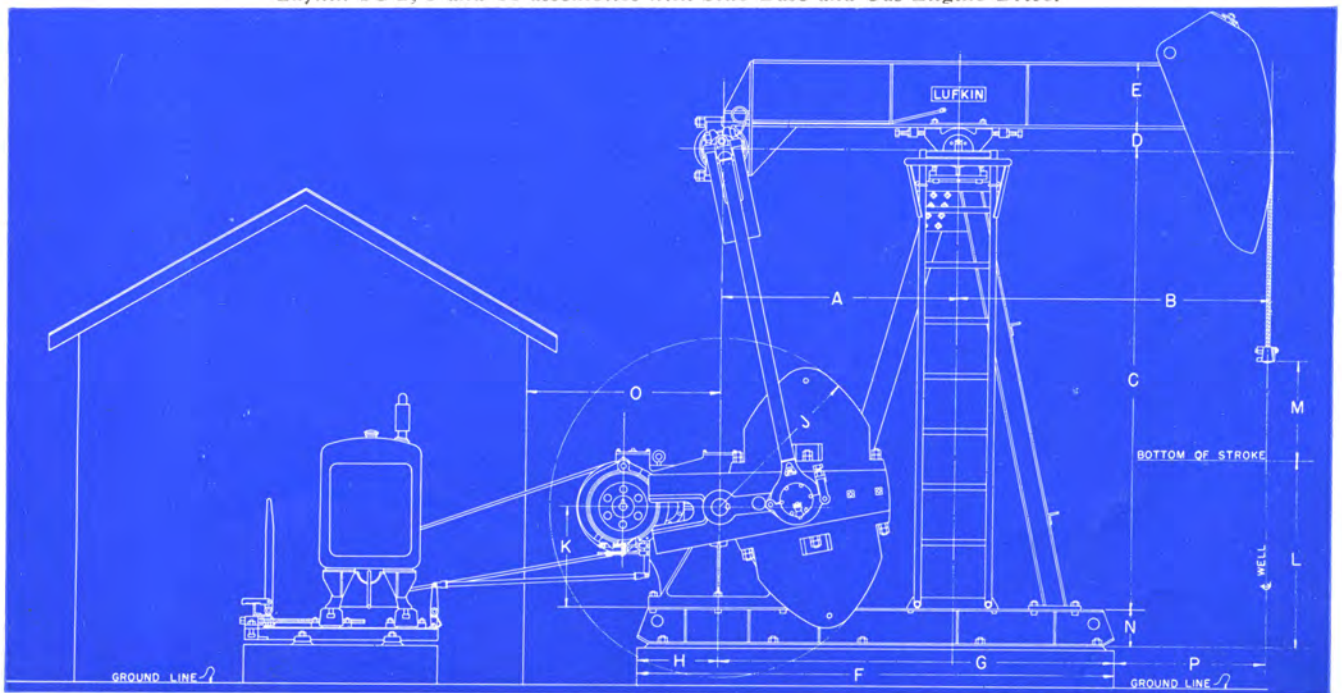


FIGURE 13

UNIT	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P
TC-2.....	8'-0"	8'-0"	12'-1"	6"	21"	14'-0"	11'-9"	2'-3"	4'-7½"	2'-3"	5'-0½"	2'-8"	16"	5'-6"	4'-3"
TC-3.....	5'-3¼"	7'-0"	10'-4"	6"	18"	11'-10¾"	8'-5¼"	3'-5½"	3'-9½"	2'-3"	5'-2½"	2'-3"	10"	4'-4"	3'-10"
TC-44.....	6'-0"	6'-0"	8'-9½"	6"	15⅞"	10'-7¼"	7'-9¼"	2'-10"	3'-10"	18"	3'-6½"	24"	8"	4'-4"	4'-2¾"

LUFKIN TC-5-C ASSEMBLY

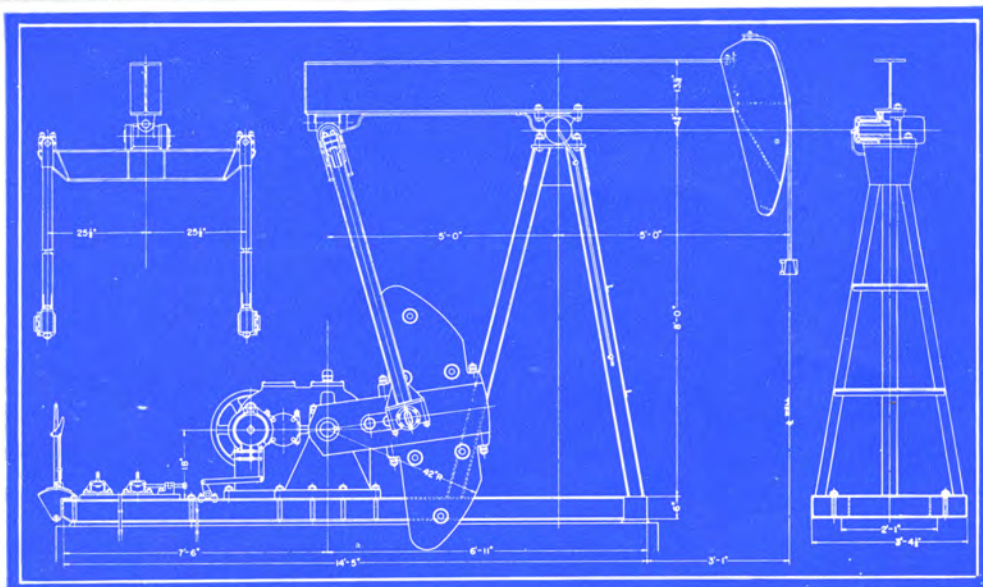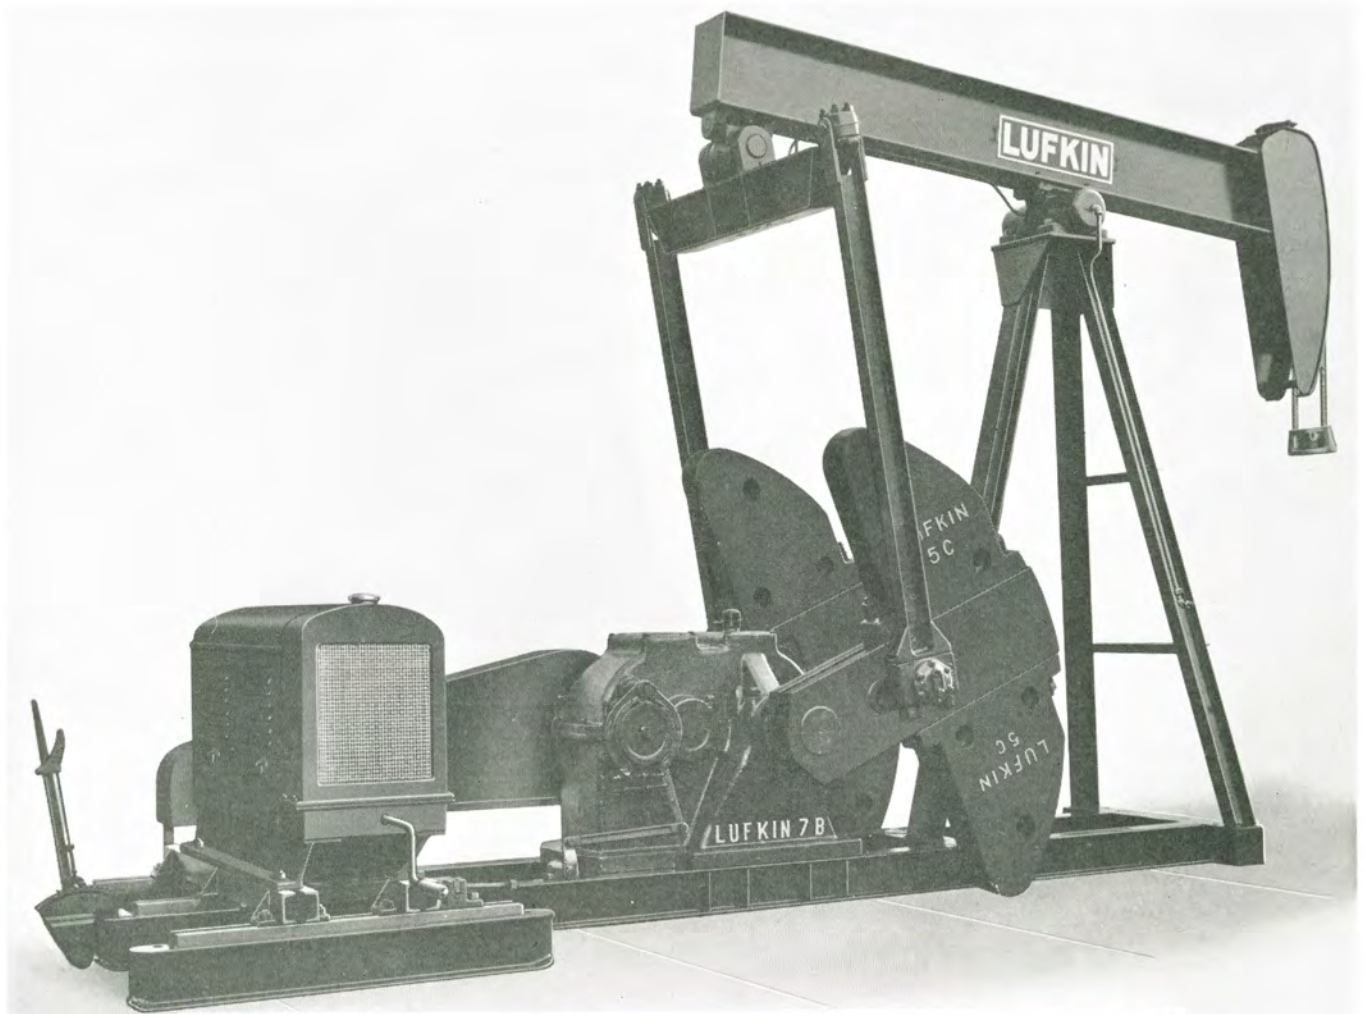

The Lufkin TC-5-C Assembly Dimension Drawing.

For specifications see page 1558.

LUFKIN FOUNDRY & MACHINE CO.

LUFKIN, TEXAS

GENERAL DATA CONCERNING THE LUFKIN  
TC-66-5A AND TC-77-3 UNIT ASSEMBLIES



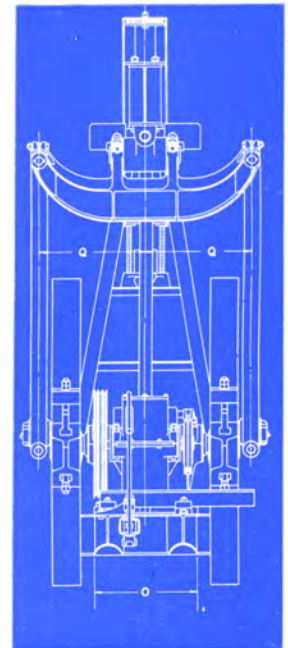


FIGURE 15

Detail Drawing Lufkin TC-66-5A and 77-3

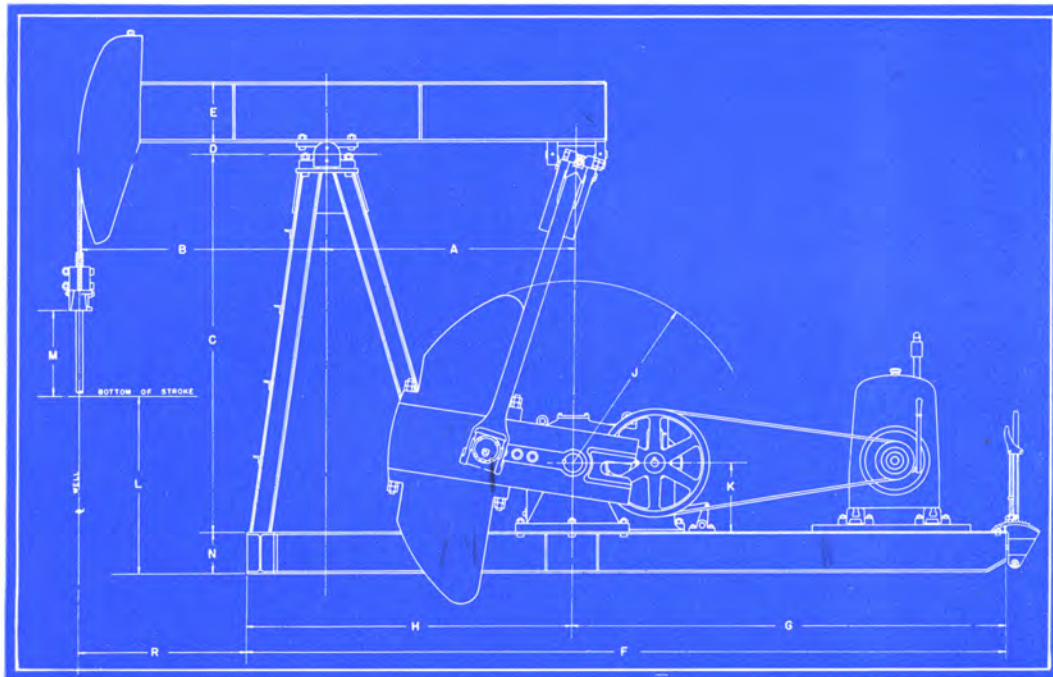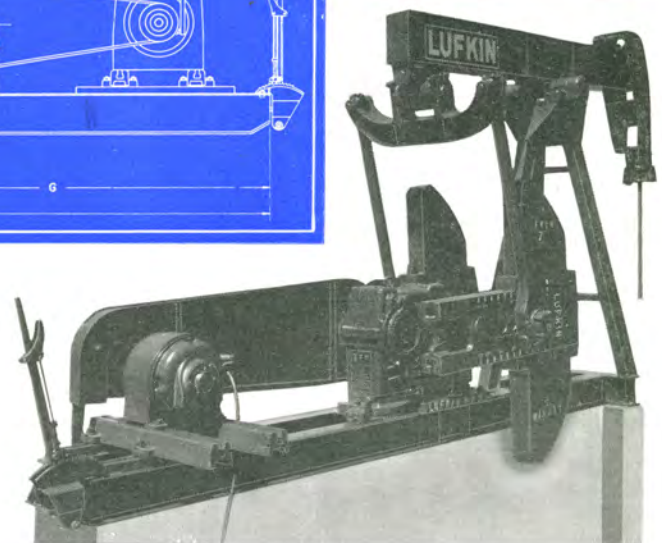

SCHEDULE OF TABULATED DIMENSIONS

Unit	A	B	C	D	E	F	G	H	J	K	L	M	N	O	Q	R
TC-77-3 Unit.....	3'-6"	3'-6"	5'-3"	2¼"	9⅞"	11'-0"	6'-4"	4'-8"	32"	14"	3'-0¼"	12"	6¼"	17"	17½"	2'-4"
TC-66-5A Unit.....	4'-0"	4'-0"	6'-2⅞"	2¼"	12"	12'-3"	7'-0"	5'-3"	36"	14"	2'-9¾"	17"	8"	20"	20¾"	2'-9"

SPECIFICATIONS—Lufkin Universal TC-66-5A and TC-77-3 Unit Assemblies

		TC-66-5A		TC-77-3	
<b>HANGER:</b> Removable Horsehead with ¾" Wire Line.					
<b>PITMAN:</b> Universal Equalizer with Bearings "in line", Malleable Iron Side Members of "I" Section, Universal Lower Bearing.					
<b>CENTER BEARING:</b> Bronze Bushed, Oil Bath, 2 1/8" x 10 1/2".					
<b>BRAKE:</b> Double Shoe with Locomotive Type Control Lever.					
<b>STATIC COUNTERBALANCE—LBS.</b>					
	TC-66-5A		TC-77-3		
<b>Stroke</b>	<b>With No. 6 Weights</b>	<b>With Aux. Weights</b>	<b>Stroke</b>	<b>With No. 7 Weights</b>	
16.....	8,480	10,700	12	6,200	
22.....	6,160	7,780	18	4,125	
28.....	4,850	6,115	24	3,100	
34.....	3,985	5,040			
<b>GEARS</b> .....	Double Reduction Main Gear 15" x 4"		Double Reduction Main Gear 13" x 3 5/8"		
<b>RATING</b> .....	6.5 Nominal H.P. at 20 S.P.M.		4.1 Nominal H.P. at 20 S.P.M.		
	32,140 lb. ins. Peak Torque		20,400 lb. ins. Peak Torque		
<b>RATIO</b> .....	24.97		29.46		
<b>CRANKSHAFT</b> .....	3 7/16"		3"		
<b>CRANKS</b> .....	3436-36" Radius		2432-32" Radius		
<b>POLISH ROD CAP.</b> .....	8,000 lbs.		6,000 lbs.		
<b>SHEAVE</b> .....	21" P.D.—3-B Grooves		17 1/2" P.D.—3A Grooves		
<b>BELTS</b> .....	136 B		128 A		
<b>WALKING BEAM</b> .....	12" x 6 1/2" x 28 lbs.; 4'-0" and 4'-0" Working Centers		9 7/8" x 5 3/4" x 21 lbs. 42" x 42" Working Centers		
<b>SAMSON POST</b> .....	Tripod: 6'-2 7/8" High		Tripod: 5'-3" High		
<b>BASE</b> .....	8" Deep, 20" Wide at Gear Box, 12'-3" long		6" Deep, 17" Wide at Gear Box, 11'-0" long		
<b>FOUNDATION BOLTS</b> .....	14—7/8"		12—¾"		
<b>WEIGHT</b> .....	6,875 lbs.		4,600 lbs.		

LUFKIN SIMPLIFIED LONG STROKE UNITS


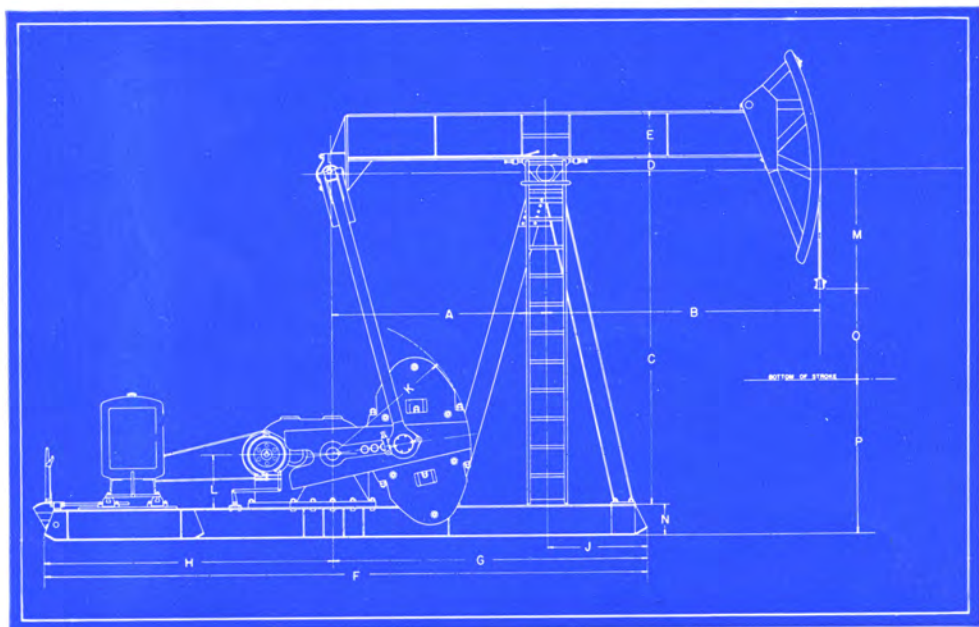


FIGURE 16

GENERAL DIMENSIONS LUFKIN LONG STROKE UNITS

UNIT	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P
TC-OL-61.....	10'-11 $\frac{1}{4}$ "	14'-0 $\frac{3}{4}$ "	14'-6"	7"	24 $\frac{3}{4}$ "	28'-5"	15'-1"	13'-4"	4'-1 $\frac{3}{4}$ "	78"	2'-6"	5'-7"	16"	54"	5'-9"
TC-OOL-71... ..	11'-9"	15'	16'	9"	33"	30'-9"	16'-5"	14'-4"	4'-8"	82"	3'	7'-1"	21"	60"	5'-8"

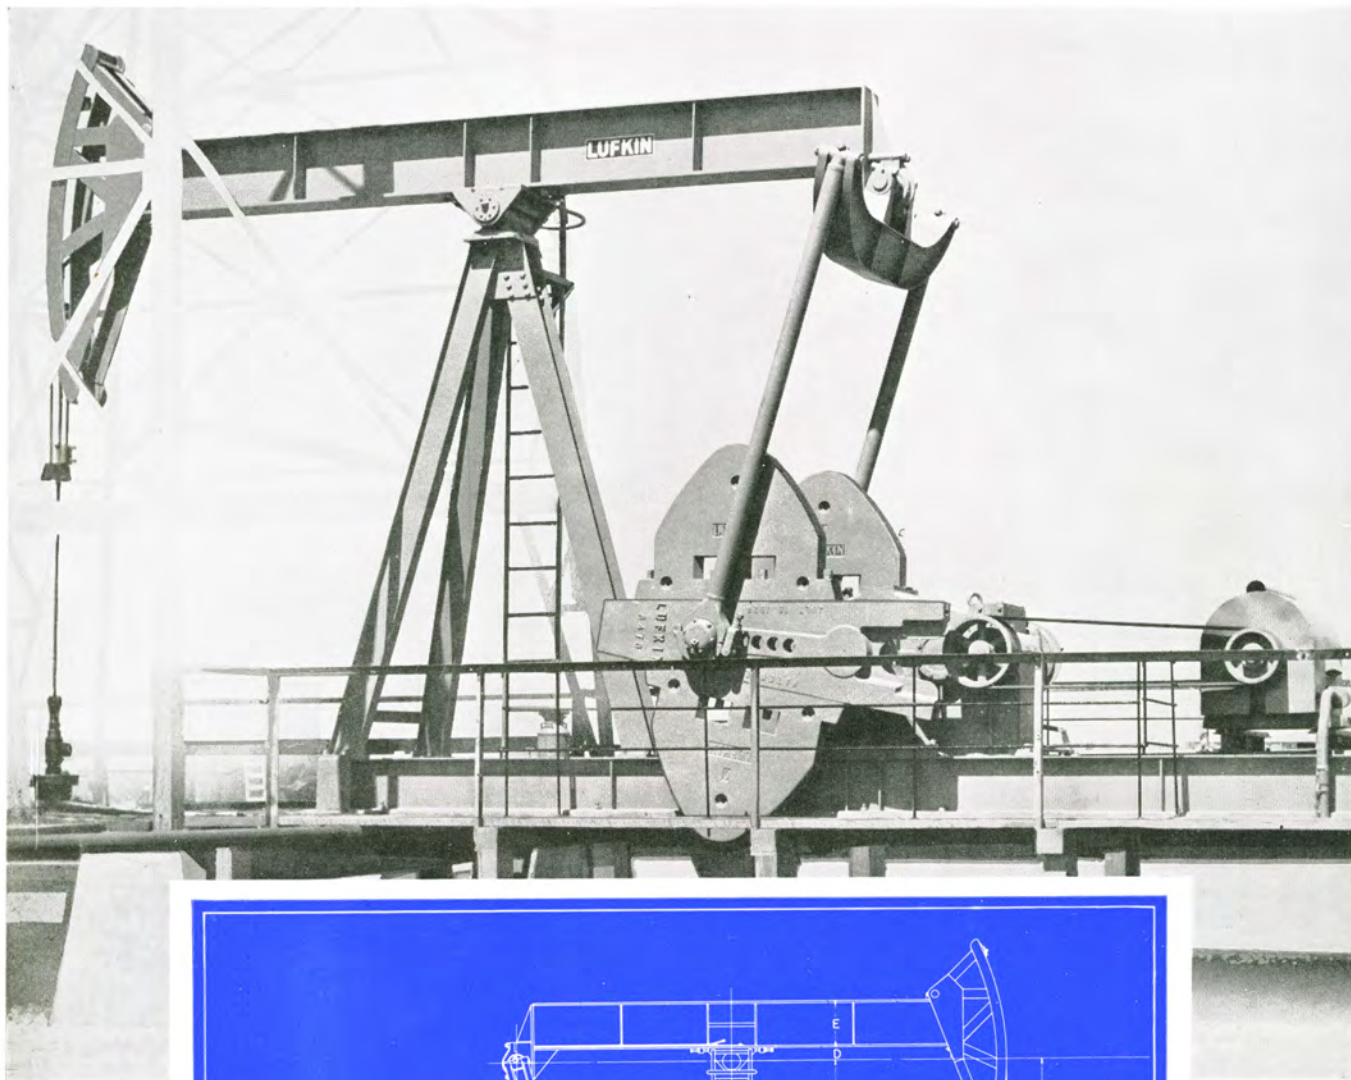

**LUFKIN FOUNDRY & MACHINE CO.**

**LUFKIN, TEXAS**

**LUFKIN SIMPLIFIED LONG STROKE UNIT**

*(Illustrated on the opposite page)*

Lufkin Long Stroke Units were engineered and built expressly to

1. Handle extremely large volumes of fluid from nominal depths.
2. Handle moderate fluid volume from extreme depths.
3. Reduce peak loading and minimize sucker rod failures.
4. Increase pump volumetric efficiency when handling gassy fluid.

With three years' long stroke experience in nine California fields, in several Mid-Continent fields, and in foreign fields as well; our present design is time-tested and proven as the most satisfactory medium for handling the toughest pumping jobs yet con-

ceived. Our Number 61 gear which replaces the Number 51-B gear on the Nine-Foot Stroke Unit is a result of analysis of complete test data obtained in field experience, the increased rating of the Number 61 allows more universal application.

The Ten-Foot Number 71 Unit is the "Big Bertha" of the industry, with the largest gear box ever built for oil field service. Its enormous capacity is indicative of its ability to subject the proposed 1 1/8" sucker rods to their ultimate allowable working stress. Field experience has demonstrated that this is the unit for obtaining the absolute maximum in production.

Of identical design with our smaller twin crank units, these long-strokers provide simplicity, ease of counter-balance adjustment, and smoothness of operation, and require practically no attention.

**LUFKIN TC-OL AND TC-OOL ASSEMBLIES**

**SPECIFICATIONS**

	TC-OOL-71	TC-OL-61		TC-OOL-71	TC-OL-61
<b>WALKING BEAM</b>	33"x15 3/4"x200 lb. 15'-0" and 11'-9" Working Centers	24"x14"x160 lb. 14'-0 3/4" and 10'-11 1/4" Working Centers	<b>GEARS</b>	Double Reduction Main Gear 50.4"x12"	Double Reduction Main Gear 41.6"x11"
<b>HANGER</b>	Hinged Horsehead with 4-1" Wire Ropes	Hinged Horsehead with 1 1/2" Wire Ropes	<b>RATING</b>	151.5 H.P. @ 20 S.P.M. Peak Torque 750,000 lb. Ins.	103.2 H.P. @ 20 S.P.M. Peak Torque 511,600 Lb. Ins.
<b>PITMAN</b>	Universal Equalizer, "In Line" Brgs., 5" XX Pipe	Universal Equalizer, "In Line" Brgs., 5" X Hvy. Pipe	<b>RATIO</b>	28.72	28.6
<b>CENTER BEARING</b>	Bronze Bushed 7 1/2"x22 1/2" Oil Bath, Dust Proof	Bronze Bushed 7"x20" Oil Bath, Dust Proof	<b>CRANKSHAFT</b>	7 7/8"	7"
<b>SAMSON POST</b>	Tripod, 16'-0" High	Tripod, 14'-6" High	<b>SHEAVE</b>	35"-10-D Std., 70" Max. 4 1/8" Bore	34"-12-C Std., 59 3/4" Max. 3 1/8" Bore
<b>BASE</b>	21" Deep, 60 1/2" Wide, at Gear Box, 30'-9" Long	16" Deep, 4'-2" Wide at Gear Box, 28'-5" Long	<b>WEIGHT</b>	65,000	48,645
<b>CRANKS</b>	No. 9482, 82" Radius	No. 8478, 78" Radius	<b>STATIC COUNTERBALANCE—LBS.</b>		
<b>CRANK PINS</b>	7"x6 1/2", Oil Bath, Bronze Bushed	7"x6 1/2", Oil Bath, Bronze Bushed	<b>TC-OOL-71</b>		<b>TC-OL-61</b>
<b>TAIL BEARING</b>	5 1/8"x13 1/2" Bronze Bushed	4 1/8"x12" Bronze Bushed	<b>Stroke</b>	<b>Reg. Wts.</b>	<b>With Aux. Wts.</b>
			43.38 . . .	45,250	55,800
			58.69 . . .	33,500	41,250
			74 . . . . .	26,500	32,700
			89.3 . . . .	22,000	27,150
			104.6 . . . .	18,750	23,100
			120 . . . . .	16,300	20,200
			46.44 . . .	35,250	44,530
			61.92 . . .	26,440	33,390
			77.4 . . . .	21,150	26,720
			92.88 . . .	17,620	22,260
			108.36 . . .	15,110	19,080

LUFKIN FOUNDRY & MACHINE CO.

LUFKIN, TEXAS

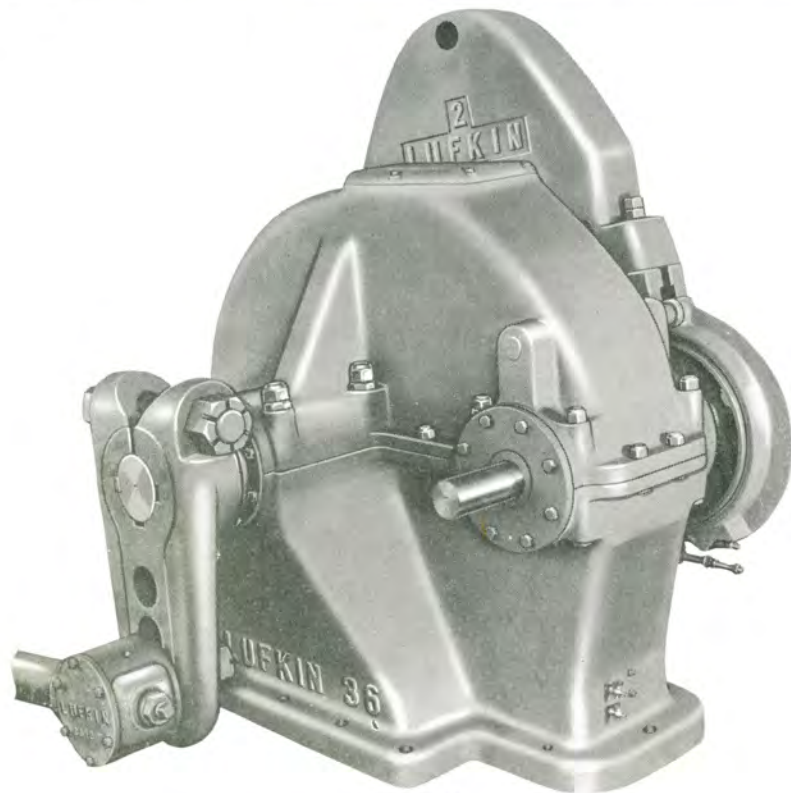


FIGURE 17

LUFKIN SINGLE CRANK UNITS

All Lufkin units, both single and double reduction types are built as illustrated with the sheave on the left side and brake on the right. The main counterbalance, of course, is on the right. The back-side crank is on the left. The sheave and brake can be reversed, if necessary, to suit special requirements. The cut to the right illustrates a complete and standard unit with the exception of the back-crank, which is extra and considered special.

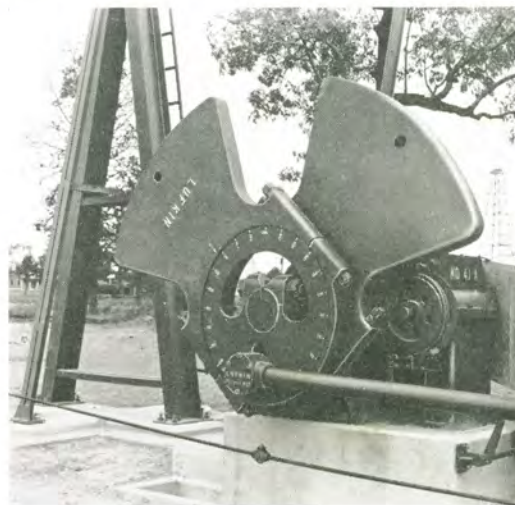


FIGURE 22

GENERAL SPECIFICATIONS SINGLE CRANK UNITS

UNIT No.	Type of Gears	Nom. H.P. at 20 s.p.m.	Peak Torque in Lb. Inches	Ratio	Diam. Face Main Gear	Crank Shaft Dia.	Bore Drive Sheave	Sheave P.D. and No. Grooves	Center of Crank to Base of Unit	Crank and Wts	Stroke	Static Center-Balance, Lbs.	
												Reg. Wts.	Aux. Wts.
61.....	DR	103.3	511,600	28.6	41.6"x11"	7"	3 7/16"	34"-12C Std. 59 3/4"-Max.	30"	7472 and No. 1	34"	16,000	19,950
60.....	SR	85.5	423,230	9.54	50"x12"	6 1/16"	3 11/16"	37"-7D Std. 37"-Max.	30"		44"	12,350	15,400
54-B.....	SR	67.8	335,610	9.4	47"x10"	6 7/16"	3 7/16"	34 1/4"-12C Std. 34 1/4"-Max.	28"	6466 and No. 2	64"	8,500	10,600
41-B.....	DR	57.7	285,620	30.12	34"x10"	6 7/16"	2 11/16"	24 1/4"-8C Std. 47 1/4"-Max.	28"		71"	7,550	9,400
35.....	DR	43.2	214,000	28.45	30"x 9"	6"	2 7/16"	24 1/4"-6C Std. 41 1/4"-Max.	27"	5460 and No. 2	34"	12,100	15,050
36.....	SR	50.4	249,480	9.94	45"x 8"	6"	3 7/16"	34 1/4"-9C Std. 34 1/4"-Max.	27"		44"	9,350	11,650
22-E.....	DR	29.2	144,540	28.67	25"x7 7/8"	5 7/16"	2 7/16"	24 1/4"-5C Std. 38"-Max.	27"	4456 and No. 2A	64"	6,450	8,000
18-B.....	SR	33.0	163,350	10.5	42"x6"	5 7/16"	2 11/16"	32 1/4"-6C Std. 32 1/4"-Max.	27"		24"	14,400	17,950
24.....	SR	24.6	121,750	9.67	36 1/4"x5 1/2"	4 1/16"	2 11/16"	28"-6C Std. 28"-Max.	21"	4456 and No. 2A	34"	11,500	14,150
16.....	SR	14.7	72,685	10	32 1/2"x4"	4"	2 7/16"	24"-5C Std. 24"-Max.	18"		34"	8,100	10,000
15.....	DR	19.8	98,000	29.4	24"x6 1/4"	4 7/16"	1 11/16"	19 1/4"-4C Std. 33 1/4"-Max.	18"		44"	6,300	7,750

LUFKIN FOUNDRY & MACHINE CO.


LUFKIN, TEXAS



Single Crank Unit on Steel Base

Bottom: Similar installation of heavier type with Universal Hanger and double channel single arm take-off pumping two additional wells.



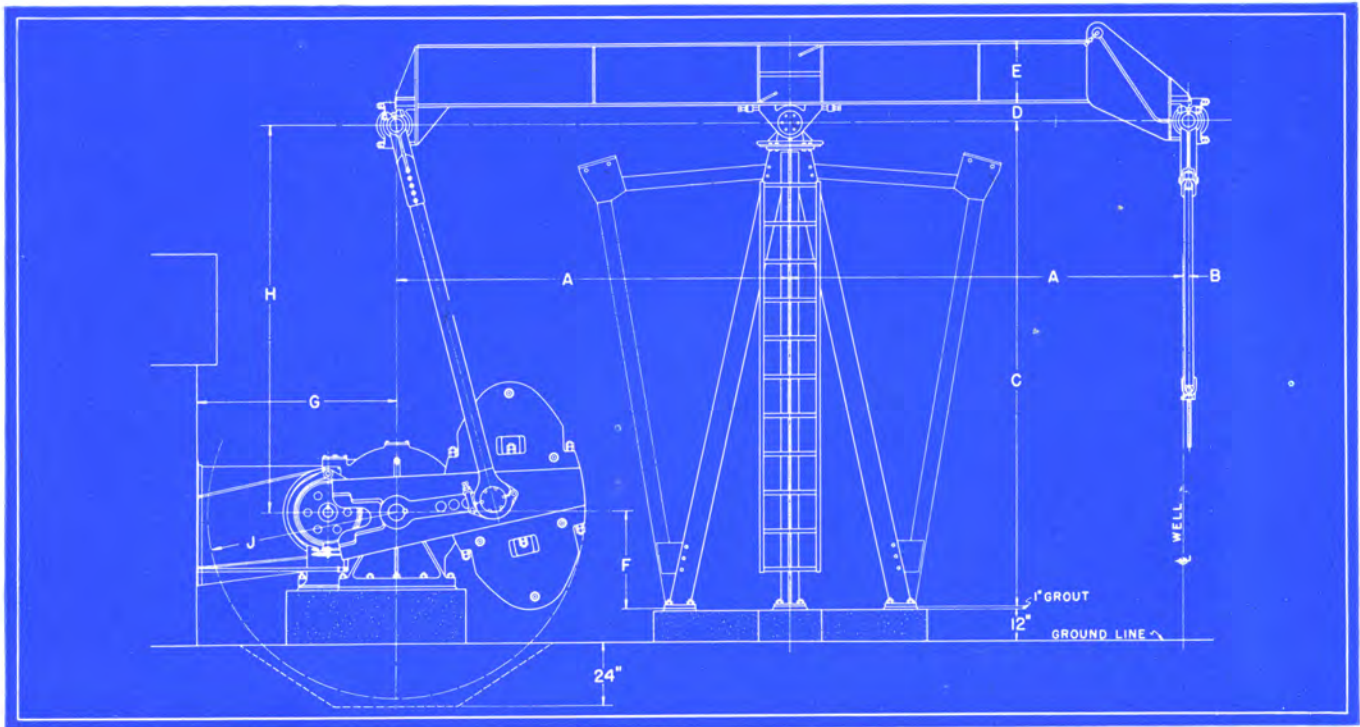

**FIGURE 19**  
**Lufkin Single Crank Unit Assembly—Crank in Sump**  
**GENERAL DIMENSIONS**

Assembly	A	B	C	D	E	F	G	H	J
100.....	14'-0"	2"	17'-6"	7"	24"	3'-1"	6'-6"	14'-5"	5'-11½"
200.....	12'-6"	2¼"	15'-7"	7"	24"	3'-1"	6'-6"	12'-6"	5'-11½"
300.....	12'-6"	2¼"	15'-5"	6"	24"	2'-7"	6'-3"	12'-10"	5'-5½"
400.....	8'-0"	2¼"	13'-6"	6"	21"	2'-1"	5'-6"	11'-5"	4'-11½"†

† No. 15, 16 and 24 Unit furnished with 4'-7½" Radius Crank. If crank sump not desired subtract 2'-0" from "H."

**POLISH ROD CAPACITIES OF LUFKIN WALKING BEAMS**  
**FOR SINGLE AND TWIN CRANKS**

Walking Beam Number	Section	Working Centers	RATING, POUNDS		Where Used
			A.P.I.	A.I.S.C.	
1625-CU.....	24" x 14"—160 lb	25'	22,051	44,900	OL—61 and 60
1328-CU.....	24" x 14"—130 lb	28'	16,800	30,565	TC-0A—SC-100 and 200
1325-CU.....	24" x 14"—130 lb	25'	19,750	35,860	TC-0A and 1A—SC-100 and 200
1025-CU.....	24" x 12"—100 lb	25'	13,900	25,285	SC-300
1020-CU.....	24" x 12"—100 lb	20'	19,000	34,570	TC-2A
1020-CUH.....	24" x 12"—100 lb	20'	19,000	34,570	TC-2A
8216-CUH.....	21" x 9"—82 lb	16'	15,800	28,500	TC-2 and TC-3A—SC-400
6412-CUH.....	18" x 8¾"—64 lb	12'-3¼"	13,450	24,400	TC-3
5812-CUH.....	16" x 8½"—58 lb	12'	12,700	22,850	TC-44
4310-CUH.....	14" x 8"—43 lb	10'	10,450	18,786	TC-5C
2808-CUH.....	12" x 6½"—28 lb	8'	7,420	13,350	TC-66
2107-CUH.....	10" x 5¾"—21 lb	7'	5,120	8,640	TC-77

**LUFKIN UNIVERSAL SAMSON POST ASSEMBLIES**  
**GENERAL SPECIFICATIONS**

Assembly	Units Generally Used	BEAM SPECIFICATIONS					Post Specifications			Center Bearing No. & Size	PITMAN		Crank Pin Size	Tail & Hanger Bearing Size	
		No.	Depth	Width Flange	Weight Per Ft.	Centers	A.P.I. Rating	Height	Type		Cap.	Pipe Size			Centers
100	61, 60, 41-B, 54-B	1328CU	24"	14"	130	28'	16,800	17'-6"	AT	40,750	1-AS 7"x20"	5"		5½"x5½"	5"x12"
200	41-B, 54-B	1325CU	24"	14"	130	25'	19,750	15'-7"	AT	47,800	1-AS 7"x20"	5"	See Table	5½"x5½"	5"x12"
300	41-B, 54-B, 35, 36	1025CU	24"	12"	100	25'	13,900	15'-5"	AT	47,800	2-AS 6"x17"	4"	Above	5½"x5½"	5"x 9"
400	35, 36, 22-D, 18-B, 16, 15, 24	8216CUH	21"	9"	82	16'	15,800	13'-6"	AT	46,090	2-AS 6"x17"	4"		5½"x5½"	5"x 9"

Note: Headache Posts and Foundation Bolts furnished at Extra Price when specified.

**LUFKIN FOUNDRY & MACHINE CO.**

**LUFKIN, TEXAS**

**LUFKIN COMBINED VERTICAL SWING TAKE-OFF AND KNOCK-OUT**




**FIGURE 20—Patents allowed and others pending**

The Lufkin combined vertical swing take-off and knock-out attachment is a great improvement over the earlier designs. Most important is the method of rolling the weight to any desired point simply by loosening two bolts on the weight saddle and turning the crank. Both operations can be accomplished by one man on the ground in a few minutes.

Hooking on and off wells is accomplished by one lever with no chance of injury to the operator.

The whole structure is thoroughly and substantially built of heavy structural steel with a view to rigidity and steady operation. As will be noted on Page 1568, Fig. 28, crank pin and bearing are of the improved type, adjustable for wear, and dust proof. The same bearing is in the swing take-off, the connection being made of 4" pipe. Saddle bearings are bronze bushed and oil tight. Knockoff arrangement is of all steel forgings and made to give efficient lasting service.

**LUFKIN VERTICAL SWING TAKE-OFF**

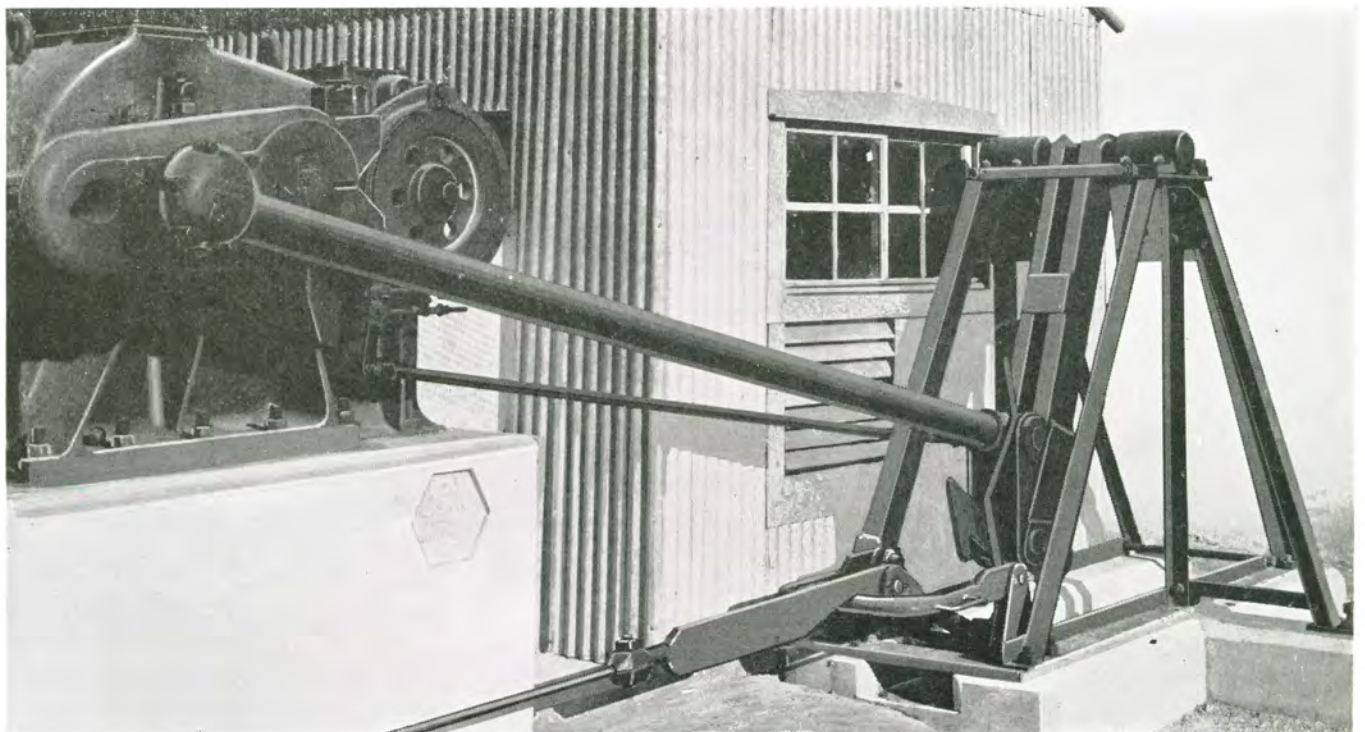

**FIGURE 21**

LUFKIN FOUNDRY & MACHINE CO.

LUFKIN, TEXAS

**OIL TIGHT—BRONZE BUSHED CENTER BEARING**

Patents Pending



FIGURE 25

Series "A" Center Bearings are full Bronzoid bushed, with patent oil seals and are designed to allow beam to headache to about 40° either front or back and as usual with Lufkin center bearings, beams can be swung sideways about 25° from center line. We believe this is a superior bearing in every respect, being dust proof, oil tight with renewable bronzoid bushing. They have ample bearing surface.

**BABBITED OIL BATH CENTER BEARINGS, SERIES B & C**



FIGURE 29

Series "B" and "C" Bearings listed below show our babbitted center bearings which are oil bath, but only reasonably dust proof, as blue print shows. This bearing is lined with a special high grade tin base metal to withstand the severe service of heavy loads and has ample oil capacity.

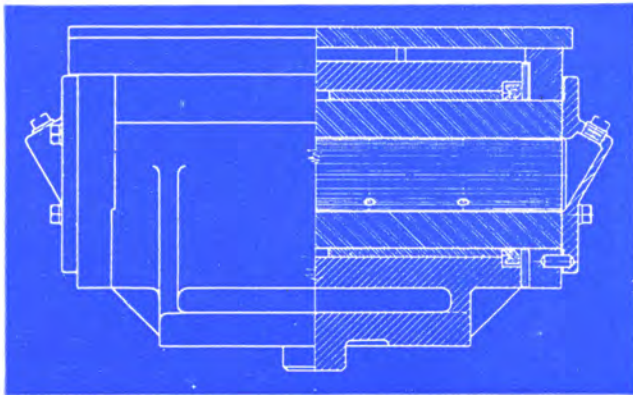


FIGURE 26

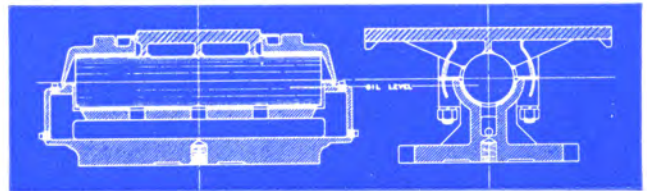


FIGURE 30

Center Bearing No.	Size Bearing	Where Used
1-AS .....	7" x 20"	TC No. 0-A and No. 1-A SC No. 100 & 200 Long Stroke
2-AS.....	6" x 17"	TC No. 2 and No. 2-A SC No. 300 & 400
3-AS.....	6" x 14"	TC No. 3 and No. 3-A
4-AS.....	5" x 10 1/2"	TC No. 44

Center Bearing No.	Size Bearing	Where Used
1-B.....	5" x 24"	TC No. 1-A SC No. 300
2-B.....	5" x 18"	TC No. 2 and No. 2-A SC No. 400
2-C.....	5" x 24"	TC No. 2 and No. 2-A SC No. 400
3-B.....	4" x 18"	TC No. 3 TC No. 44
3-C.....	5" x 18"	TC No. 3

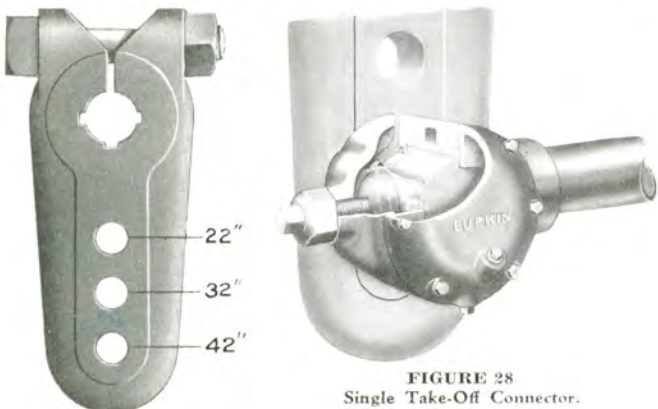


FIGURE 27

FIGURE 28  
Single Take-Off Connector.

LUFKIN BACK-SIDE CRANKS

- 3 Hole 42" stroke—Max. Bore 6-7/16"—No. 1910-W
- 3 Hole 36" stroke—Max. Bore 5-7/16"—No. 2059-W
- 3 Hole 30" stroke—Max. Bore 4-7/16"—No. 2060-W

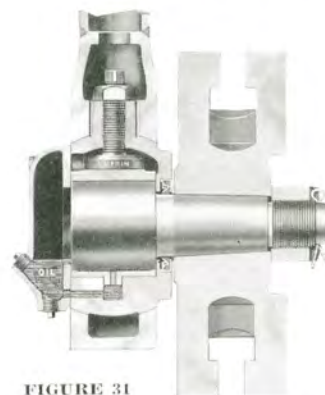


FIGURE 31

General characteristics of the new "Universal" pitman are:

1. One-third more bearing surface.
2. Bronzoid Bearings top and bottom, with adjustable top bearing.
3. Patented oil seal—no leaks. No head of oil against seal.
4. Both the interior of the strap and the exterior of the pitman box are machined, and thus insure alignment without possibility of binding.
5. The pitman bearing is adjustable when strap or shackle is removed, and may be tested by hand before shackle is re-applied.
6. Lufkin Universal pitmans are designed to pull or push—no lost motion.
7. Journal box is semi-steel; straps and shackles are of cast steel welded to extra heavy tubing.
8. Crank pins are forged alloy steel turned and ground.


ROLLER BEARING PITMANS ARE FURNISHED WHEN DESIRED AT SLIGHT EXTRA COST.

LUFKIN FOUNDRY & MACHINE CO.

LUFKIN, TEXAS

UNIVERSAL RAILS—FOR MOTORS OR GAS ENGINES

FIGURE 32

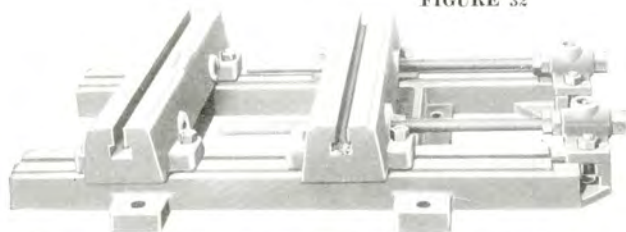

Dimensions of 32" rails shown on blue print below

FIGURE 35

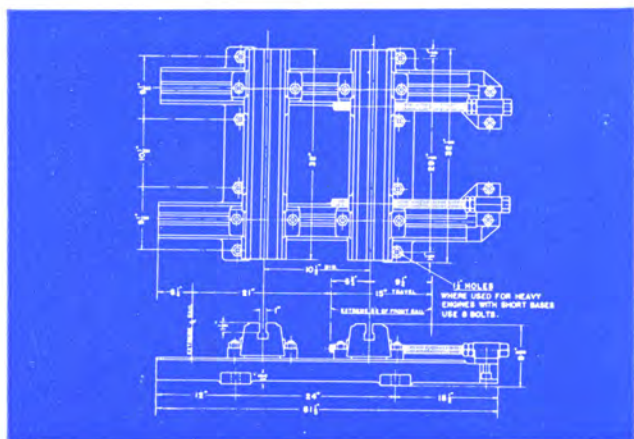


FIGURE 33

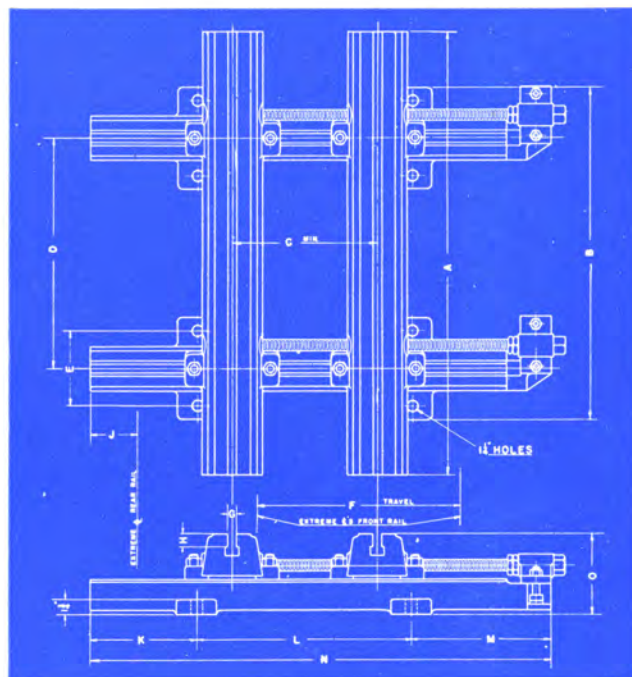


FIGURE 36

Universal rails are of heavy cast iron with machined tongue and groove fits, which with double adjusting screws assure perfect alignment. The substantial design of these rails assist in the elimination of vibration of all types of prime movers.

UNIVERSAL GAS ENGINE RAILS														
DESCRIPTION	A	B	C	D	E	F	G	H	J	K	L	M	N	O
50" ENG. RAILS	50"	37½"	10½"	26"	8½"	23½"	1"	1½"	5¼"	12"	24"	15½"	51½"	98"
69" ENG. RAILS	69"	47½"	10½"	36"	8½"	38½"	1"	1½"	5¼"	12"	36"	15½"	63½"	98"

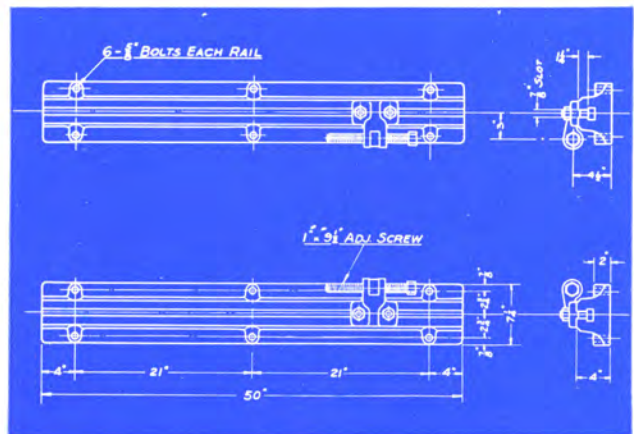


FIGURE 33A

Dimensions of 50" plain engine rail with adjusting screws for two cylinder vertical engines and small horizontal engines.

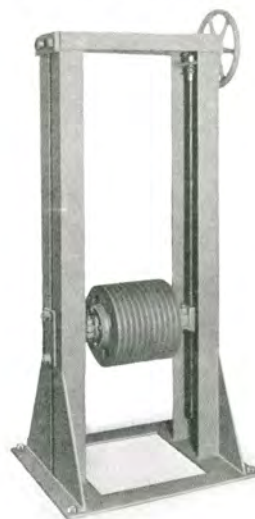


FIGURE 34

Lufkin Universal Belt Tightener is of all welded rigid construction. The sheave is raised or lowered by a hand wheel through machined miter gears to screws which turn in floating bronze nuts. The idler sheave is equipped with Timken Anti-friction bearings. One man can adjust this tightener easily and quickly by simply turning the hand wheel.


LUFKIN FOUNDRY & MACHINE CO.

LUFKIN, TEXAS

LUFKIN ARC-WELDED IMPROVED PUMP JACKS

THREE SIZES

No. 20 .....	20,000 Lb. Capacity
No. 17B .....	17,000 Lb. Capacity
No. 10B .....	10,000 Lb. Capacity

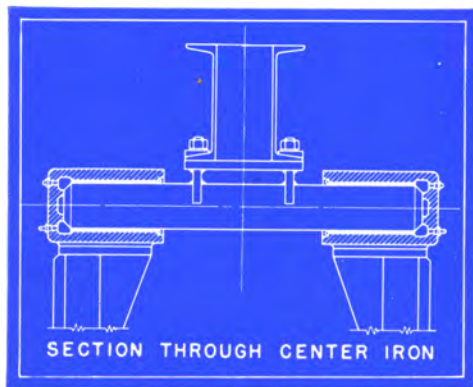

Cross Section Showing Shaft and Bronzoid Bearings Oil Seals.

FIGURE 37

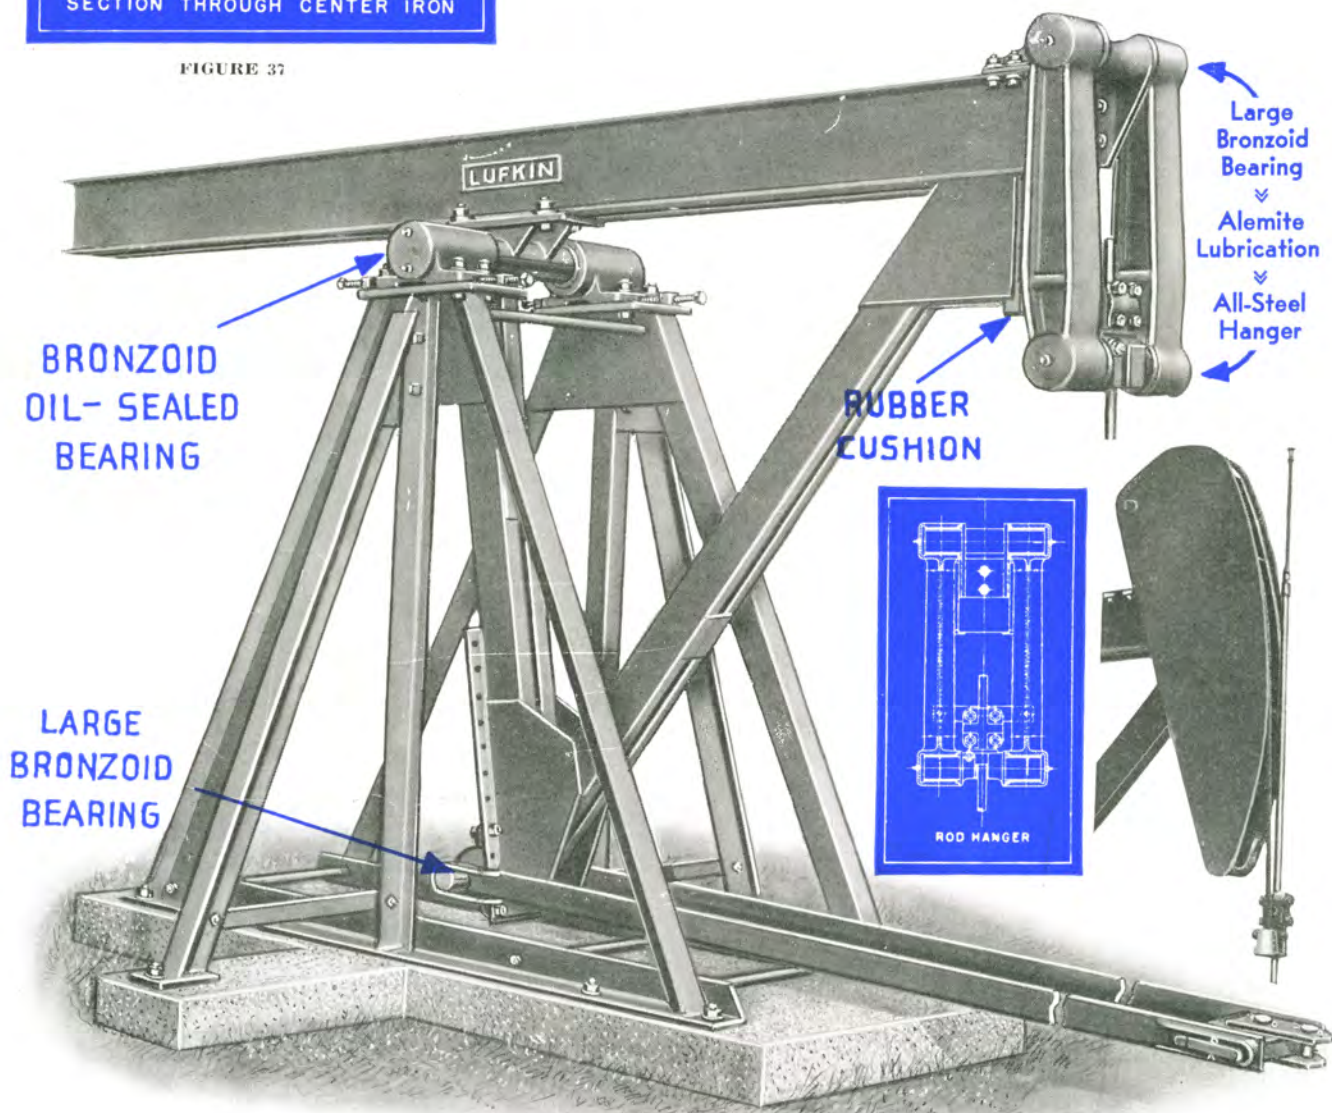


FIGURE 38

LUFKIN IMPROVED ARC-WELDED PUMP JACK

After years of experience and research Lufkin offers an improved design in jack construction that we believe will appeal to particular buyers of this class of equipment.

1. The whole structure has increased strength and rigidity.
2. Side frames and walking beams are unusually heavy and welded in jigs, with special care to secure ample welding area in all members.
3. Side frames have unusual spread and are well tied together top and bottom.
4. Pivot shafts are extra large and thoroughly welded to saddle.
5. Main bearings are oversize and Bronzoid bushed, with patented seals.
6. All-Steel hanger, that can be thrown over on top of jack; Bronzoid bushed bearings, Alemite lubricated and easily renewable.
7. Straight line action on polished rod is maintained. See diagram at right.
8. Lower adjustable beam bearings to pull rods are oversize and Bronzoid bushed with oil seals and are Alemite lubricated.
9. Foundation bolts and polished rod clamp are extra.
10. Lufkin jacks will convince and satisfy the most exacting individual looking for practical, substantial equipment with lowest maintenance cost.



LUFKIN FOUNDRY & MACHINE CO.

LUFKIN, TEXAS

LUFKIN ARC WELDED IMPROVED PUMP JACKS

ALL THREE SIZES OF LUFKIN JACKS CAN BE FURNISHED WITH HORSEHEADS THAT ARE BOLTED ON AND CAN BE READILY REMOVED WHEN CLEANING OUT WELL

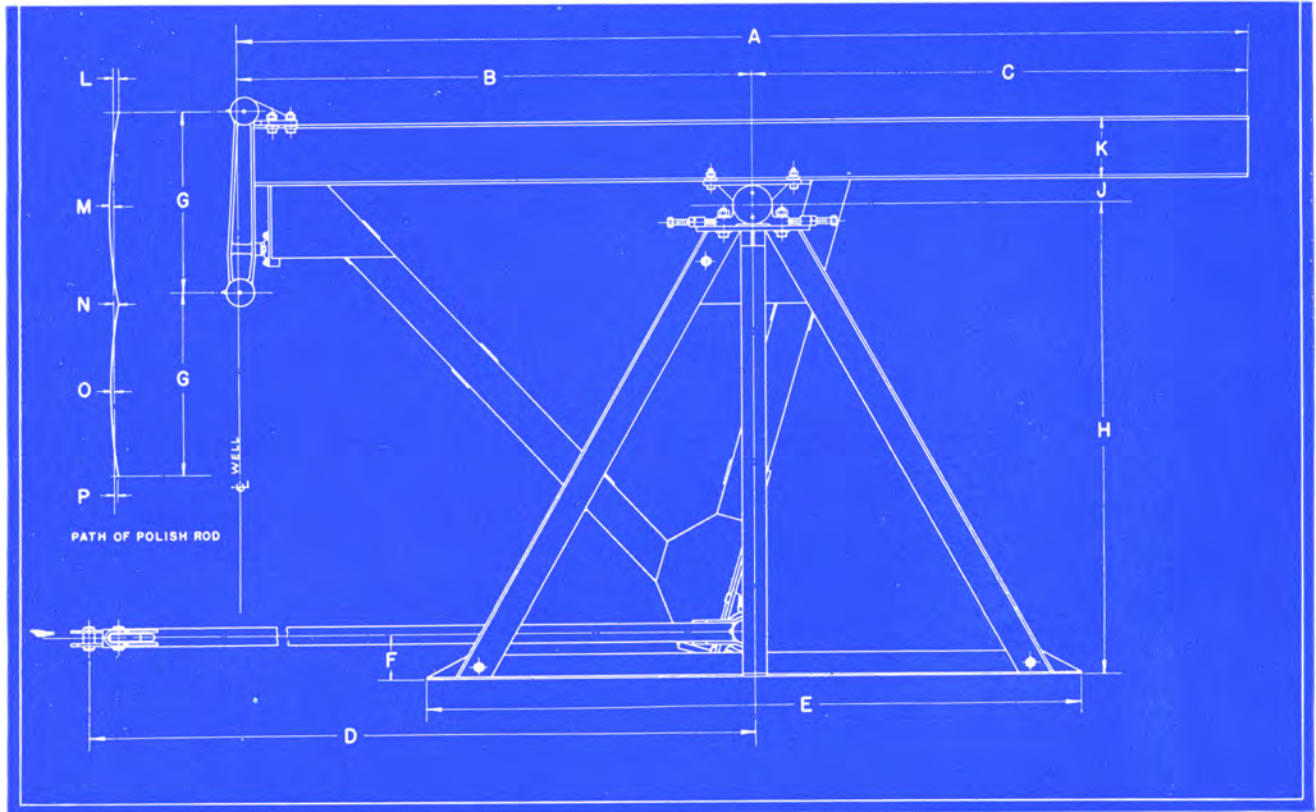


FIGURE 39


DIMENSION SHEET—LUFKIN PUMP JACKS

Jack No.	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P
10-B.....	12'-10"	6'-0"	6'-10"	10'-2½"	7'-11"	8"	2'-0"	5'-6"	3"	8"	1½"	1½"	1½"	1½"	¼"
17-B.....	13'-9½"	7'-0"	6'-9½"	12'-3¾"	8'-11"	7¾"	2'-6"	6'-6"	4"	10"	1½"	7⁄8"	5⁄8"	3⁄8"	1⁄8"
20.....	18'-0"	9'-0"	9'-0"	16'-0"	13'-0"	8"	3'-0"	7'-8"	5"	12"	1 1⁄8"	1½"	7⁄8"	1½"	½"

GENERAL SPECIFICATIONS

	No. 10-B	No. 17-B	No. 20
Rated Polish Rod Load.....	10,000 Lbs.	17,000 Lbs.	20,000 Lbs.
Stroke.....	48"	60"	72"
Maximum Ratio Polish Rod to Pull Rod Stroke.....	1.71 to 1	1.70 to 1	1.66 to 1
Minimum Ratio Polish Rod to Pull Rod Stroke.....	1.24 to 1	1.19 to 1	1.29 to 1
Depth Walking Beam.....	8"	10"	12"
Diameter and Length Saddle Bearing.....	2 15⁄16" x 10 1⁄2"	3 15⁄16" x 15"	5 7⁄16" x 18"
Bearing Surface Saddle Bearing (Bronze).....	31 Sq. In.	60 Sq. In.	97.9"
Bearing Surface on Hanger (Bronze).....	16 Sq. In.	25 Sq. In.	41.25 Sq. In.
Base to Bottom of Hanger at Mid-Stroke.....	4'-5"	5'-2 1⁄2"	6'-1 1⁄16"
Stirrup Bearing Size.....	2 15⁄16" x 8"	3 15⁄16" x 10"	4 15⁄16" x 13 1⁄4"
Number and Size Foundation Bolts.....	8-1 1⁄4" x 24"	10-1 1⁄4" x 24"	14-1 1⁄4" x 24"

LUFKIN SURFACE EQUIPMENT

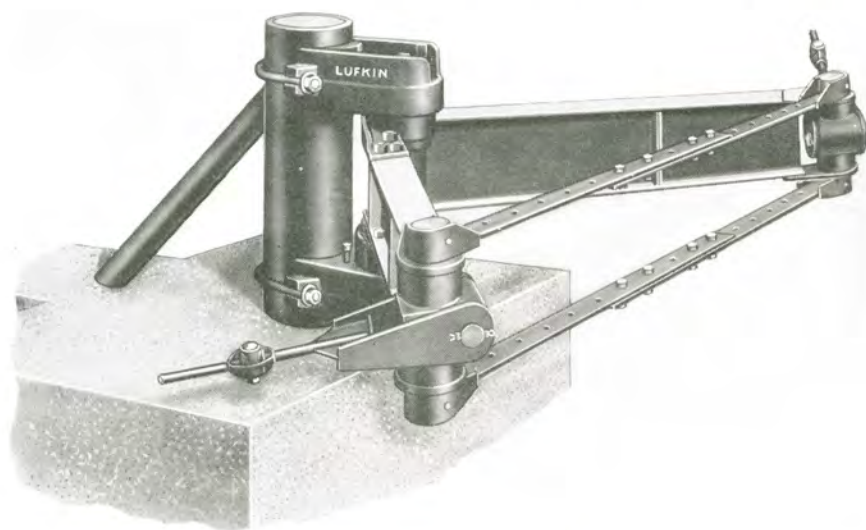

LUFKIN IMPROVED POST SWING

The bearings in the pivot shaft, which are 6½" diameter by 3" long, are bronze bushed and dust-proof with the vertical thrust running in an oil bath.

Rod line bearings are universal and are also bronze bushed and dust and oil tight. The swing is available for small or large angles.

FIGURE 40

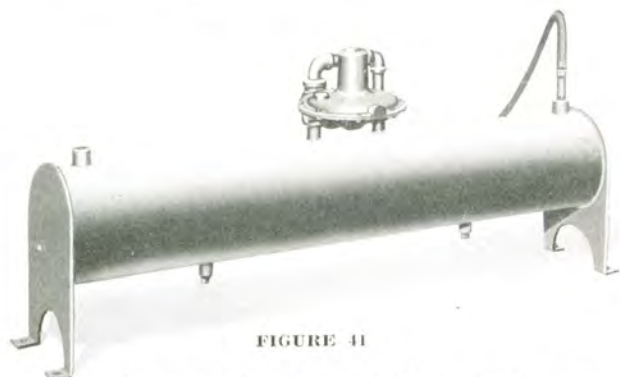


FIGURE 41

VOLUME TANK AND REGULATOR FOR GAS ENGINES

Double chamber volume tanks are usually furnished with multicylinder engines. They are carried in stock, fitted with Fisher regulators and flexible hose connection to engine as shown. The tank is 8" in diameter and 48" long with partition in center. They are well made and have ¾" pipe coupling connections. Center of tank to base is 10". The tank may also be used as a scrubber.



LUFKIN STROKE OR MULTIPLIER POST

This type post is commonly used when change in stroke is desired near unit. Take-off bearings on this post are bronze bushed, universal type. The lower bearings are interchangeable with Lufkin hold-up and hold-down.

FIGURE 42

LUFKIN KNOCK-OUT POST

Lufkin knock-out posts are especially handy. Lifting weight lever knocks the well off; lifting double connection under hook (which is the extension from a twin crank unit in this case) automatically puts the well in operation. The same knock-out is used on central power and back-crank jobs. The knockout bar notches are on the upper edge allowing a smooth lower surface to ride on a renewable end grain wood block inserted in cast iron shoe and spreader plate.

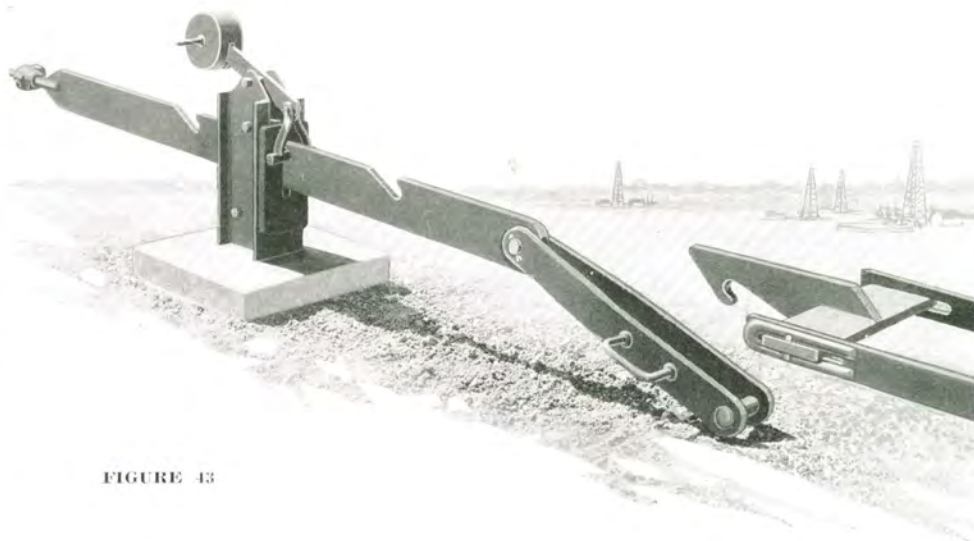


FIGURE 43

LUFKIN FOUNDRY & MACHINE CO.

LUFKIN, TEXAS

LUFKIN POWERS

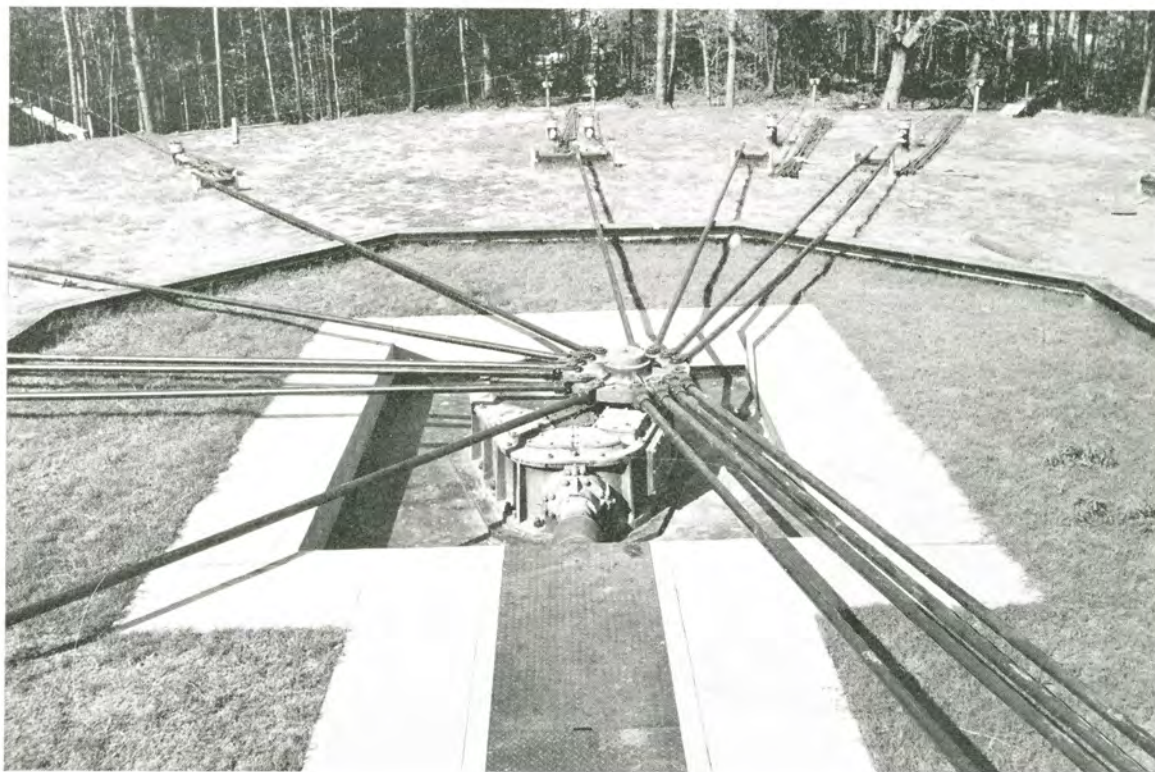


FIGURE 44

*Typical Lufkin Central Power Installation.*

The first modern geared central power ever installed was manufactured by Lufkin. A line of powers are available in horsepower ranging from 40 to 150 in either helical or worm gear types.

For details, write for our special central power bulletin.

*Cross Section  
Streamlined Power*

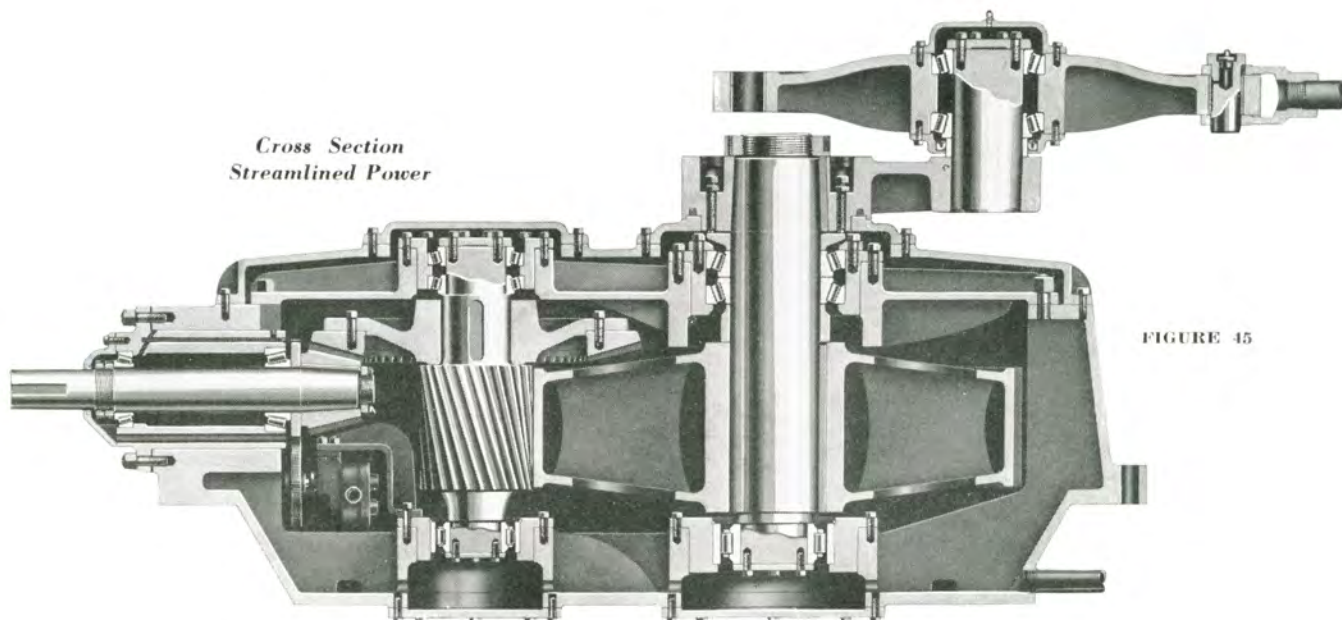


FIGURE 45


**LUFKALOY**

**Controlled Specification Iron Castings**

LUFKALOY Castings are produced in our own modern Foundry which has a capacity of sixty tons daily. Castings are manufactured in all sizes up to nine tons each. Special castings have been made up to fifteen tons.




**MARINE ENGINE LINER**  
42" Dia. x 84" high, Wt. 6000 lbs.  
Specification No. 11-E

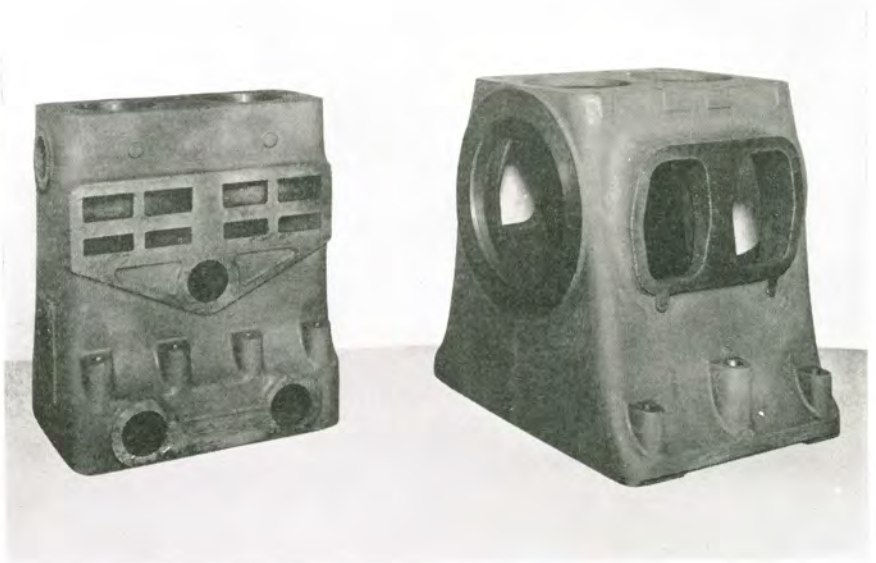


*Two Cylinder Engine. Block and Base.  
Specification 11-E and 111-E*



*Heat Resisting Iron Gas Burner Casting*

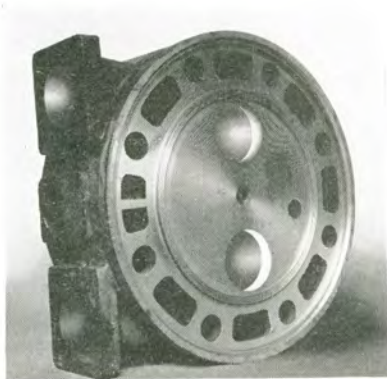


*Cylinder Head. Specification 11-E*

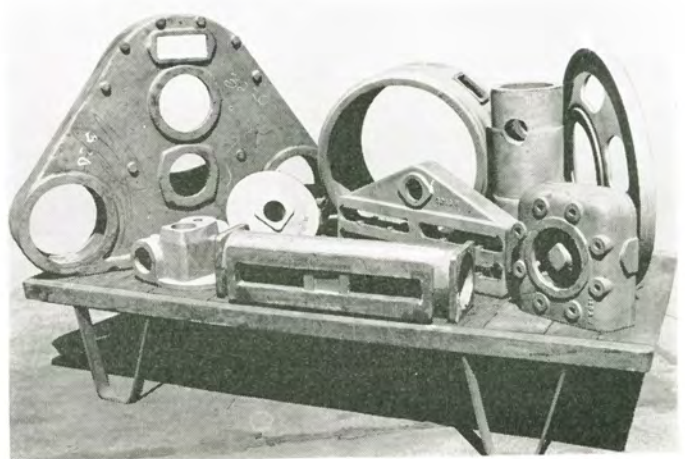


*Various Engine Castings include Piston, Head, Manifold, etc.*

LUFKIN FOUNDRY & MACHINE CO.

LUFKIN, TEXAS

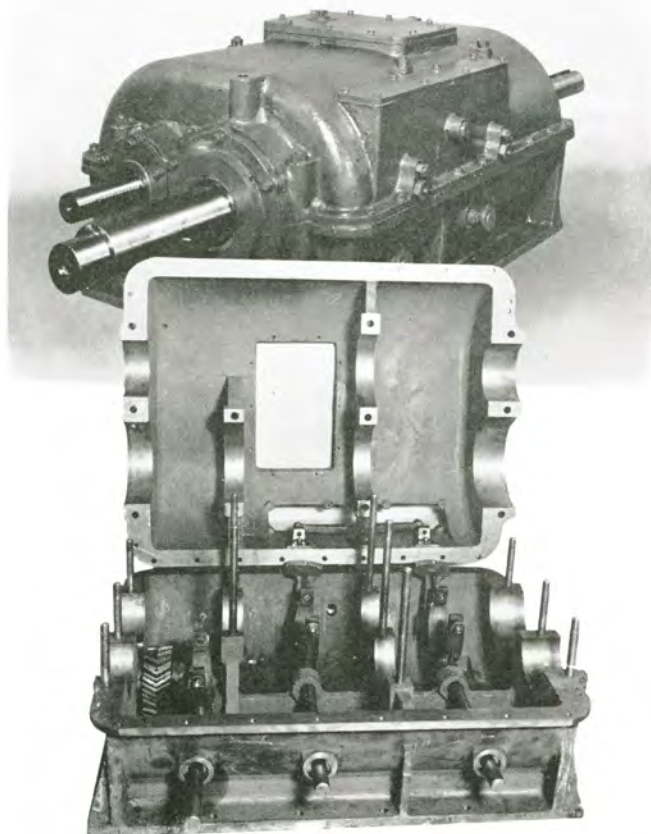

Left. Herringbone Transmission for Rotary Drilling Rig.

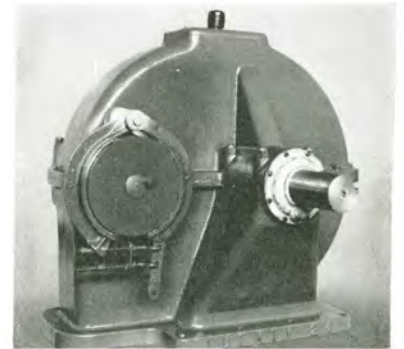

Right. Herringbone Gear Unit for Oil Well Pumping.



Right. Typical Order for River Clamps.

LUFKALOY Iron fundamentally is an alloy of iron and carbon having a basic structure similar to that of carbon tool steel with the exception of excess carbon which is distributed as microscopically fine graphite. LUFKALOY iron is a controlled specification iron having a thoroughly homogeneous structure, uniform density, and definite physical properties.

COMPARISON OF PHYSICAL PROPERTIES OF CAST FERROUS ENGINEERING MATERIALS


Physical Properties <sup>1</sup>	LUFKALOY METAL Controlled Specification IRONS						Ordinary Gray Cast Iron	Fully Annealed Malleable Iron <sup>7</sup>	Plain Low Carbon Cast Steel <sup>8</sup>	Mild Steel Forgings <sup>9</sup>
	Number I-E4	Number I-E	Number II-E	Number III-E	Number IV-E	Number V-E				
<sup>2</sup> Tensile Strength as Cast.....	60,000	50,000	45,000	40,000	35,000	30,000	25,000	55,000	60,000	80,000
<sup>2</sup> Yield Point—0.2% Set.....	47,500	45,000	42,500					37,500	30,000	40,000
<sup>2</sup> Tensile Strength—Heat Treated.....	78,000	75,000	65,000							
<sup>2</sup> Tensile Strength at 1000° F.....	50,000	45,000					17,000	35,000	27,000	40,000
<sup>2</sup> Modulus of Elasticity in Tension @ ¼ Breaking Load.....	25,000,000	21,000,000					11,000,000	25,000,000	29,000,000	30,000,000
<sup>2</sup> Modulus of Elasticity in Tension H. T. @ ¼ Breaking Load.....	26,000,000	24,000,000								
<sup>3</sup> Transverse Strength 1.20 dia. x 18" centers.	3,500 min.	3,300 min.	3,000 min.	2,800 min.	2,500 min.	2,200 min.	2,000			
Deflection in inches.....	.35 min.	.33 min.	.27 min.	.25 min.	.22 min.	.18 min.	.15-22	6		
<sup>2</sup> Modulus of Rupture—Round Bar.....	100,000 min.	90,000 min.	80,000 min.	70,000 min.	65,000 min.	55,000 min.				
<sup>2</sup> Ultimate Shearing Strength. Single Shear. Lbs., per Sq. In.....	60,000 min.	50,000 min.	45,000 min.	40,000 min.	4	4	5	48,000	33,000	44,000
<sup>2</sup> Compressive Strength as Cast.....	185,000	175,000	165,000				100,000	60,000	90,000	120,000
<sup>2</sup> Endurance Limit.....	25,000	22,000	20,000				9,000	25,000	28,000	33,000
B. H. N. Sand Cast 1.20" dia. Bar.....	228-255	220-250	210-240	200-230	190-220	180-210	150-190	110-145	160-175	160-175

<sup>1</sup> All Physical Properties for LUFKALOY METAL are based on A.S.T.M. "B" Transverse Test Bars. <sup>2</sup> Values are in pounds per square inch. <sup>3</sup> Values are in pounds. <sup>4</sup> Undetermined. <sup>5</sup> Has been reported from 1.15 to 2.03 times tensile strength. <sup>6</sup> Poissons ratio—0.17. <sup>7</sup> A.S.T.M. Spec. A-4733, Grade 35018. <sup>8</sup> A.S.T.M. A-27-24, Class B, Soft. <sup>9</sup> A.S.T.M. Spec. A-20-27.

# LUFKIN FOUNDRY & MACHINE CO.


# LUFKIN, TEXAS

## LUFKIN PIPE, POLE, FLOAT AND VAN TRAILERS

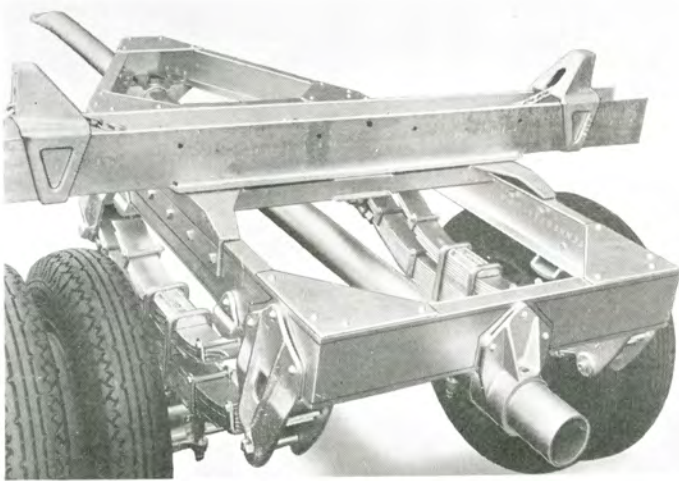

Lufkin Pipe and Pole Trailers are designed especially for hauling pipe, steel beams, lumber, logs, piling, and other self-supporting materials.

This trailer is of all steel, electric welded and riveted construction, featuring slip-spring suspension and radius rod.

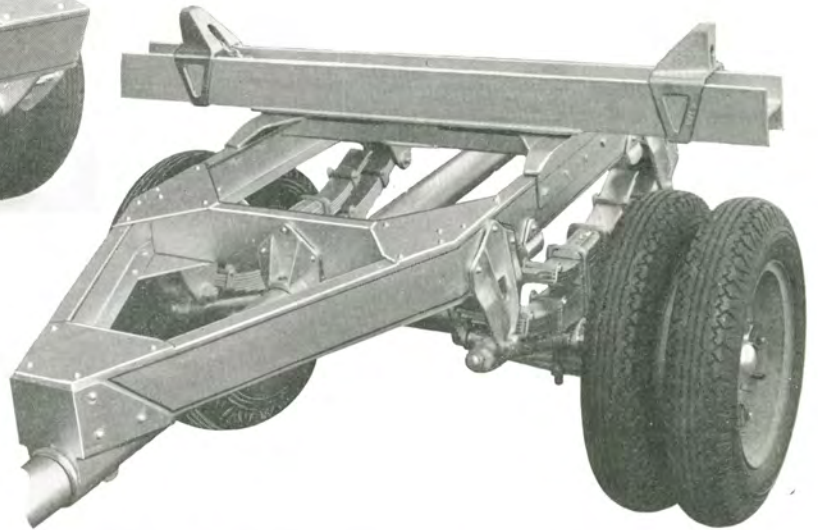

Equipment includes draw bar and fifth wheel with king pin of suitable size, adjustable chain block or stake socket optional at no increase in price. Electric or vacuum brakes can be furnished if desired.




**LUFKIN ALL STEEL VANS** are modern in design and construction and are made to any special standards as to size or finish. Modern streamlining adds to the beauty of this freight liner and to the prestige of the owner. Ask for our Special Van Bulletin No. 105.

# LUFKIN FOUNDRY & MACHINE CO.

# LUFKIN, TEXAS

## PIPE, POLE, FLOAT AND VAN TRAILERS

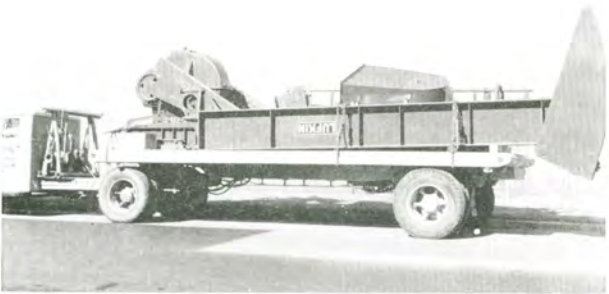

### THE LUFKIN FLOAT—CENTER FRAME TYPE—MODERN—STREAMLINED


In the design and construction of Lufkin Trailer equipment the same high standards of engineering and manufacturing which have distinguished Lufkin equipment in the oil fields of the world have been used throughout in Lufkin's Trailer Division.

The outstanding features incorporated in the Lufkin Trailer design, aside from streamlining, etc., are:

1. Free end springs which carry the load.
2. Radius Rods which pull the load.
3. Perfect axle alignment maintained by the use of adjustable radius rods.
4. Refinements in support legs, fifth wheel and extra tire carrier.


*Side Illustrations: Typical Lufkin center frame floats in use by some of the largest operators in Texas.*

*Lower: Lufkin Float particularly adaptable to oil field haulage.*

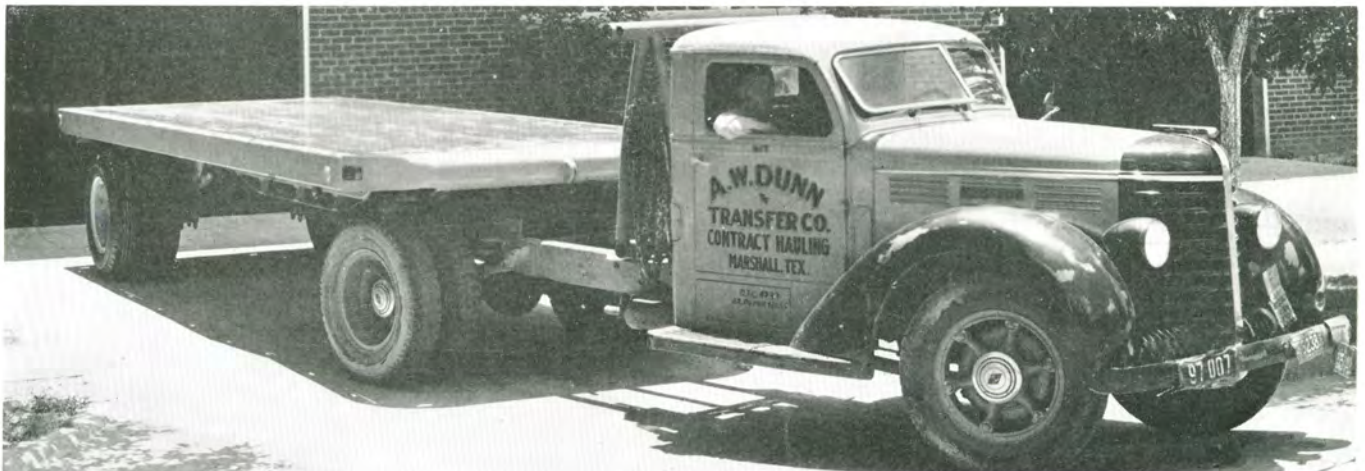

# LUFKIN FOUNDRY & MACHINE CO.

# LUFKIN, TEXAS

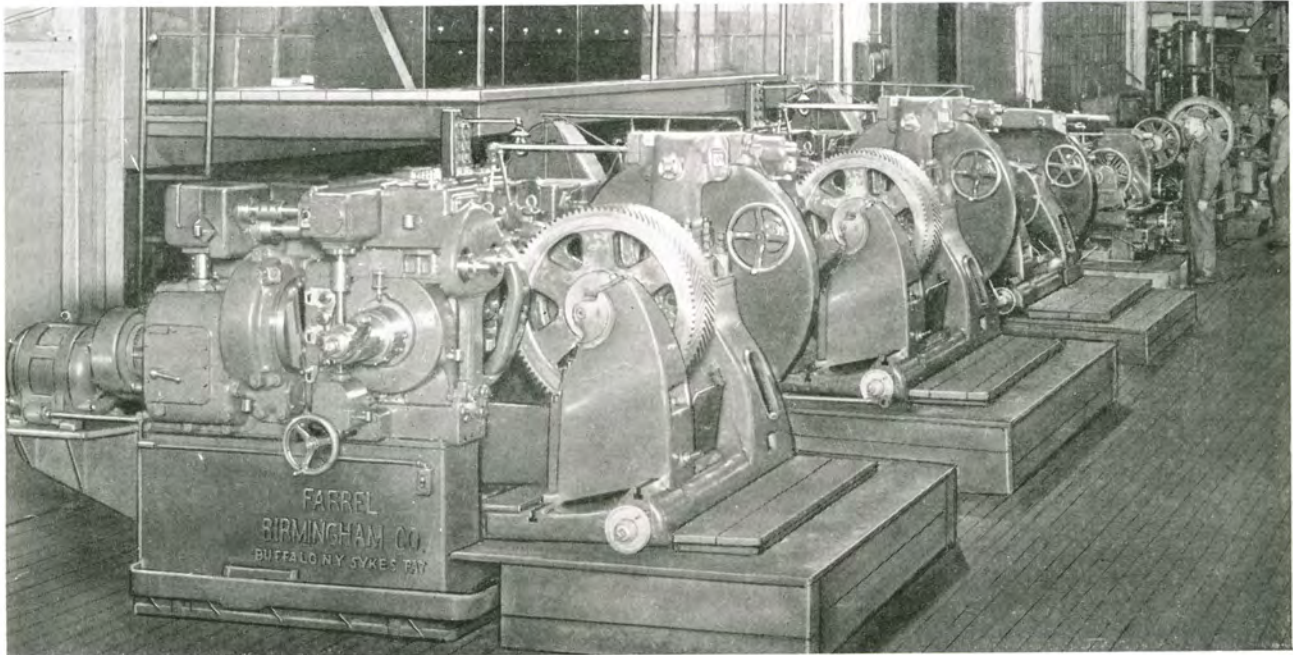

*Gear Cutting Department of our Lufkin Plant.*



*Testing pinion shaft blank for eccentricity before cutting herringbone teeth. Accuracy here is of extreme importance.*



*Teeth of herringbone gears must pass rigid inspection for accuracy of formation.*

Every major part going into a Lufkin unit, except anti-friction bearings, are manufactured and assembled in our Lufkin plant. Our inspection department has complete control over every operation. We are in a position to accept complete responsibility for the manufacture of each Lufkin unit.




*Testing gear teeth for hardness.*




# LUFKIN FOUNDRY & MACHINE CO.

# LUFKIN, TEXAS


## MODERN TOOLS MEAN PRECISION EQUIPMENT

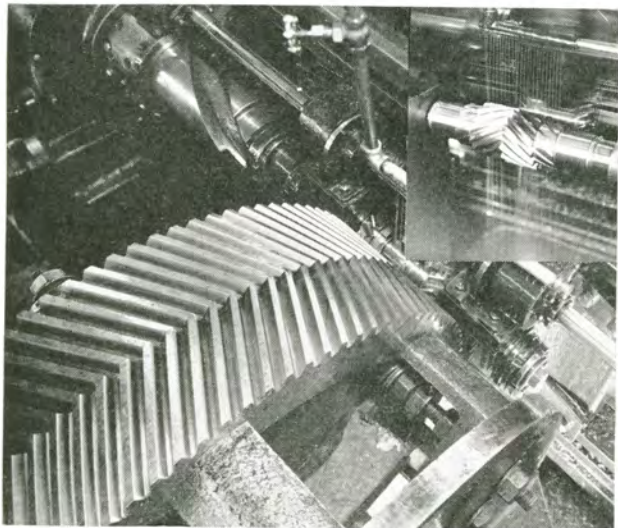


All herringbone gears are generated on Sykes Patented gear generators in our own plant and under the most rigid inspection system. Photos show cutters in action generating gear and pinion.

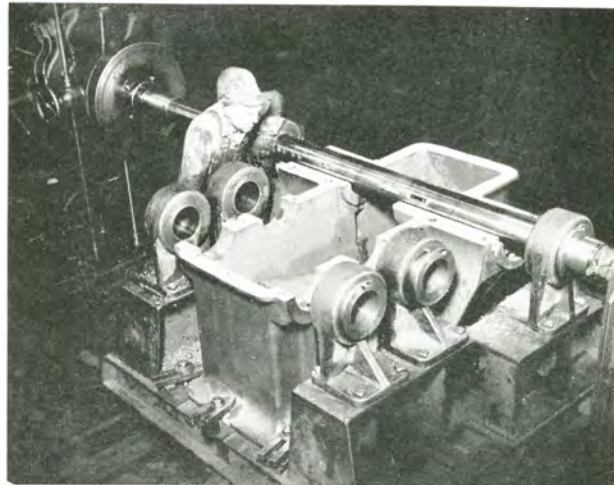


Without doubt the most expensive and the most accurate bar yet built for precision boring of parallel bearings. This photo shows cover removed, revealing entire operation of bar.

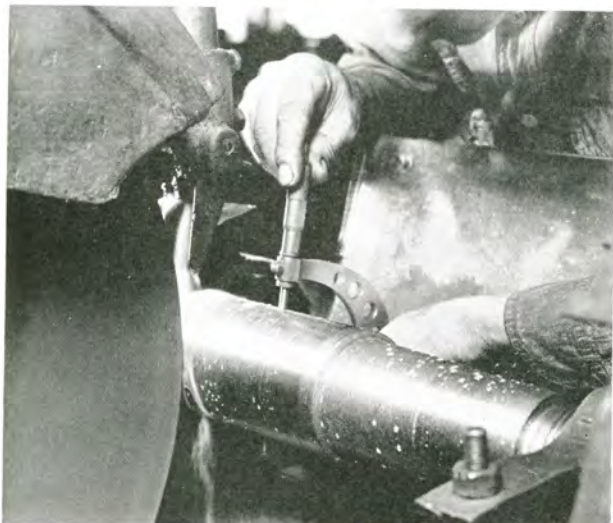


Grinding for accuracy. All shafts, pinions, crank pins, etc., are ground to absolute micrometer size.

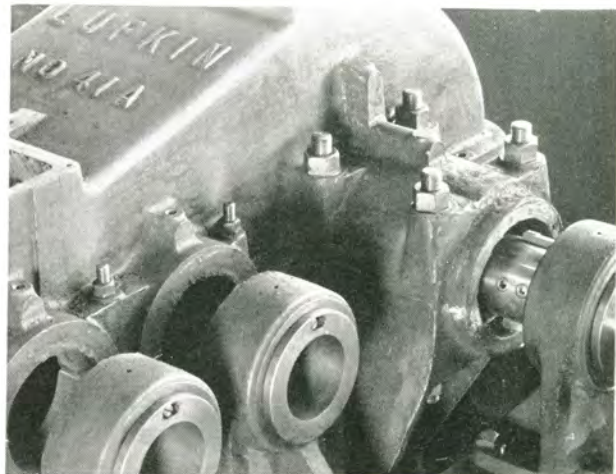

This photo shows start of boring operation with cover intact. Every Lufkin Unit is bored to absolute accuracy on Equipment such as is described above.

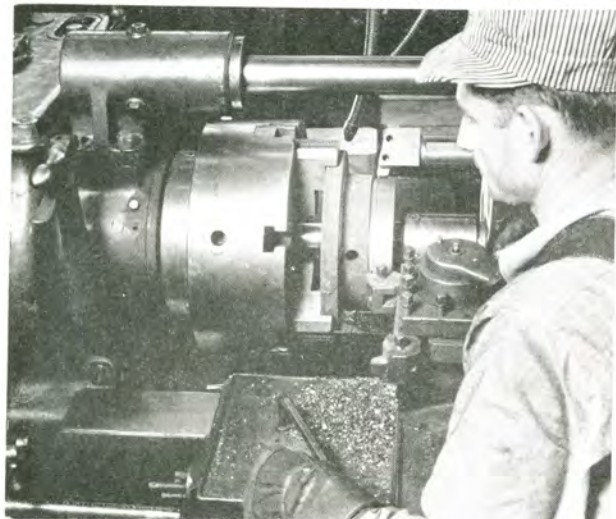



The most modern type of turret lathe—one of a battery performing similar operations. Note that boring, facing and turning rough and finish cuts are completed in one operation.

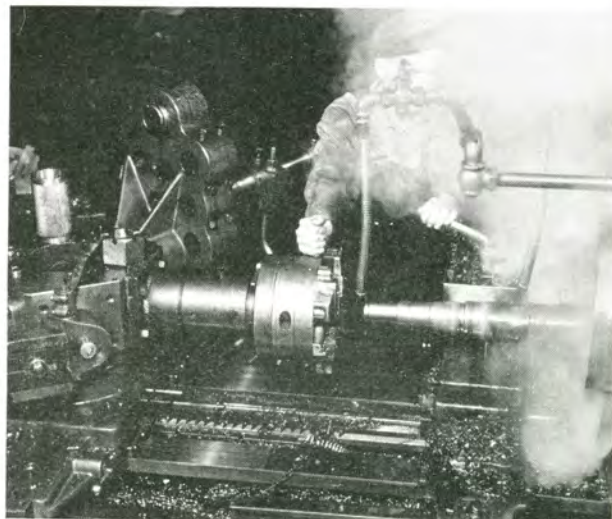

Turning and threading Lufkin Crank Pins from heat-treated alloy steel on one of the most modern types of turret lathes.


# LUFKIN MACHINE & FOUNDRY CO.

# LUFKIN, TEXAS

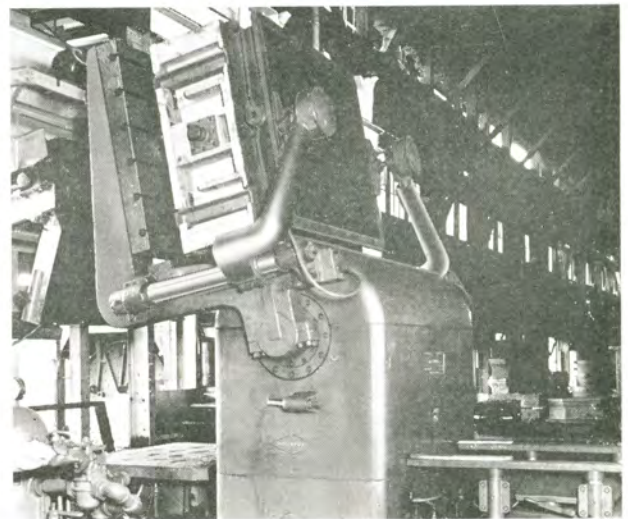
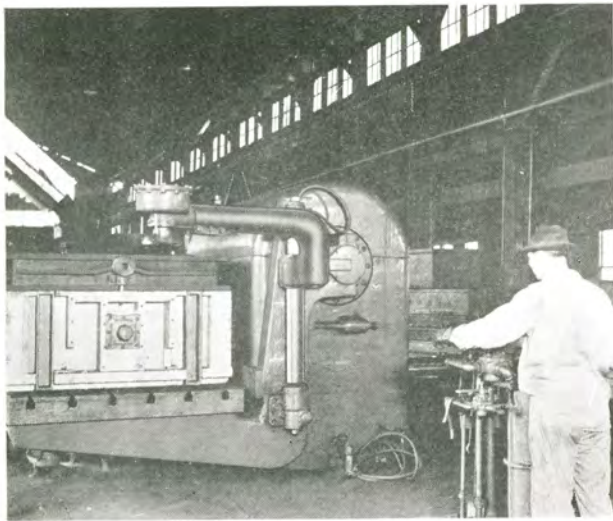


## LARGEST MOULDING MACHINES IN SOUTHWEST

The above cut shows one of our moulding machines in operation. Our foundry is thoroughly modern with the newest machinery to insure the best quality of castings possible. All Lufkin iron castings are "Lufkaloy" alloy iron, exhibiting uniform density and solidity of grain structure throughout all metal sections regardless of their thickness. It possesses definite physical properties fully double those of unalloyed irons.

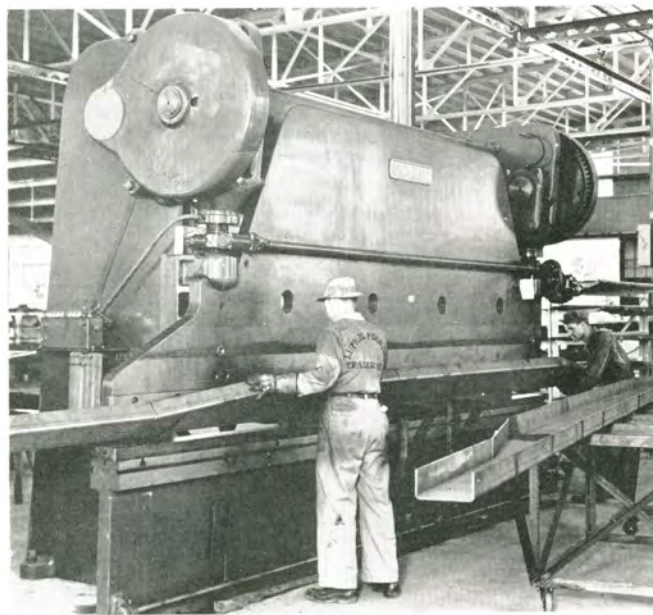

Modern tools have been installed in the new Trailer Plant of the Lufkin Foundry & Machine Company. Center left: Cincinnati Brake on which all parts are formed—this is said to be the largest tool of its kind in the Southwest. Lower left: All parts are formed to jig and template—this jig forms the van "nose" during "spot-welding" process. Lower right: Cincinnati Shear—for heavy duty shearing of plates, sheets, etc.

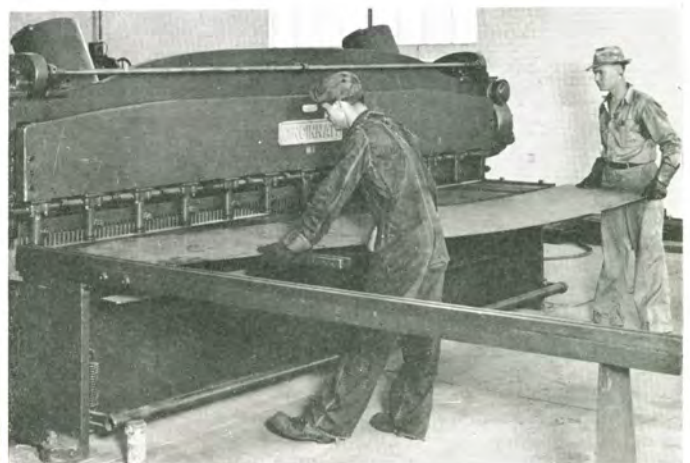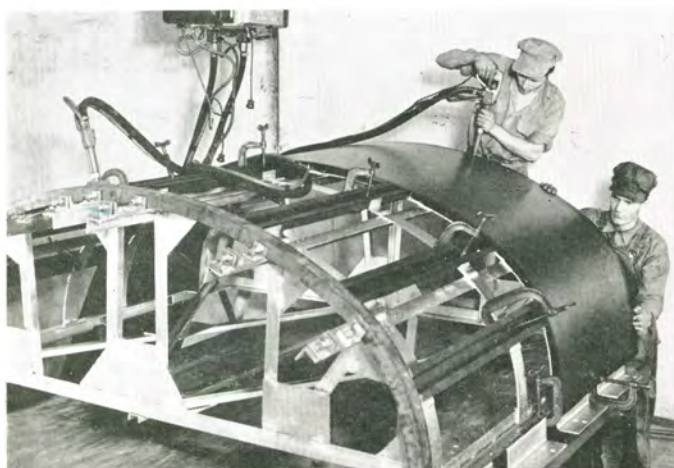



# LUFKIN

EQUIPMENT OF ADVANCED DESIGN

