

LUFKIN

PUMPING UNITS



LUFKIN

INDUSTRIES, INC.
LUFKIN, TEXAS

LUFKIN EQUIPMENT OF ADVANCED DESIGN

1. Oil Field Pumping Units:

- A. Air Balanced Pumping Units—Pages 23-25.
- B. Beam Balanced Pumping Units—Page 6.
- C. Crank Balanced Pumping Units—Pages 7-15.
- D. Mark II Unitorque Pumping Units—Pages 16-21.

2. Geared Speed Reducers and Increases—Page 27.

*Factory and Executive Offices P.O. Box 849, LUFKIN, TEXAS 75901 Phone: 713-634-2211
Oilfield Sales and Service—Offices and Warehouses of Lufkin Industries Inc.*

OIL FIELD SALES AND SERVICES

ATLANTA AREA
Stone Mountain, Georgia 30083
5190 Antelope Lane
Phone: 404/939-3119

HOUSTON, TEXAS 77036
Suite 152
6610 Harwin Drive
Phone: 713/781-6850

BAKERSFIELD, CALIFORNIA 93302
2500 Parker Lane
P. O. Box 444
Phone: 805/327-3563

KILGORE, TEXAS 75662
P. O. Box 871
Phone: 214/984-3875

BALTIMORE, MARYLAND AREA
P. O. Box 673
Bel Air, Md. 21014
Phone: 301/879-9264

LOS ANGELES AREA
P. O. Box 8522
10221 Slater Ave. Suite 222
Fountain Valley, Calif. 92708
Phone: 714/963-0859

**CALGARY 45, ALBERTA,
CANADA T3A 0G3**
5112 Varscliffe Road, N.W.
Phone: 403/288-3073

NEW ORLEANS AREA
P. O. Box 73373
Metairie, Louisiana 70033
Phone: 504/885-2841

CASPER, WYOMING 82601
100 Warehouse Road
P. O. Box 1849
Phone: 307/234-5346

ODESSA, TEXAS 79760
East Hwy. 80
P. O. Box 1632
Phone: 915/563-0363

CHICAGO AREA
Crystal Lake, Illinois 60014
P. O. Box 382
Phone: 815/459-4033

**OKLAHOMA CITY,
OKLAHOMA 73109**
P. O. Box 95205
2300 S. Prospect
Phone: 405/677-0567

CLEVELAND, OHIO 44130
Suite 215—6500 Pearl Road
Phone: 216/842-7880
216/842-7881

**PITTSBURGH,
PENNSYLVANIA 15235**
201 Penn Center Blvd.
Suite 101
Phone: 412/241-5131
412/241-5133

DALLAS, TEXAS 75206
271 Meadows Bldg.
Phone: 214/691-6133

SEATTLE, WASHINGTON 98125
10703 Durland Ave. N.E.
Phone: 206/362-7373

DENVER, COLORADO 80295
1138 Lincoln Tower Building
Phone: 303/861-1188
303/861-1189

**EDMONTON, ALBERTA,
CANADA T6E 0K9**
9950 - 65th Avenue
Phone: 403/435-8571
403/435-8572

TULSA, OKLAHOMA 74105
3025 East Skelly Drive
Suite 446
Phone: 918/749-6846

INTERNATIONAL DIVISION

HOUSTON, TEXAS 77036
EXPORT DIVISION OFFICE
Suite 152
6610 Harwin Drive
Phone: 713/781-0600
Telex: 76-2678
Cable: LUFFO, Houston

BUENOS AIRES, ARGENTINA 1035
Esmeraldo 155-Piso 7°
Phone: 743-1929

LONDON, W. 1, ENGLAND
Suite 14 Newton House
118/119 Piccadilly
Phone: 01-493-3983
Telex: 23781
Cable: LUFKINDUS London W.1

MARACAIBO, VENEZUELA, S.A.
Apartado 1144
Phone: 061-223966
Telex: 61140
Cable: SAVENMEX

NEW YORK CITY AREA
100 Menlo Park Office
Building
Room 408
Edison, New Jersey 08817
Phone: 201/549-1023
Telex: 710-998-0559

2037

LUFKIN SUCKER ROD PUMPING UNITS ARE AVAILABLE TO HANDLE ALL INSTALLATION PROBLEMS AND DOWN HOLE CONDITIONS.



MARK II UNITORQUE UNITS

The Mark II unit, due to its unique geometry and phased counterbalance feature, lowers peak torque and horsepower requirements in many instances when properly applied. The unusual geometry of the Mark II produces a somewhat slower up stroke and faster down stroke with reduced acceleration where the load is greatest, resulting in lower peak loads and longer rod life.



CONVENTIONAL UNITS

The LUFKIN Conventional Crank Balanced Unit, most widely known and accepted, is the old reliable "WORK HORSE" of the oil patch. This is the most universally adaptable unit in the "LUFKIN LINE," simple to operate and requires minimum maintenance. For all around pumping situations where dependability, ruggedness, and simplicity are prime considerations, the Conventional Unit has always been first choice.

COMPACT TYPE AIR BALANCED UNITS FOR OFFSHORE PLATFORMS

Lufkin has taken advantage of the inherent compactness and light weight of the Air Balanced unit, reducing the height, width, and length to an absolute minimum. This makes this unit particularly desirable for offshore platforms where space is of greatest importance. Since all loads are approximately in the vertical plane, the destructive horizontal dynamic forces set up by rotating crank counterweights on conventional units are eliminated.



COMPUTER SERVICE IS AVAILABLE TO AID IN SIZING PUMPING UNITS, SUCKER RODS, AND PUMPS TO INSURE MAXIMUM PRODUCTION AND OPTIMUM UTILIZATION OF EQUIPMENT.



AIR BALANCED UNITS

The utilization of compressed air instead of heavy cast iron counterweights allows more accurate fingertip control of counterbalance. As a result, the weight of the unit is greatly reduced, significantly lowering transportation and installation costs. Air Balanced units have a distinct advantage in the larger sizes with long strokes, where cast iron counterweights on conventional crank counterbalanced units must be so massive that their use is practically prohibitive.

For large volume production from any depth Lufkin has developed the Hi-V Series of Air Balanced units with peak torque ratings up to 3,648,000 inch pounds, and stroke lengths up to 300 inches.

DOUBLE REDUCTION GEAR UNITS

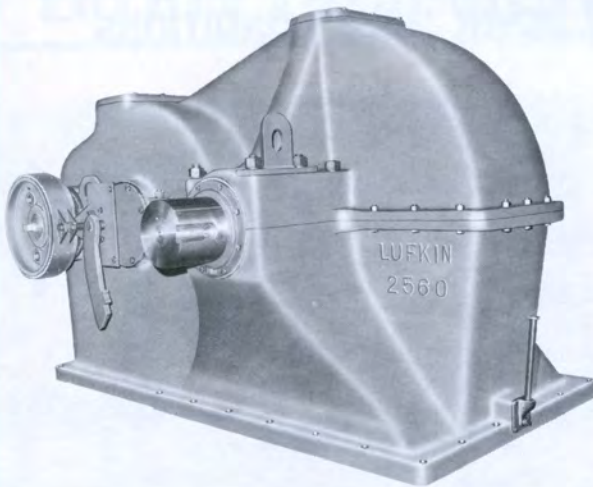


FIGURE 1
2560D Double Reduction Gear Unit

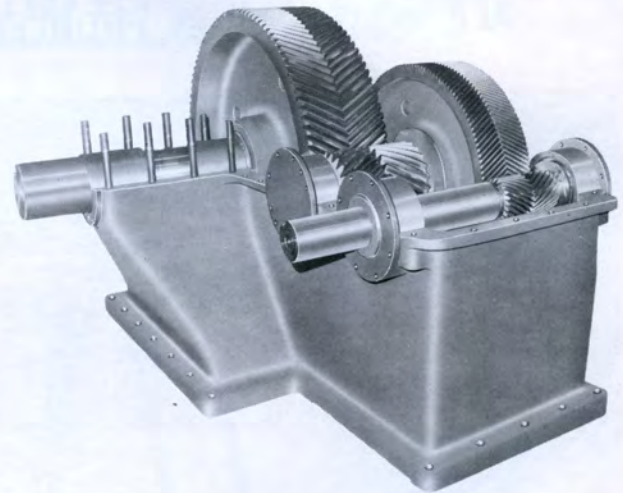


FIGURE 2
2560D Double Reduction Gear Unit, cover removed

1. Housing especially built for oil well service, of rugged construction with large factors of safety.
2. Precision cut Lufkin herringbone gears are used exclusively in all Lufkin pumping units.
3. Gear Cases are jig bored to same accuracy as gears.
4. All shafts forged from alloy steel, heat treated and precision ground.
5. Oversize Bearings on crankshafts. Easily renewable but seldom requiring replacement.
6. All pinions float on Straight Roller Bearings.
7. No Oil Pumps. Lufkin gears operate in oil bath with gear wipers to flood bearings.

**GEAR SPECIFICATIONS
DOUBLE REDUCTION**

3648D GEAR REDUCER:

RATING: 3,648,000 In. Lbs. Peak Torque
RATIO OF GEARS: 35.1
CRANKSHAFT DIA.: 13"
SHEAVE: 80" P.D.—18D Std.
6 1/2" Bore
GEAR BOX OIL CAPACITY: 360 Gallons

2560D GEAR REDUCER:

RATING: 2,560,000 In. Lbs. Peak Torque
RATIO OF GEARS: 34.53
CRANKSHAFT DIA.: 11 3/4"
SHEAVE: 80" P.D.—16D Std.
6 1/2" Bore
GEAR BOX OIL CAPACITY: 235 Gallons

1824D GEAR REDUCER:

RATING: 1,824,000 In. Lbs. Peak Torque
RATIO OF GEARS: 28.33
CRANKSHAFT DIA.: 9"
SHEAVE: 46" P.D.—11D Std.,
68" P.D. Max., 4-15/16" Bore
GEAR BOX OIL CAPACITY: 165 Gallons

1280D GEAR REDUCER:

RATING: 1,280,000 In. Lbs. Peak Torque
RATIO OF GEARS: 28.05
CRANKSHAFT DIA.: 8 1/2" (Mark II, 10 1/2")
SHEAVE: 46" P.D.—10D Std.,
68" P.D. 10D Max., 4-15/16" Bore
GEAR BOX OIL CAPACITY: 120 Gallons

912D GEAR REDUCER:

RATING: 912,000 In. Lbs. Peak Torque
RATIO OF GEARS: 28.72
CRANK SHAFT DIA.: 7" (Mark II, 9")
SHEAVE: 47.6" P.D.—8D Standard
55.2" P.D. 10C Max., 4-3/16" Bore
GEAR BOX OIL CAPACITY: 107 Gallons

640D GEAR REDUCER:

RATING: 640,000 In. Lbs. Peak Torque
RATIO OF GEARS: 28.6
CRANKSHAFT DIA.: 7" (Mark II, 9")
SHEAVE: 34" P.D.—6D or 8C Std., 47.4" or
51.4" P.D. Alt., 55.4" P.D. Max.,
3-7/16" Bore
GEAR BOX OIL CAPACITY: 70 Gallons

456D GEAR REDUCER:

RATING: 456,000 In. Lbs. Peak Torque
RATIO OF GEARS: 29.04
CRANKSHAFT DIA.: 7" (Mark II, 9")
SHEAVE: 34" P.D.—6D or 8C Std.,
47.4" P.D. Alt., 51.4" P.D. Max.,
3-7/16" Bore
GEAR BOX OIL CAPACITY: 55 Gallons

320D GEAR REDUCER:

RATING: 320,000 In. Lbs. Peak Torque
RATIO OF GEARS: 30.12
CRANKSHAFT DIA.: 6-7/16" (Mark II, 8 1/2")
SHEAVE: 24.6 P.D.—6C or 5D Std.,
29.6" P.D. Alt., 47" P.D. Max.,
2-15/16" Bore
GEAR BOX OIL CAPACITY: 50 Gallons

228D GEAR REDUCER:

RATING: 228,000 In. Lbs. Peak Torque
RATIO OF GEARS: 28.45
CRANKSHAFT DIA.: 6" (Mark II, 7")
SHEAVE: 24.6" P.D.—5C or 4D Std.,
29.6" P.D. Alt., 41" P.D. Max.,
2-7/16" Bore
GEAR BOX OIL CAPACITY: 34 Gallons

160D GEAR REDUCER:

RATING: 160,000 In. Lbs. Peak Torque
RATIO OF GEARS: 28.67
CRANKSHAFT DIA.: 5-7/16" (Mark II, 7")
SHEAVE: 24.6" P.D.—4C or 3D Std.,
29.6" P.D. Alt., 38" P.D. Max.,
2-3/16" Bore
GEAR BOX OIL CAPACITY: 22 Gallons

114D GEAR REDUCER:

RATING: 114,000 In. Lbs. Peak Torque
RATIO OF GEARS: 29.4
CRANKSHAFT DIA.: 4-7/16" (Mark II,
6-7/16")
SHEAVE: 19.6" P.D.—3C Std., 24.6" or
29.6" P.D. Alt., 33.6" P.D. Max.,
1-15/16" Bore
GEAR BOX OIL CAPACITY: 17 Gallons

57D GEAR REDUCER:

RATING: 57,000 In. Lbs. Peak Torque
RATIO OF GEARS: 29.32
CRANKSHAFT DIA.: 4"
SHEAVE: 19.6" P.D.—2C Std., 24.6" P.D. Alt.,
27.5" P.D. Max., 1-15/16" Bore
GEAR BOX OIL CAPACITY: 13 Gallons

40D GEAR REDUCER:

RATING: 40,000 In. Lbs. Peak Torque
RATIO OF GEARS: 29.2
CRANKSHAFT DIA.: 4"
SHEAVE: 21" P.D.—2C or 3B Std.,
23.3" P.D. Max., 1-11/16" Bore
GEAR BOX OIL CAPACITY: 7 Gallons

25D GEAR REDUCER:

RATING: 25,000 In. Lbs. Peak Torque
RATIO OF GEARS: 28.9
CRANKSHAFT DIA.: 3"
SHEAVE: 18" P.D.—2B or 3A Std.,
18" P.D. Max., 1 1/8" Bore
GEAR BOX OIL CAPACITY: 5 Gallons


16D GEAR REDUCER

RATING: 16,000 In. Lbs. Peak Torque
RATIO OF GEARS: 35.7
CRANKSHAFT DIA.: 2 1/2"
SHEAVE: 15.3" P.D.—3A or 2B or 1C, 1.180" Bore
GEAR BOX OIL CAPACITY: 5 Gallons

EXPLANATION OF PUMPING UNIT DESIGNATIONS

C - 228D-246-86

- Type Pumping Unit:
 A—Air Balanced
 B—Beam Balanced
 C—Conventional
 M—Mark II Unitorque

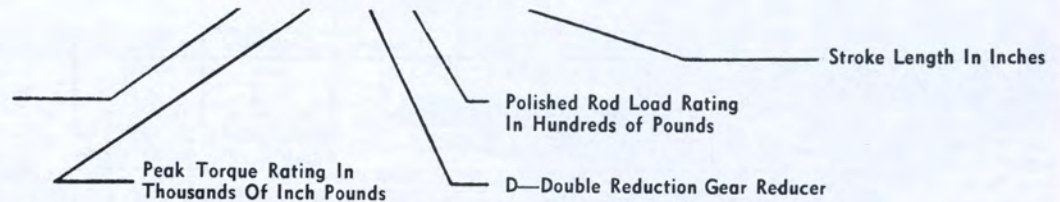

INSTRUCTIONS FOR ORDERING SPARE PARTS

WHEN ORDERING SPARE PARTS, THE DESIGNATION AND SERIAL NUMBER OF THE UNIT MUST BE GIVEN. This information is necessary in addition to the description of the part, part number, etc. By supplying all the

information available our personnel will have a cross check on the particular part wanted and errors in typing, etc. can be circumvented.

LUBRICATION INSTRUCTIONS

LUFKIN PUMPING UNITS

GEAR REDUCER:

For temperatures down to 0° F use an SAE 90EP or an AGMA 6EP premium mild extreme pressure lubricant (preferably a sulphur-phosphorous type) with rust and oxidation inhibitors and an anti-foam agent. Pour point of the oil should be 5° F or lower.

For temperatures down to -30° F use an SAE 80EP or an AGMA 3EP premium mild extreme pressure lubricant (preferably sulphur-phosphorous type) with rust and oxidation inhibitors and anti-foam agent. Pour point of the oil should be -15° F or less.

If desired, units can be shipped with the gear reducer filled with oil that will comply with the above specifications.

Maintain the oil level above the low mark on gage but do not fill the gear reducer above the high mark on gage.

Every six months the operator should collect a typical sample of the oil in a glass jar. A visual inspection will expose possible dirt, sludge, water emulsion or other forms of contamination. If the lubricant has an abnormal appearance or smell, check with your oil supplier about replacement.

STRUCTURAL BEARINGS

All structural bearings are lubricated at the factory; however, they do require periodic relubrication as outlined below.

1. WARM CLIMATES: (Lowest annual temperature is above 0° F.)

Roller Bearings except Tapered Roller Crank Pin Bearings should be relubricated every 6 months. Use a premium NLGI No. 1 lithium soap base grease with an extreme pressure additive. Do not use soda soap grease.

Bronze Bearings and Tapered Roller Crank Pin Bearings should be relubricated as required to maintain oil level. Use an EP140 extreme pressure oil with an extreme pressure additive and a pour point of +15° F or lower. If available, the use of a heavier oil (viscosity up to 6600 SUS at 100° F) is recommended.

2. COLD CLIMATES: (Lowest annual temperature down to -30° F.)

Roller Bearings except Tapered Roller Crank Pin Bearings should be relubricated every 6 months. Use a premium NLGI No. 0 lithium soap base grease with an extreme pressure additive. Do not use soda soap grease.

Bronze Bearings and Tapered Roller Crank Pin Bearings should be relubricated as required to maintain oil level by removing fill plug and adding oil until reservoir is full. Use an EP 80 or EP 90 extreme pressure oil with an extreme pressure additive and a pour point of -10° F. or lower.

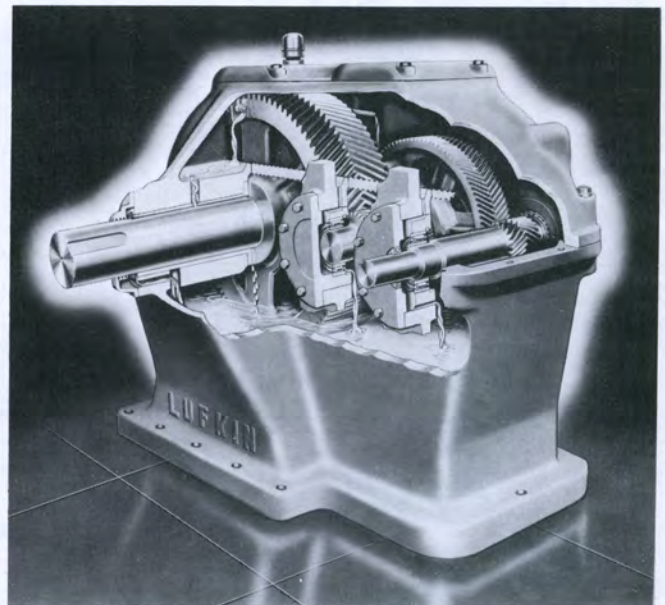


FIGURE 3

As long as the oil is maintained at the proper level, the slow speed and high speed gears dip in oil and provide continuous lubrication to the gear mesh.

Large oil wipers direct a flood of oil into oversized oil troughs which in turn provide each individual bearing with more than adequate lubrication.

LUFKIN BEAM BALANCED PUMPING UNIT ASSEMBLIES
STRUCTURAL SPECIFICATIONS AND DIMENSIONS

See page 4 for GEAR Specifications

UNIT	B-57D-109-48	B-57D-109-42	B-40D-76-42	B-40D-89-36	B-25D-67-36	B-25D-53-30	B-16D-53-30	B-16D-53-24
Polished Rod Cap., #	10,900	10,900	7,600	8,900	6,700	5,300	5,300	5,300
Stroke Lengths, Ins.	48, 36	42, 32	42, 32	36, 28	36, 24	30, 25	30, 25	24, 20
Walking Beam	16" x 45 Lbs.	16" x 45 Lbs.	14" x 34 Lbs.	14" x 34 Lbs.	14" x 34 Lbs.	10" x 25 Lbs.	10" x 25 Lbs.	10" x 21 Lbs.
Equalizer Bearing	BRONZE BUSHED, OIL BATH TYPE							
Center Bearing	BRONZE BUSHED, OIL BATH TYPE							
Crank Pin Bearings	BRONZE BUSHED, OIL BATH TYPE				SPHERICAL ROLLER BEARINGS			
Wireline Hanger	3/8" x 9" Ctrs.	3/8" x 6 1/2" Ctrs.	3/4" x 6 1/2" Ctrs.	3/4" x 6 1/2" Ctrs.	3/8" x 6 1/2" Ctrs.	1/2" x 5 1/2" Ctrs.	1/2" x 5 1/2" Ctrs.	1/2" x 5 1/2" Ctrs.
*1" thick Beam Wts., #	150	150	125	125	125	100	100	100
No. of Beam Weights	EFFECTIVE COUNTERBALANCE AT POLISHED ROD, LBS.							
0	400	550	420	550	300	170	170	265
1	700	880	660	830	520	345	345	470
2	1000	1205	895	1105	740	515	515	670
3	1300	1530	1130	1380	955	685	685	870
4	1595	1850	1365	1650	1170	850	850	1065
5	1890	2165	1595	1915	1380	1015	1015	1260
6	2180	2480	1825	2180	1590	1175	1175	1445
7	2490	2790	2050	2440	1795	1330	1330	1635
8	2760	3100	2275	2700	2000	1485	1485	1820
9	3045	3405	2495	2955	2200	1645	1645	2000
10	3325	3710	2715	3210	2400	1795	1795	2175
11	3605	4010	2930	3460	2595	1940	1940	2350
12	3885	4300	3145	3705	2790	2090	2090	2525
13	4160	4595	3360	3950	2980	2230	2230	2690
14	4435	4890	3570	4190	3170	2375	2375	2855
15	4705	5180	3780	4430	3355	2520	2520	3015
16	4975	5470	3985	4665	3540	2665	2665	3175
17	5240	5755	4190	4900	3720	2785	2785	3330
18	5505	6040	4390	5130	3900	2920	2920	3485
19	5765	6320	4590	5360	4075	3050	3050	3635
20	6025	6600	4790	5585	4245	3180	3180	3785
21	6280	6875	4985	5810	4415	3300	3300	3925
22	6535	7150	5180	6030	4580	3425	3425	4065
23	6785	7420	5370	6250	4745	3545	3545	4205
24	7035	7685	5560	6465	4905	3660	3660	4340
25	7280	7950	5745	6680	5065	3780	3780	
26	7525	8210	5930	6890	5220	3890	3890	
27	7770	8470	6110	7100	5375	4000	4000	
28	8010							
29	8250							
30	8485							

Note: * 3" thick Beam Weights optional for all Beam Balanced units.
 † On B-25D-53-30 and B-16D, units, stroke length changes are obtained by moving equalizer bearing on beam.

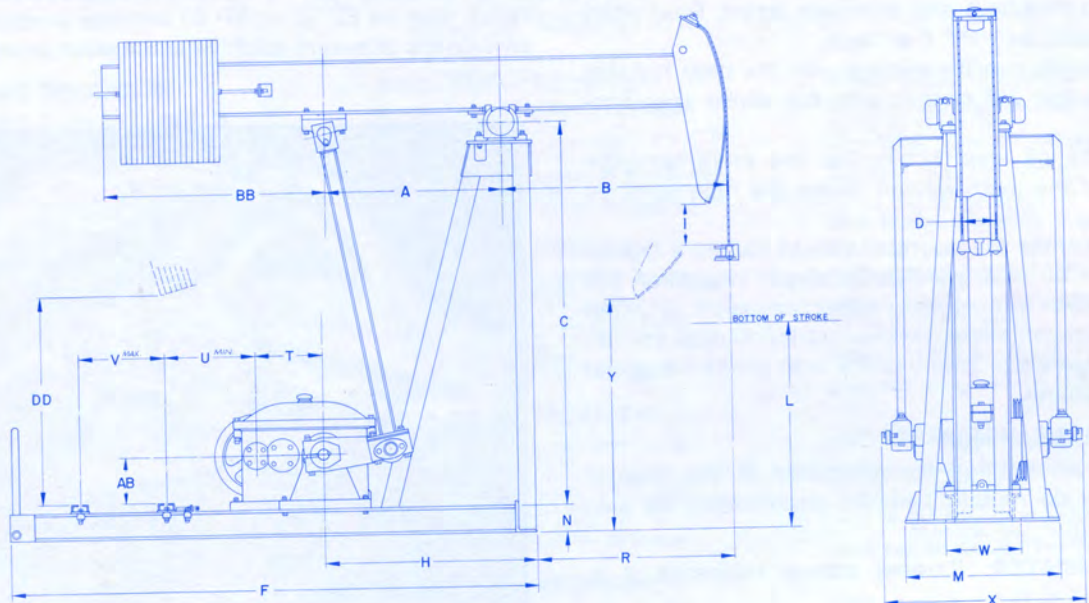


FIGURE 4

GENERAL DIMENSIONS

UNIT	A	B	C	D	F	H	I	L	M	N	R	T	U	V	W	X	Y	AB	BB	DD
B-57D-109-48	46	64	8'-9"	9	13'-3"	69	14 1/2	43 3/4	40 3/4	10	43	20	24 1/4	39 3/4	25	57 1/2	69 3/4	14 3/4	7'-1"	47 1/4
B-57D-109-42	"	56	"	6 1/2	"	"	15 1/2	51	"	35	41	"	"	"	"	"	75 1/2	10 3/4	6'-6"	50
*B-40D-76-42	"	"	8'-2 1/2"	"	11'-8 1/2"	61	"	42	38 1/2	8	17 1/2	19	34 1/4	20	50 3/4	67	72 1/2	12	63	50 3/4
*B-40D-89-36	"	48	"	"	"	"	13	50 1/2	"	33	"	"	"	"	"	"	72 1/2	"	61 1/2	51 1/4
B-25D-67-36	32	48	7'-0 1/2"	"	10'-4"	48	"	34 1/2	31	6	34	13 1/2	18	39	16 3/4	45	56 1/2	48	40	34 3/4
B-25D-53-30	33	41 1/4	70 1/2	5 1/2	9'-7"	39	6	36	28 1/2	5	35 1/4	12 3/4	10 1/2	25 1/4	13 3/4	35	47	8 1/2	"	"
B-16D-53-30	"	"	"	"	8'-0 1/2"	"	"	35	"	"	"	"	"	"	"	"	52 1/2	"	36	36 1/4
B-16D-53-24	"	33	"	"	"	"	12 1/2	35 3/4	"	"	27	"	"	"	"	"	"	"	"	"

* Base Shown Is For Electric Motor Only, For Gas Engine Drive Dim. "F" is 13'-4", Dim. "U" is 19, and Dim. "V" is 53 1/4.

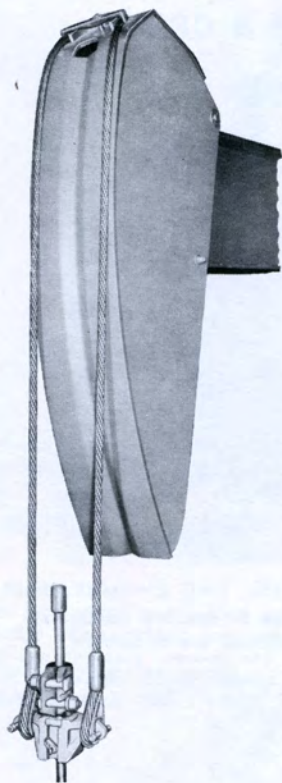


FIGURE 5
HORSEHEAD AND WIRE LINE ASSEMBLY
Easily aligned with polished rod without disconnecting well load. One-piece arc plate is used for greater strength.

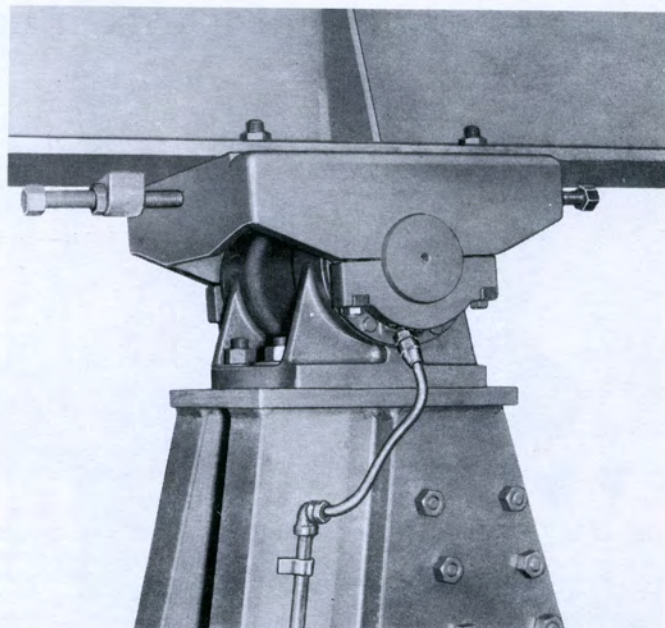


FIGURE 6
CENTER BEARING ASSEMBLY
Furnished with roller bearings on some C-114D and all larger sizes.

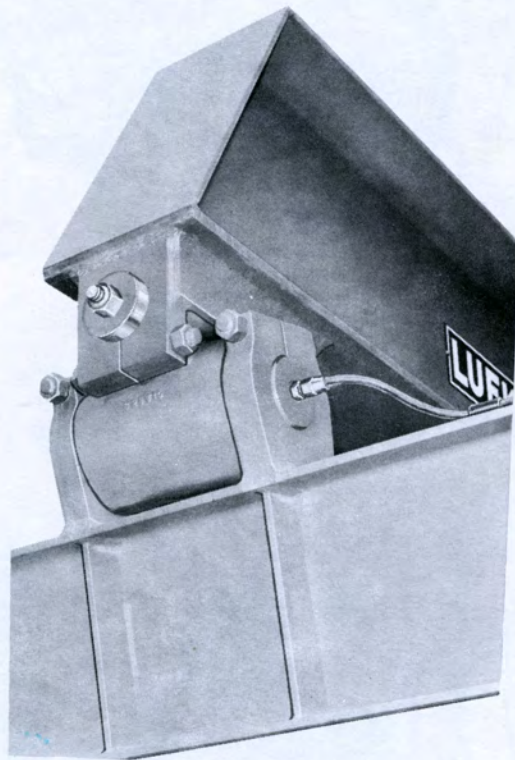


FIGURE 7
CRANK BALANCED UNIT EQUALIZER BEARING ASSEMBLY
Furnished with roller bearings on all sizes. Cross-pin type connection to walking beam is utilized.

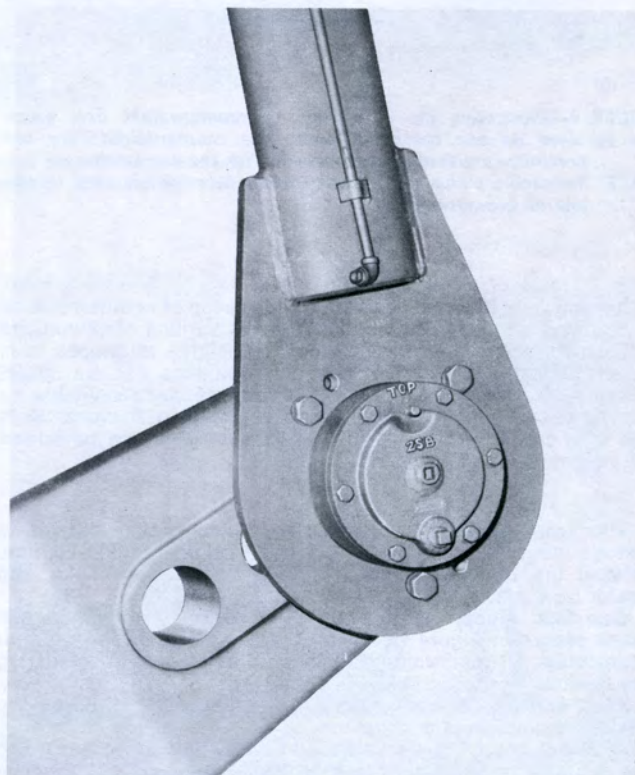


FIGURE 8
CRANK PIN ASSEMBLY
Furnished with roller bearings on some C-114D and all larger sizes.

**A WIDER RANGE OF COUNTERBALANCE
AVAILABLE WITH THE TROUT COUNTERBALANCED TYPE B CRANK**

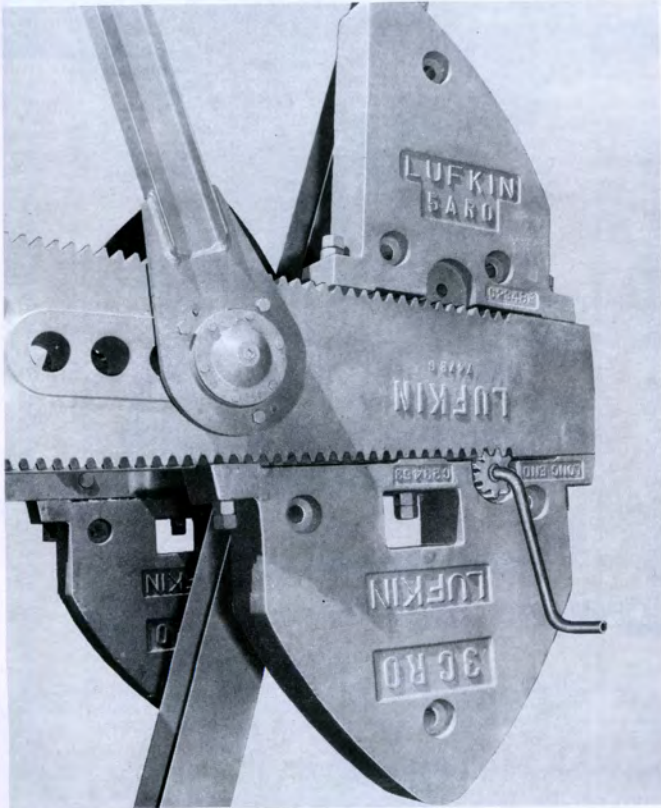


FIGURE 9—illustrating the wide range of counterweight sizes which can be used on one crank. Different size counterweights are not normally furnished or recommended for the same unit.
NOTE: Removable pinion (with crank handle attached) is used to adjust all counterweights.

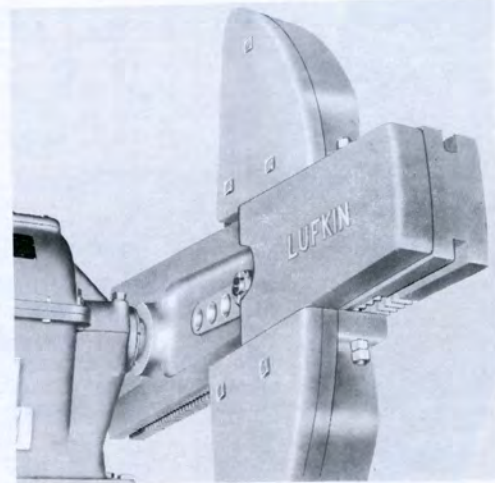


FIGURE 10
Various combinations of type S auxiliary counterweights available for additional counterbalance.

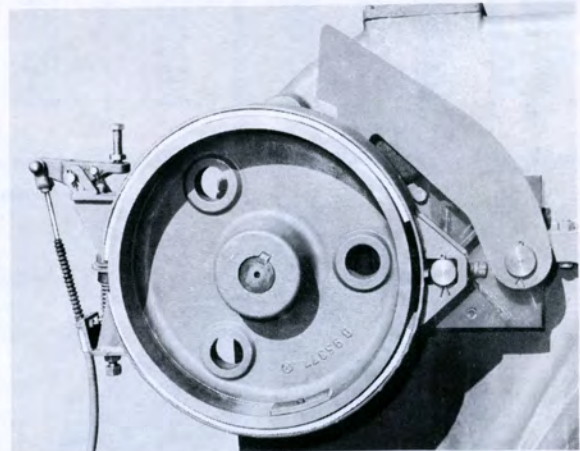


FIGURE 11a
Engaged Position

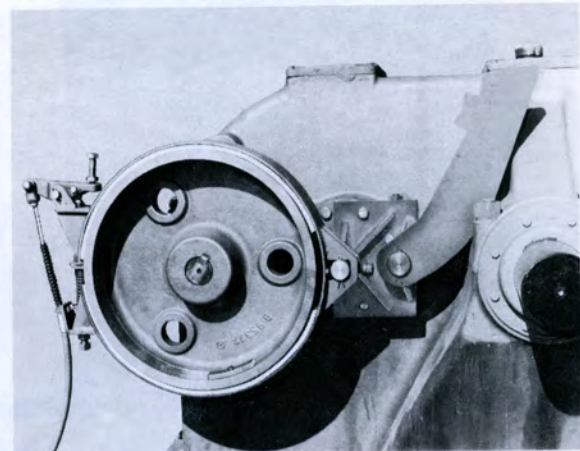


FIGURE 11b
Disengaged Position

FLEX-SHOE BRAKE

Lufkin's Flex-Shoe brake provides much greater holding capacity than the Clam Shell type formerly used. Smoother acting with no "grabbing." Positive stop pawl can be engaged with notches in brake drum to provide additional safety.

As shown in Figures 9 and 10, a wide range of counterbalance is available on all LUFKIN units. With the various combinations of counterweights and auxiliary counterweights to choose from a very economical selection of counterbalance can be made. Note in Figure 10 the extra counterbalance made available by the increased thickness at the end of the type B crank. With this type crank up to 8 type S auxiliary weights can be added for maximum counterbalance.

The Trout Counterbalanced Crank, using sliding weights to change the counterbalance effect, is an Original Lufkin Feature. Moving the counterweights has been made even safer and easier by the addition of a rack and pinion.

One Man Alone, using the special combination pinion and crank shown in Figure 9, can make the adjustment in a matter of minutes. All four weights can be adjusted without changing the position of the cranks.

Rack and pinion type cranks are regularly furnished on the C-40D assemblies and larger.

With the Trout Counterbalanced Crank there is no hazard to the operator or equipment as it is impossible for Trout counterweights to slide off the crank even when bolts are loosened, so long as nuts are not completely removed from bolts.

This same Safe, Simple and Easy Trout Counterbalance has been in use over a period of many years and has been installed on over ONE HUNDRED AND TWENTY-TWO THOUSAND LUFKIN PUMPING UNITS.



FIGURE 12

HI-PRIME PUMPING UNIT with elevated motor provides protection from high water and drifting sand and snow. If unit is moved to a location where electric power is not available, bolted-on motor support can be easily removed and a jointed gas engine base installed. Short foundation block reduces installation costs. Available in all structures using 40D through 912D gear reducers. Unit shown is a C-228D-246-86.



FIGURE 13

HEAVY DUTY "STRONGBACK" Portable base is standard on all units with reducer end working center 7'-0" and greater. Available at added cost to smaller units. Bases are also available with "UNISET" plated bottom to permit installation directly on soil with a minimum bearing capacity of 1500 pounds per square foot. Unit shown is a C-320D-256-120.

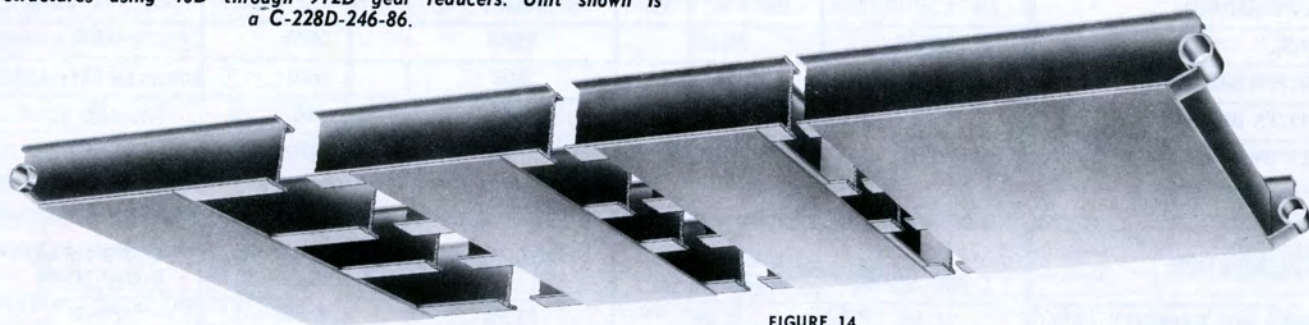


FIGURE 14

BOTTOM VIEW of Uniset portable base available with both conventional and air balanced pumping units.



FIGURE 15

JOINTED SLOW SPEED ENGINE BASE, tailor made to fit particular prime mover. Since slide rails are not required with this type base the center of gravity is kept low, thus reducing vibration. Unit shown is a C-456D-256-144 driven by a SLOW SPEED Engine.



FIGURE 16

JOINTED ELL BASE adapts easily to all multi-cylinder engines by using slide rails. This type engine base can also be used with fly-wheel-clearing slow speed engines as shown on this C-160D-173-74 unit.

CONVENTIONAL PUMPING UNIT SPECIFICATIONS

UNIT DESIGNATION	C-912D-365-168 C-640D-365-168	C-912D-305-168 C-640D-305-168 C-456D-305-168	C-912D-427-144	C-912D-365-144 C-640D-365-144	C-640D-305-144 C-456D-305-144
POLISHED ROD CAPACITY, LBS.	36,500	30,500	42,700	36,500	30,500
STROKE LENGTHS, INCHES	168, 145, 124	168, 145, 124	144, 124, 106	144, 124, 106	144, 124, 106
WALKING BEAM	33" x 220 Lbs.	33" x 200 Lbs.	33" x 220 Lbs.	33" x 200 Lbs.	30" x 172 Lbs.
WIRELINE HANGER	1 3/8" x 16" CTRS.	1 1/4" x 16" CTRS.	1 3/8" x 16" CTRS.	1 3/8" x 16" CTRS.	1 1/4" x 16" CTRS.
CRANKS	94110B	94110B	94110B	94110B	94110B
CRANK PIN BEARING	1SB	1SB	1SB	1SB	1SB
EQUALIZER BEARING	OR	OR	OR	OR	OR
CENTER BEARING	OTG	OTG	OTG	OTG	1TG

UNIT DESIGNATION	C-640D-256-144 C-456D-256-144 C-320D-256-144	C-456D-365-120	C-640D-305-120 C-456D-305-120	C-456D-256-120 C-320D-256-120	C-456D-213-120 C-320D-213-120 C-228D-213-120
POLISHED ROD CAPACITY, LBS.	25,600	36,500	30,500	25,600	21,300
STROKE LENGTHS, INCHES	144, 124, 106	120, 105, 90	120, 102, 85	120, 102, 85	120, 102, 85
WALKING BEAM	27" x 160 Lbs.	30" x 190 Lbs.	27" x 160 Lbs.	27" x 145 Lbs.	24" x 130 Lbs.
WIRELINE HANGER	1 1/4" x 16" CTRS.	1 3/8" x 12" CTRS.	1 1/4" x 12" CTRS.	1 1/8" x 12" CTRS.	1 1/8" x 12" CTRS.
CRANKS	94110B	94110B	8495B	8495B	8495B
CRANK PIN BEARING	1SB	1SB	2SB	2SB	2SB
EQUALIZER BEARING	OR	OR	OR	1R	1R
CENTER BEARING	1TG	OTG	1TG	2TG	2TG

UNIT DESIGNATION	C-320D-305-100	C-456D-256-100 C-320D-256-100	C-228D-213-100	C-228D-173-100 C-160D-173-100	C-320D-246-86 C-228D-246-86
POLISHED ROD CAPACITY, LBS.	30,500	25,600	21,300	17,300	24,600
STROKE LENGTHS, INCHES	100, 85, 70	100, 85, 70	100, 86, 73	100, 86, 73	86, 74, 61
WALKING BEAM	27" x 160 Lbs.	27" x 145 Lbs.	24" x 120 Lbs.	24" x 100 Lbs.	24" x 120 Lbs.
WIRELINE HANGER	1 1/4" x 12" CTRS.	1 1/8" x 12" CTRS.	1 1/8" x 12" CTRS.	1 1/8" x 12" CTRS.	1 1/8" x 12" CTRS.
CRANKS	8495B	8495B	7478B	7478B	8495B
CRANK PIN BEARING	2SB	2SB	2SB	3SC	3SC
EQUALIZER BEARING	1R	1R	1R	2RA	2RA
CENTER BEARING	2TG	2TG	2TG	2TG	2TG

UNIT DESIGNATION	C-320D-213-86 C-228D-213-86	C-160D-173-86	C-114D-119-86	C-320D-246-74	C-228D-200-74 C-160D-200-74
POLISHED ROD CAPACITY, LBS.	21,300	17,300	11,900	24,600	20,000
STROKE LENGTHS, INCHES	86, 74, 62	86, 74, 62	86, 72, 59	74, 64, 54	74, 64, 54
WALKING BEAM	24" x 100 Lbs.	24" x 94 Lbs.	24" x 84 Lbs.	24" x 100 Lbs.	24" x 94 Lbs.
WIRELINE HANGER	1 1/8" x 12" CTRS.	1 1/8" x 12" CTRS.	1 1/8" x 12" CTRS.	1 1/8" x 9" CTRS.	1" x 9" CTRS.
CRANKS	7478B	7478B	6468B	7478B	7478B
CRANK PIN BEARING	3SC	3SC	4SC	3SC	3SC
EQUALIZER BEARING	2RA	2RA	3R	2RA	2RA
CENTER BEARING	2TG	2TG	4TG	2TG	2TG

NOTE: Preferred units shown in blue are manufactured in larger quantities and are often more readily available. All other standard units are shown in black.

CONVENTIONAL PUMPING UNIT SPECIFICATIONS

UNIT DESIGNATION	C-228D-173-74 C-160D-173-74	C-160D-143-74 C-114D-143-74	C-160D-173-64 C-114D-173-64	C-160D-143-64 C-114D-143-64
POLISHED ROD CAPACITY, LBS.	17,300	14,300	17,300	14,300
STROKE LENGTHS, INCHES	74, 62, 51	74, 62, 51	64, 54, 44	64, 52, 40
WALKING BEAM	24" x 84 Lbs.	24" x 84 Lbs.	24" x 84 Lbs.	18" x 70 Lbs.
WIRELINE HANGER	1" x 9" CTRS.	1" x 9" CTRS.	1" x 9" CTRS.	1" x 9" CTRS.
CRANKS	6468B	6468B	6468B	5456B
CRANK PIN BEARING	3SC	4SC	4SC	4SC
EQUALIZER BEARING	2RA	3R	3R	3R
CENTER BEARING	2TG	4TG	4TG	4TG

UNIT DESIGNATION	C-114D-173-54	C-114D-133-54	C-57D-76-54
POLISHED ROD CAPACITY, LBS.	17,300	13,300	7,600
STROKE LENGTHS, INCHES	54, 44, 34	54, 45, 36	54, 41, 28
WALKING BEAM	18" x 70 Lbs.	18" x 60 Lbs.	16" x 36 Lbs.
WIRELINE HANGER	1" x 9" CTRS.	7/8" x 9" CTRS.	3/4" x 9" CTRS.
CRANKS	5456B	4850B	4246B
CRANK PIN BEARING	4SC	5A	5A
EQUALIZER BEARING	3R	4R	5R
CENTER BEARING	4TG	4TG	5C

UNIT DESIGNATION	C-57D-109-48	C-57D-95-48	C-40D-76-48	C-57D-89-42 C-40D-89-42	C-57D-76-42 C-40D-76-42
POLISHED ROD CAPACITY, LBS.	10,900	9,500	7,600	8,900	7,600
STROKE LENGTHS, INCHES	48, 37, 25	48, 37, 25	48, 37, 27	42, 33, 23	42, 33, 23
WALKING BEAM	16" x 45 Lbs.	16" x 40 Lbs.	16" x 36 Lbs.	16" x 36 Lbs.	14" x 34 Lbs.
WIRELINE HANGER	7/8" x 9" CTRS.	7/8" x 9" CTRS.	7/8" x 9" CTRS.	3/4" x 6 1/2" CTRS.	3/4" x 6 1/2" CTRS.
CRANKS	4246B	4246B	3644B	3644B	3644B
CRANK PIN BEARING	5A	5A	6	6	6
EQUALIZER BEARING	5R	5R	7R	7R	7R
CENTER BEARING	5C	5C	6CA	6CA	6CA

UNIT DESIGNATION	C-40D-89-36	C-25D-67-36	C-25D-56-36	C-25D-67-30	C-25D-53-30
POLISHED ROD CAPACITY, LBS.	8,900	6,700	5,600	6,700	5,300
STROKE LENGTHS, INCHES	36, 28, 20	36, 28, 20	36, 28, 20	30, 20	30, 20
WALKING BEAM	14" x 34 Lbs.	12" x 31 Lbs.	12" x 27 Lbs.	12" x 27 Lbs.	10" x 25 Lbs.
WIRELINE HANGER	3/4" x 6 1/2" CTRS.	5/8" x 6 1/2" CTRS.	5/8" x 6 1/2" CTRS.	5/8" x 6 1/2" CTRS.	1/2" x 6 1/2" CTRS.
CRANKS	3644B	3644B	3644B	2436B	2436B
CRANK PIN BEARING	6	6	6	6	6
EQUALIZER BEARING	7R	7R	7R	7R	7R
CENTER BEARING	6CA	6CA	6CA	6CA	6CA

NOTE: Preferred units shown in blue are manufactured in larger quantities and are often more readily available. All other standard units are shown in black.

CONVENTIONAL COUNTERBALANCE DATA

All Counterbalance Shown In Lbs., Effective At Polished Rod With Weights At Maximum Position, **Including Structural Unbalance.**

See Example below.

UNIT	C-912D-365-168 C-912D-305-168 C-640D-365-168 C-640D-305-168 C-456D-305-168	C-912D-427-144 C-912D-365-144 C-640D-365-144	C-640D-305-144 C-456D-305-144	C-640D-256-144 C-456D-256-144 C-320D-256-144	C-456D-365-120	C-640D-305-120 C-456D-305-120	C-456D-256-120 C-320D-256-120	C-456D-213-120 C-320D-213-120 C-228D-213-120
STROKE	168"	144"	144"	144"	120"	120"	120"	120"
STRUCTURAL UNBALANCE*	-1,500 Lbs.	-650 Lbs.	-520 Lbs.	-400 Lbs.	+570 Lbs.	-120 Lbs.	+55 Lbs.	0 Lbs.
CRANKS	94110B	94110B	94110B	94110B	94110B	8495B	8495B	8495B
C'Bal., Cranks Only	4,270	6,080	6,250	6,370	8,540	5,575	5,745	5,690
4 No. OORO Counterweights	19,675	24,065	24,325	29,835
4 No. OOS Aux. Weights	24,315	29,485	36,250
8 No. OOS Aux. Weights	28,960	34,905
4 No. ORO Counterweights	17,690	21,750	22,000	22,120	27,090	20,800	20,965
4 No. OS Aux. Weights	22,145	26,950	27,225	33,250	25,855
8 No. OS Aux. Weights	26,600	32,150	39,405
4 No. OARO Counterweights	15,600	19,310	19,550	19,670	24,205	18,635	18,800	18,745
4 No. OAS Aux. Weights	19,110	23,405	23,665	23,785	29,055	22,675	22,840
8 No. OAS Aux. Weights	22,615	27,500	27,780	33,900	26,715
4 No. 1RO Counterweights	13,030	16,310	16,530	16,650	20,650	15,690	15,860	15,805
4 No. 1S Aux. Weights	15,725	19,455	19,690	19,810	24,370	18,800	18,965	18,910
8 No. 1S Aux. Weights	18,415	22,595	22,850	22,970	28,095	21,905	22,070
4 No. 2RO Counterweights	11,555	14,590	14,800	14,920	18,615	13,985	14,155	14,100
4 No. 2S Aux. Weights	14,165	17,635	17,865	17,985	22,220	16,995	17,165	17,110
8 No. 2S Aux. Weights	16,780	20,685	20,930	21,050	25,830	20,010	20,175	20,120
4 No. 3CRO Counterweights	10,130	12,925	13,125	13,245	16,640	12,390	12,555	12,500
4 No. 3BS Aux. Weights	12,655	15,870	16,090	16,210	20,130	15,320	15,490	15,435
8 No. 3S Aux. Weights	15,180	18,815	19,055	19,175	23,620	18,250	18,425	18,370
4 No. 5ARO Counterweights	8,510	11,035	11,225	11,345	14,405	10,550	10,720	10,665
4 No. 5A Aux. Weights	10,220	13,030	13,230	13,350	16,765	12,560	12,730	12,675
8 No. 5A Aux. Weights	11,930	15,025	15,235	15,355	19,125	14,570	14,740	14,685
4 No. 5CRO Counterweights	7,370	9,705	9,890	10,010	12,830	9,235	9,405	9,350
4 No. 5C Aux. Weights	8,910	11,500	11,695	11,815	14,955	11,045	11,215	11,160
8 No. 5C Aux. Weights	10,445	13,295	13,500	13,620	17,080	12,855	13,020	12,965

UNIT	C-228D-173-74 C-160D-173-74	C-160D-143-74 C-114D-143-74	C-160D-173-64 C-114D-173-64	C-160D-143-64 C-114D-143-64	C-114D-173-54	C-114D-133-54	C-57D-76-54
STROKE	74"	74"	64"	64"	54"	54"	54"
STRUCTURAL UNBALANCE*	+450 Lbs.	+300 Lbs.	+550 Lbs.	+360 Lbs.	+500 Lbs.	+330 Lbs.	0 Lbs.
CRANKS	6468B	6468B	6468B	5456B	5456B	4850B	4246B
C'Bal., Cranks Only	4,125	3,681	4,755	2,660	3,180	2,845	1,649
4 No. 3CRO Counterweights	11,185	11,050	12,835	8,820	10,370
4 No. 3BS Aux. Weights	14,220	14,090	11,465	13,460
8 No. 3S Aux. Weights	16,550
4 No. 5ARO Counterweights	9,445	9,305	10,845	7,445	8,765	7,470	5,760
4 No. 5A Aux. Weights	11,605	11,470	13,315	9,390	11,035	9,360	7,440
8 No. 5A Aux. Weights	13,765	13,635	15,785	11,335	13,305	11,250
4 No. 5CRO Counterweights	8,065	7,925	9,265	6,215	7,335	6,320	4,750
4 No. 5C Aux. Weights	10,015	9,880	11,495	7,980	9,390	8,040	6,285
8 No. 5C Aux. Weights	11,965	11,830	13,725	9,740	11,445	9,760
4 No. 6RO Counterweights	7,205	7,065	8,280	5,455	6,440	5,595	4,120
4 No. 6 Aux. Weights	8,365	8,225	9,610	6,505	7,670	6,635	5,050
8 No. 6 Aux. Weights	9,525	9,390	10,940	7,560	8,900	7,675	5,985
4 No. 7RO Counterweights	6,110	5,965	7,025	4,470	5,295	4,645	3,275
4 No. 7 Aux. Weights	6,995	6,855	8,040	5,280	6,245	5,460	4,005
8 No. 7 Aux. Weights	7,880	7,740	9,055	6,095	7,190	6,270	4,740

EXAMPLE:

A C-640D-305-144 Unit with 4 No. OARO Counterweights and 4 No. OAS Auxiliary Weights would have a maximum counterbalance effect of 23,665 pounds in the 144" stroke. This effect includes a structural unbalance of -520 pounds. If the counterbalance effect is desired for the 106" stroke, subtract the structural unbalance from the effect in the 144" stroke and multiply this difference by the ratio of 144 ÷ 106; then add the structural unbalance to this product. Thus, counterbalance effect in the 106" stroke = [23,665 - (-520)] × 144/106 + (-520) = 24,185 × 144/106 - 520 = 32,335 pounds.

* Structural Unbalance with a negative (-) sign indicates a walking beam assembly that is heavy on the well end. Structural Unbalance without the negative sign indicates a walking beam assembly that is heavy on the gear reducer end.

NOTE: Preferred units shown in blue are manufactured in larger quantities and are often more readily available. All other standard units are shown in black.

CONVENTIONAL COUNTERBALANCE DATA

All Counterbalance Shown In Lbs., Effective At Polished Rod With Weights At Maximum Position, **Including Structural Unbalance.**

See Example below.

UNIT	C-456D-256-100 C-320D-256-100 C-320D-305-100	C-228D-213-100 C-228D-173-100 C-160D-173-100	C-320D-246-86 C-228D-246-86	C-320D-213-86 C-228D-213-86	C-160D-173-86	C-114D-119-86	C-320D-246-74 C-228D-200-74 C-160D-200-74
STROKE	100"	100"	86"	86"	86"	86"	74"
STRUCTURAL UNBALANCE*	+550 Lbs.	+0 Lbs.	+800 Lbs.	+450 Lbs.	+450 Lbs.	+115 Lbs.	+800 Lbs.
CRANKS	8495B	7478B	8495B	7478B	7478B	6468B	7478B
C'Bal. Cranks Only	7,390	3,786	8,725	4,850	4,850	3,184	5,890
4 No. OARO Counterweights	23,070
4 No. OAS Aux. Weights	27,925
4 No. 1RO Counterweights	19,535	12,710	22,810
4 No. 1S Aux. Weights	23,270	16,040
8 No. 1S Aux. Weights	27,000	19,370
4 No. 2RO Counterweights	17,490	11,485	20,435	13,800	13,800	16,235
4 No. 2S Aux. Weights	21,105	14,240	17,005	17,005	19,935
8 No. 2S Aux. Weights	24,720	16,995
4 No. 3CRO Counterweights	15,570	10,085	18,210	12,175	12,175	9,410	14,355
4 No. 3BS Aux. Weights	19,095	12,780	22,295	15,310	15,310	17,975
8 No. 3S Aux. Weights	22,620	15,475	18,445	21,595
4 No. 5ARO Counterweights	13,365	8,450	15,655	10,270	10,270	7,905	12,155
4 No. 5A Aux. Weights	15,780	10,335	18,450	12,465	12,465	9,775	14,685
8 No. 5A Aux. Weights	18,195	12,220	21,245	14,660	14,660	11,645	17,215
4 No. 5CRO Counterweights	11,780	7,230	13,820	8,855	8,855	6,710	10,515
4 No. 5C Aux. Weights	13,955	8,935	16,340	10,835	10,835	8,400	12,805
8 No. 5C Aux. Weights	16,130	10,640	18,860	12,815	12,815	10,085	15,095
4 No. 6RO Counterweights	10,795	6,465	12,675	7,965	7,965	5,965	9,490
4 No. 6 Aux. Weights	12,075	7,475	14,160	9,140	9,140	6,970	10,845
8 No. 6 Aux. Weights	13,360	8,485	15,650	10,315	10,315	7,975	12,205
4 No. 7RO Counterweights	9,560	5,505	11,240	6,845	6,845	5,015	8,195
4 No. 7 Aux. Weights	10,530	6,270	12,370	7,740	7,740	5,780	9,225
8 No. 7 Aux. Weights	11,500	7,040	13,495	8,635	8,635	6,550	10,260

UNIT	C-57D-109-48 C-57D-95-48	C-40D-76-48	C-57D-89-42 C-57D-76-42 C-40D-89-42 C-40D-76-42	C-40D-89-36 C-25D-67-36 C-25D-56-36	C-25D-67-30 C-25D-53-30
STROKE	48"	48"	42"	36"	30"
STRUCTURAL UNBALANCE*	+320 Lbs.	0 Lbs.	+150 Lbs.	+275 Lbs.	+150 Lbs.
CRANKS	4246B	3644B	3644B	3644B	2436B
C'Bal., Cranks Only	2,175	1,338	1,675	2,055	1,370
4 No. 5ARO Counterweights	6,800
4 No. 5A Aux. Weights	8,690
8 No. 5A Aux. Weights
4 No. 5CRO Counterweights	5,665	4,525	5,300	6,285
4 No. 5C Aux. Weights	7,395	6,160	7,165
8 No. 5C Aux. Weights
4 No. 6RO Counterweights	4,955	3,995	4,700	5,580	4,400
4 No. 6 Aux. Weights	6,005	5,000	5,840	6,915	5,540
8 No. 6 Aux. Weights	7,055	*6,985
4 No. 7RO Counterweights	4,005	3,090	3,670	4,380	3,400
4 No. 7 Aux. Weights	4,830	3,885	4,570	5,435	4,320
8 No. 7 Aux. Weights	5,655	**5,475

EXAMPLE:

A C-456D-305-144 with 4 No. OARO counterweights and 3 No. OAS auxiliary weights would have a maximum counterbalance effect in the 144" stroke of $19550 + \frac{3}{4} (23665 - 19550) = 22635$ pounds. With this same combination of weights, the counterbalance effect in the 106" stroke is $[22635 - (-520)] \times 144/106 + (-520) = 30935$ pounds.

To convert effective counterbalance to maximum counterbalance torque for dynamometer card analysis, multiply the pounds counterbalance, minus the structural unbalance, by the torque factor at the 90° crank position.

** Do not use on 40D units.

NOTE: Preferred units shown in blue are manufactured in larger quantities and are often more readily available. All other standard units are shown in black.

**CONVENTIONAL PUMPING UNIT ASSEMBLIES
GENERAL DIMENSIONS**

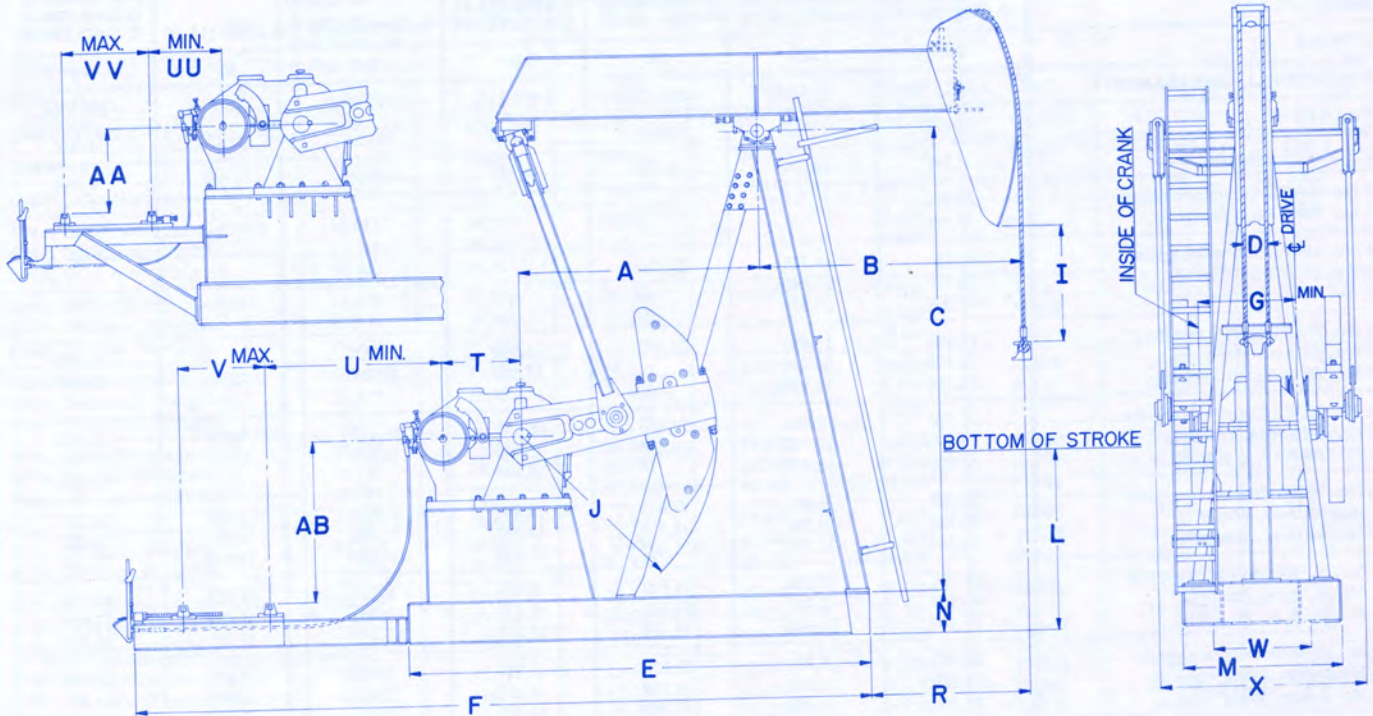


FIGURE 17

UNIT	A	B	C	D	E	F	G	I	J	L	M	N	R	T	U	V	W	X	AA	AB	UU	VV
C-912D-365-168	10'-0"	17'-6"	20'-6"	16"	18'-9½"	29'-10½"	53½"	20½"	110"	62½"	6'3¼"	16"	13'-9½"	48½"	89¼"	48½"	46¼"	8'-2½"	51¼"	93"	22½"	50½"
C-912D-305-168	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
C-912D-427-144	"	15'-0"	"	"	"	"	"	33¼"	"	74½"	"	"	11'-3½"	"	"	"	"	"	"	"	"	"
C-912D-365-144	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
C-640D-365-168	"	17'-6"	"	"	18'-6"	29'-7"	51½"	20½"	"	62½"	"	"	13'-9½"	41½"	92¾"	"	"	"	"	"	26¼"	"
C-640D-305-168	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
C-640D-365-144	"	15'-0"	"	"	"	"	"	33¼"	"	74½"	"	"	11'-3½"	"	"	"	"	"	"	"	"	"
C-640D-305-144	"	"	20'-4"	"	"	"	"	33"	"	72½"	"	"	"	"	"	"	"	"	"	"	"	"
C-640D-256-144	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
C-640D-305-120	9'-3"	12'-11"	18'-2"	12"	17'-6"	27'-4"	52½"	26"	95"	77¼"	70"	"	9'-5½"	"	77¼"	"	"	8'-1"	51½"	78"	26¼"	37¼"
C-456D-305-168	10'-0"	17'-6"	20'-6"	16"	18'-6"	29'-7"	51½"	20½"	110"	62½"	6'3¼"	"	13'-9½"	38½"	96"	"	"	8'-2½"	51¼"	93"	29½"	50½"
C-456D-305-144	"	15'-0"	20'-4"	"	"	"	"	33"	"	72½"	"	"	11'-3½"	"	"	"	"	"	"	"	"	"
C-456D-256-144	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
C-456D-365-120	"	12'-8"	20'-6"	12"	"	"	"	55¼"	"	75"	"	"	8'-11½"	"	"	"	"	"	"	"	"	"
C-456D-305-120	9'-3"	12'-11"	18'-2"	"	17'-6"	27'-4"	52½"	26"	95"	77¼"	70"	"	9'-5½"	"	81"	"	"	8'-1"	51½"	78"	30"	37¼"
C-456D-256-120	"	"	18'-0"	"	"	"	"	"	"	75¼"	"	"	"	"	"	"	"	"	"	"	"	"
C-456D-213-120	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
C-456D-256-100	"	10'-9"	"	"	"	"	"	46¼"	"	"	"	"	7'-3½"	"	"	"	"	"	"	"	"	"

NOTE: Preferred units shown in blue are manufactured in larger quantities and are often more readily available. All other standard units are shown in black.
Do not use above dimensions for foundation. Request foundation plan.

GENERAL DIMENSIONS Continued

UNIT	A	B	C	D	E	F	G	I	J	L	M	N	R	T	U	V	W	X	AA	AB	UU	VV
C-320D-256-144	10'-0"	15'-0"	20'-4"	16"	18'-0½"	29'-1½"	44¾"	33"	110"	72½"	6'-3¾"	16"	11'-3½"	34"	92½"	48½"	43"	7'-3½"	51¾"	93"	30¾"	34¾"
C-320D-256-120	9'-3"	12'-11"	18'-0"	12"	17'-0½"	27'-4½"	"	26"	95"	75¾"	69¾"	"	9'-5½"	"	86"	"	"	7'-2"	53"	80"	"	"
C-320D-213-120	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	7'-1½"	"	"	"	"
C-320D-305-100	"	10'-9"	"	"	"	"	"	46¼"	"	"	"	"	7'-3½"	"	"	"	"	7'-2"	"	"	"	"
C-320D-256-100	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	7'-1½"	"	"	"	"
C-320D-246-86	"	9'-3"	"	"	"	"	"	60½"	"	"	"	"	69½"	"	"	"	"	"	"	"	"	"
C-320D-213-86	8'-0"	"	15'-0"	"	15'-4½"	24'-3½"	45¼"	24½"	78"	74½"	57¾"	"	6'-2½"	"	69"	"	"	"	36"	63"	"	"
C-320D-246-74	"	8'-0"	"	9"	"	"	"	35¾"	"	77¼"	"	"	59½"	"	"	"	"	"	"	"	"	"
C-228D-213-120	9'-3"	12'-11"	18'-0"	12"	16'-5½"	27'-4"	38¾"	26"	95"	75½"	69¾"	"	9'-5½"	30"	90"	"	37"	6'-6½"	53"	80"	27¾"	"
C-228D-213-100	8'-0"	10'-9"	15'-0"	"	14'-9½"	24'-3"	39½"	12"	78"	63"	57¾"	"	7'-8½"	"	72½"	"	"	"	36"	63"	"	"
C-228D-173-100	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
C-228D-246-86	9'-3"	9'-3"	18'-0"	"	16'-5½"	27'-4"	38¾"	60¾"	95"	75½"	69¾"	"	69½"	"	90"	"	"	"	53"	80"	"	"
C-228D-213-86	8'-0"	"	15'-0"	"	14'-9½"	24'-3"	39½"	24½"	78"	74½"	57¾"	"	6'-2½"	"	72½"	"	"	"	36"	63"	"	"
C-228D-200-74	"	8'-0"	"	9"	"	"	"	35¾"	"	77¼"	"	"	59½"	"	"	"	"	"	"	"	"	"
C-228D-173-74	7'-0"	"	13'-0"	"	13'-5"	22'-10½"	"	17¾"	68"	68¼"	51¾"	12"	64"	"	"	"	"	"	26"	53"	"	"
C-160D-173-100	8'-0"	10'-9"	15'-0"	12"	14'-5"	23'-2"	33¾"	12"	78"	63"	57¾"	16"	7'-8½"	26"	65¼"	46½"	32"	70½"	38¾"	65"	26¾"	34¾"
C-160D-173-86	"	9'-3"	"	"	"	"	"	24½"	"	74½"	"	"	6'-2½"	"	"	"	"	"	"	"	"	"
C-160D-200-74	"	8'-0"	"	9"	"	24'-1"	"	35¾"	"	77¼"	"	"	59½"	"	"	"	"	"	"	"	"	"
C-160D-173-74	7'-0"	"	13'-0"	"	13'-0½"	22'-8½"	"	17¼"	68"	68¼"	51¾"	12"	64"	"	"	"	"	"	29"	55"	"	"
C-160D-143-74	"	"	12'-9¾"	"	"	"	"	"	"	66¼"	"	"	"	"	"	"	"	"	"	"	"	"
C-160D-173-64	"	7'-0"	"	"	"	"	"	26½"	"	66½"	"	"	52"	"	"	"	"	69¾"	"	"	"	"
C-160D-143-64	6'-0"	"	11'-0"	"	11'-1¾"	18'-11¾"	"	18¾"	56"	53¼"	50¾"	"	62¾"	"	54¼"	"	"	"	30¼"	43"	17"	30¼"
C-114D-119-86	7'-0"	9'-3"	12'-9¾"	12"	12'-7"	21'-10½"	29¾"	15½"	68"	54"	51¾"	"	6'-7"	24"	68¼"	"	25"	66¾"	29"	55"	23"	34¾"
C-114D-143-74	"	8'-0"	"	9"	"	"	"	17¼"	"	66¼"	"	"	64"	"	"	"	"	"	"	"	"	"
C-114D-173-64	"	7'-0"	"	"	"	"	"	26¾"	"	66½"	"	"	52"	"	"	"	"	"	"	"	"	"
C-114D-143-64	6'-0"	"	11'-0"	"	10'-8¼"	18'-6¼"	"	18¾"	56"	53¼"	50¾"	"	62¾"	"	50¾"	"	"	"	30¼"	43"	13½"	30¼"
C-114D-173-54	"	6'-0"	"	"	"	"	"	20"	"	61½"	"	"	50¾"	"	"	"	"	"	"	"	"	"
C-114D-133-54	5'-4"	"	9'-8"	"	10'-0"	17'-10"	"	14¾"	50"	49¼"	46¼"	10"	51"	"	"	"	"	67¼"	24"	37"	"	"
C-57D-76-54	4'-8"	"	8'-9"	"	9'-3¾"	16'-8½"	26"	13"	46"	39"	40¾"	"	"	20"	49¼"	"	"	58¼"	20"	33"	17½"	"
C-57D-109-48	"	5'-4"	"	"	"	"	"	15¼"	"	43¾"	"	"	43"	"	"	"	"	"	"	"	"	"
C-57D-95-48	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
C-57D-89-42	4'-0"	4'-8"	8'-2½"	6½"	8'-2"	13'-8¾"	28¼"	17½"	44"	40¾"	38½"	8"	41"	"	33¾"	40½"	"	58"	18"	33¾"	"	"
C-57D-76-42	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
C-40D-76-48	"	5'-4"	"	9"	7'-9"	13'-6"	23¾"	14½"	"	35¼"	"	"	57"	17½"	28"	44¾"	20"	51"	10¾"	"	17"	21¼"
C-40D-89-42	"	4'-8"	"	6½"	"	"	"	17¾"	"	40¾"	"	"	41"	"	"	"	"	51¼"	"	"	"	"
C-40D-76-42	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
C-40D-89-36	"	4'-0"	"	"	"	"	"	15"	"	49½"	"	"	33"	"	"	"	"	"	"	"	"	"
C-25D-67-36	"	"	"	"	7'-4"	11'-7"	20¼"	13"	44"	50½"	"	"	"	13¾"	27"	26¾"	17"	47"	"	"	"	15½"
C-25D-56-36	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
C-25D-67-30	3'-0"	3'-9"	7'-0½"	"	6'-3"	10'-6"	20½"	"	36"	37½"	31"	6"	31"	"	"	28"	"	"	"	27¼"	"	"
C-25D-53-30	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"

NOTE: Preferred units shown in blue are manufactured in larger quantities and are often more readily available. All other standard units are shown in black.

Do not use above dimensions for foundation. Request foundation plan.

LUFKIN MARK II UNITORQUE PUMPING UNITS



FIGURE 18

Lufkin M-1280D-427-216 driven by a slow speed engine.

THE UNITORQUE GEOMETRY

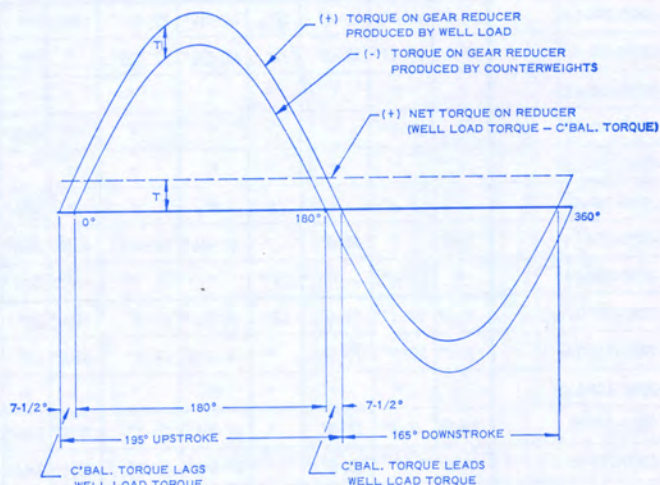


FIGURE 19

Illustration showing how a uniform torque can be obtained under ideal conditions.

NOTE: The Mark II Unit must be operated in a counter-clockwise direction. (Standing at the side of the unit with the well-head to the right.)

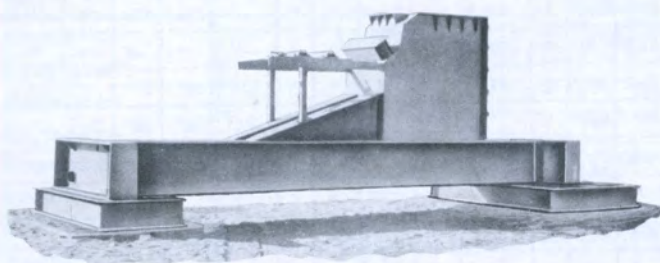


FIGURE 20

Uniset "two-point" suspension fabricated steel foundation pads are available for Mark II hi-prime electric units and where engines are mounted on the unit base.

Bottom plate on pads assures full bearing surface. Fill foundation pads with crushed rock or sand to add stabilising weight. Mark II unit base shown mounted in place.



FIGURE 21

"TWO-POINT" SUSPENSION bases are standard for all Lufkin Mark II Pumping Units. The "two point" base reduces concrete requirements approximately 80% by permitting the use of small salvageable precast concrete blocks in front and rear. This simple foundation assures a completely portable unit and foundation which requires a minimum of installation time.

(1) The cross yoke (equalizer) is shifted forward toward the horsehead instead of placing it directly over the gear reducer. This produces approximately a 195° upstroke and a 165° downstroke. (See Fig. 19)

The 195° upstroke reduces the acceleration where the load is greatest and thus effects a reduction in polished rod load.

By locating the cross yoke forward a greater mechanical advantage is obtained for lifting the load, and a lesser mechanical advantage is obtained for the reduced downstroke load, i.e., the maximum upstroke torque factor is decreased and the maximum downstroke torque factor is increased.

(2) The counterbalance weights are offset on the crank. This produces a counterbalance torque which at the beginning of the upstroke "lags" the well load torque approximately 7½°. Similarly, at the beginning of the downstroke this same offset condition produces a counterbalance torque which "leads" the well load torque approximately 7½°. (See Fig. 19)

Independently, these features would not produce a uniform torque, but working together a "unitorque" system is obtained which in turn can effect a torque reduction on the gear reducer up to 35%.

MARK II PUMPING UNIT SPECIFICATIONS

UNIT DESIGNATION	M-1280D-427-216	M-912D-305-216	M-1280D-427-192	M-912D-305-192 M-640D-305-192 M-456D-305-192	M-912D-365-168	M-912D-305-168 M-640D-305-168 M-456D-305-168
POLISHED ROD CAPACITY, LBS.	42,700	30,500	42,700	30,500	36,500	30,500
STROKE LENGTH, INCHES	216, 192, 167	216, 192, 167	192, 168, 144	192, 168, 144	168, 149, 130	168, 149, 130
WALKING BEAM	24" x 130 Lbs.	24" x 130 Lbs.	24" x 130 Lbs.	24" x 130 Lbs.	24" x 100 Lbs.	24" x 84 Lbs.
CRANK PIN BEARING	1SB	1SB	1SB	1SB	1SB	1SB
SAMSON POST BEARING	P19	P19	P19	P19	P18	P18
CROSS YOKE BEARING	C232	C232	C232	C232	C22	C22
WIRELINE HANGER	1¾" x 16" Ctrs.	1¾" x 16" Ctrs.	1¾" x 16" Ctrs.	1¾" x 16" Ctrs.	1¾" x 12" Ctrs.	1¼" x 12" Ctrs.
CRANKS	216130 MRO	216130 MRO	192130 MRO	192130 MRO	168108 MRO	168108 MRO

UNIT DESIGNATION	M-912D-365-144 M-640D-365-144 M-456D-365-144	M-912D-305-144 M-640D-305-144 M-456D-305-144	M-640D-256-144 M-456D-256-144 M-320D-256-144	M-456D-365-120	M-640D-305-120 M-456D-305-120 M-320D-305-120	M-456D-256-120 M-320D-256-120 M-228D-256-120
POLISHED ROD CAPACITY, LBS.	36,500	30,500	25,600	36,500	30,500	25,600
STROKE LENGTH, INCHES	144, 128, 112	144, 128, 112	144, 128, 112	120, 104, 88	120, 104, 88	120, 104, 88
WALKING BEAM	24" x 84 Lbs.	24" x 84 Lbs.	21" x 68 Lbs.	24" x 84 Lbs.	24" x 84 Lbs.	21" x 68 Lbs.
CRANK PIN BEARING	1SB	2SB	2SB	1SB	2SB	2SB
SAMSON POST BEARING	P18	P18	P18	P18	P18	P18
CROSS YOKE BEARING	C232	C22	C22	C232	C22	C22(M-228D,C20)
WIRELINE HANGER	1¾" x 12" Ctrs.	1¼" x 12" Ctrs.	1½" x 9" Ctrs.	1¾" x 12" Ctrs.	1¼" x 12" Ctrs.	1½" x 9" Ctrs.
CRANKS	144108 MRO	144108 MRO	144108 MRO	120108 MR	120108 MR	120108 MR

UNIT DESIGNATION	M-320D-213-120 M-228D-213-120	M-320D-305-100	M-320D-256-100 M-228D-256-100	M-228D-173-100	M-228D-246-86	M-228D-213-86 M-160D-213-86
POLISHED ROD CAPACITY, LBS.	21,300	30,500	25,600	17,300	24,600	21,300
STROKE LENGTH, INCHES	120, 104, 88	100, 84, 68	100, 84, 68	100, 84, 68	86, 72.4, 58.6	86, 72.4, 58.6
WALKING BEAM	21" x 62 Lbs.	24" x 84 Lbs.	21" x 68 Lbs.	16" x 58 Lbs.	16" x 58 Lbs.	16" x 45 Lbs.
CRANK PIN BEARING	2SB	2SB	2SB	2SB	2SB	2SB
SAMSON POST BEARING	P18(M-228D,P16)	P18	P18	P16	P16	P16
CROSS YOKE BEARING	C22(M-228D,C19)	C22	C22(M-228D,C20)	C19	C20N	C20N
WIRELINE HANGER	1½" x 9" Ctrs.	1¼" x 12" Ctrs.	1½" x 9" Ctrs.	1½" x 9" Ctrs.	1½" x 9" Ctrs.	1" x 9" Ctrs.
CRANKS	120108 MR	100108 MR	100108 MR	100108 MR	8686 MR	8686 MR

UNIT DESIGNATION	M-160D-173-86	M-114D-143-86	M-228D-200-74 M-160D-200-74	M-228D-173-74 M-160D-173-74 M-114D-173-74	M-114D-143-74	M-114D-173-64	M-114D-143-64
POLISHED ROD CAPACITY, LBS.	17,300	14,300	20,000	17,300	14,300	17,300	14,300
STROKE LENGTH, INCHES	86, 72.4, 58.6	86, 74, 62	74, 60.4, 46.8	74, 60.4, 46.8	74, 60, 46	64, 52, 40	64, 52, 40
WALKING BEAM	16" x 40 Lbs.	14" x 30 Lbs.	16" x 45 Lbs.	16" x 40 Lbs.	14" x 30 Lbs.	14" x 34 Lbs.	14" x 30 Lbs.
CRANK PIN BEARING	2SB	4SB	2SB	2SB(M-114D,3SB)	4SB	3SB	4SB
SAMSON POST BEARING	P13	P13	P16	P13	P13	P13	P13
CROSS YOKE BEARING	C18N	C18N	C20N	C18N	C18N	C18N	C18N
WIRELINE HANGER	1" x 9" Ctrs.	1" x 9" Ctrs.	1" x 9" Ctrs.	1" x 9" Ctrs.	1" x 9" Ctrs.	1" x 9" Ctrs.	1" x 9" Ctrs.
CRANKS	8686 MR	8662 MR	7486 MR	7486 MR	7462 MR	6462 MR	6462 MR

NOTE: Preferred units shown in blue are manufactured in larger quantities and are often more readily available. All other standard units are shown in black.

**MARK II PUMPING UNIT ASSEMBLIES
GENERAL DIMENSIONS**

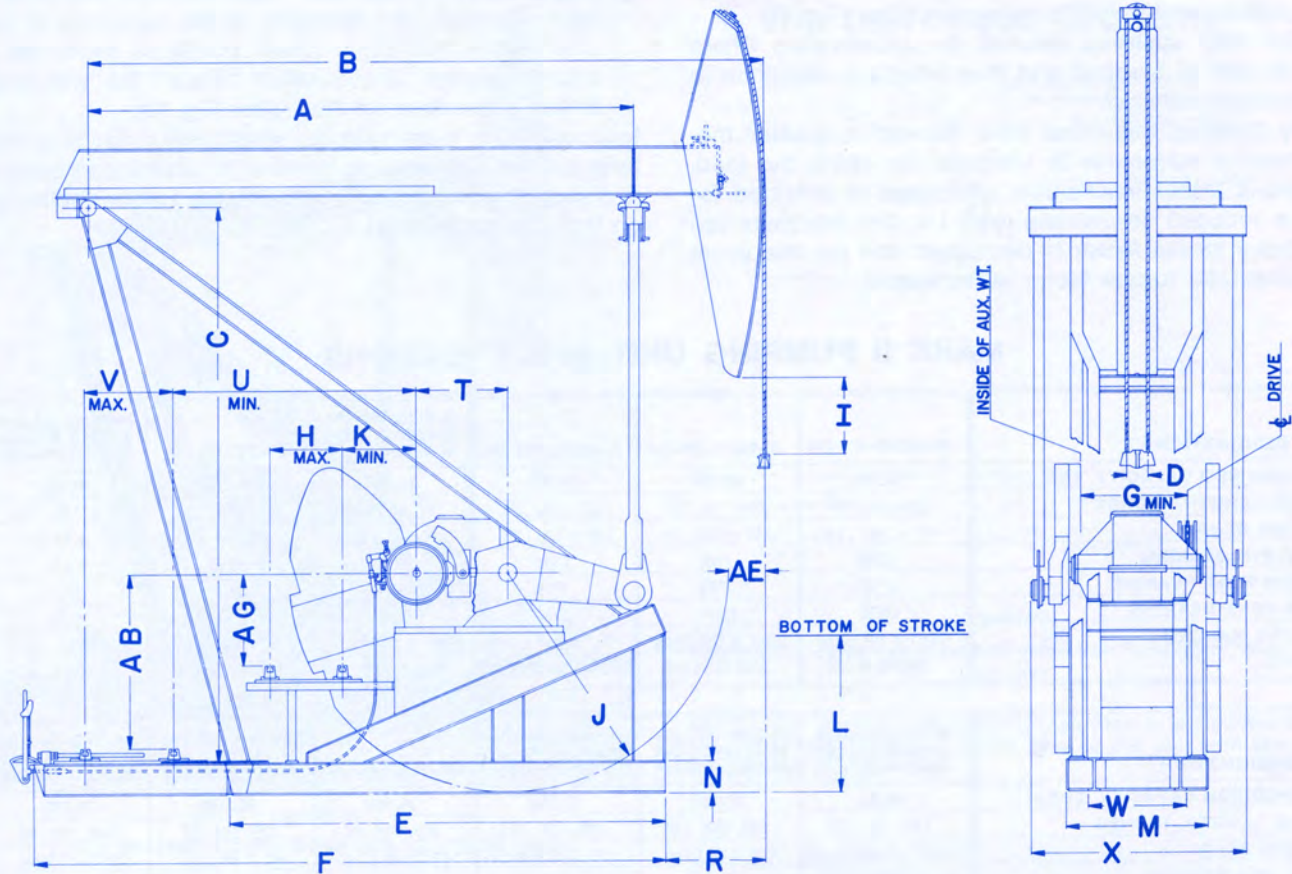


FIGURE 22

UNIT	A	B	C	D	E	F	G	H	I	J	K	L	M	N	R	T	U	V	W	X	AB	AE	AG
M-1280D-427-216	25'-6"	32'-0"	27'-5 7/8"	16"	18'-7"	25'-2 1/2"	57 3/8"	55"	47 1/4"	130"	31 3/4"	68 3/8"	8'-0"	18"	45"	52 1/2"	11'-3 1/4"	48 1/2"	48 1/2"	9'-6"	9'-6"	26"	51"
M-1280D-427-192	"	"	"	"	"	"	"	"	72 1/2"	"	"	71 1/4"	"	"	"	"	"	"	"	"	"	"	"
M-912D-305-216	"	"	"	"	"	"	54"	51 1/4"	47 1/4"	"	23"	68 3/8"	"	"	"	48 1/2"	"	"	"	9'-1"	"	"	59 1/2"
M-912D-305-192	"	"	"	"	"	"	"	"	72 1/2"	"	"	71 1/4"	"	"	"	"	"	"	"	"	"	"	"
M-912D-365-168	22'-6"	27'-10"	23'-0 3/8"	12"	18'-2 3/4"	24'-10 1/4"	"	46 3/4"	42 3/4"	108"	25 1/2"	71 1/2"	6'-9 1/2"	16"	48"	"	9'-2"	"	50"	8'-9"	7'-8"	19"	46 1/2"
M-912D-305-168	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
M-912D-365-144	21'-6"	26'-0"	21'-0 3/8"	"	"	"	"	"	40"	"	"	75 1/2"	"	"	42 1/2"	"	"	"	"	"	"	13 1/2"	"
M-912D-305-144	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	8'-7 3/8"	"	"	"
M-640D-305-192	25'-6"	32'-0"	27'-5 7/8"	16"	18'-7"	25'-2 1/2"	50 1/4"	51 1/4"	72 1/2"	130"	26 3/8"	71 1/4"	8'-0"	18"	45"	41 1/2"	11'-3 1/4"	"	48 1/2"	8'-9"	9'-6"	26"	60 1/2"
M-640D-305-168	22'-6"	27'-10"	23'-0 3/8"	12"	18'-2 3/4"	24'-10 1/4"	"	46 3/4"	42 3/4"	108"	27 3/8"	71 1/2"	6'-9 1/2"	16"	48"	"	9'-2"	"	50"	8'-5"	7'-8"	23 3/8"	46 1/2"
M-640D-365-144	21'-6"	26'-0"	21'-0 3/8"	"	"	"	"	"	40"	"	"	75 1/2"	"	"	42 1/2"	"	"	"	"	"	"	18"	"
M-640D-305-144	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	8'-3 3/8"	"	"	"
M-640D-256-144	"	"	"	9"	"	"	"	"	44 1/4"	"	"	71 1/2"	"	"	"	"	"	"	"	"	"	"	"
M-640D-305-120	"	"	"	12"	"	"	"	"	64 3/4"	"	"	75 1/2"	"	"	"	"	"	"	"	"	"	"	"
M-456D-305-192	25'-6"	32'-0"	27'-5 7/8"	16"	18'-7"	25'-2 1/2"	"	51 1/4"	72 1/2"	130"	29 3/4"	71 1/4"	8'-0"	18"	45"	38 3/8"	11'-3 1/4"	"	48 1/2"	8'-9"	9'-6"	26"	60 1/2"
M-456D-305-168	22'-6"	27'-10"	23'-0 3/8"	12"	18'-2 3/4"	24'-10 1/4"	"	46 3/4"	42 3/4"	108"	31"	71 1/2"	6'-9 1/2"	16"	48"	"	9'-2"	"	50"	8'-5"	7'-8"	23 3/8"	46 1/2"
M-456D-365-144	21'-6"	26'-0"	21'-0 3/8"	"	"	"	"	"	40"	"	"	75 1/2"	"	"	42 1/2"	"	"	"	"	"	"	18"	"
M-456D-305-144	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	8'-3 3/8"	"	"	"
M-456D-256-144	"	"	"	9"	"	"	"	"	44 1/4"	"	"	71 1/2"	"	"	"	"	"	"	"	"	"	"	"
M-456D-256-120	"	"	"	12"	"	"	"	"	64 3/4"	"	"	75 1/2"	"	"	"	"	"	"	"	"	"	"	"
M-456D-305-120	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	8'-5"	"	"	"
M-456D-256-120	"	"	"	9"	"	"	"	"	69"	"	"	71 1/2"	"	"	"	"	"	"	"	8'-3 1/2"	"	"	"

NOTE: Preferred units shown in blue are manufactured in larger quantities and are often more readily available. All other standard units are shown in black.
Do not use above dimensions for foundation. Request foundation plan.

**MARK II PUMPING UNIT ASSEMBLIES
GENERAL DIMENSIONS**

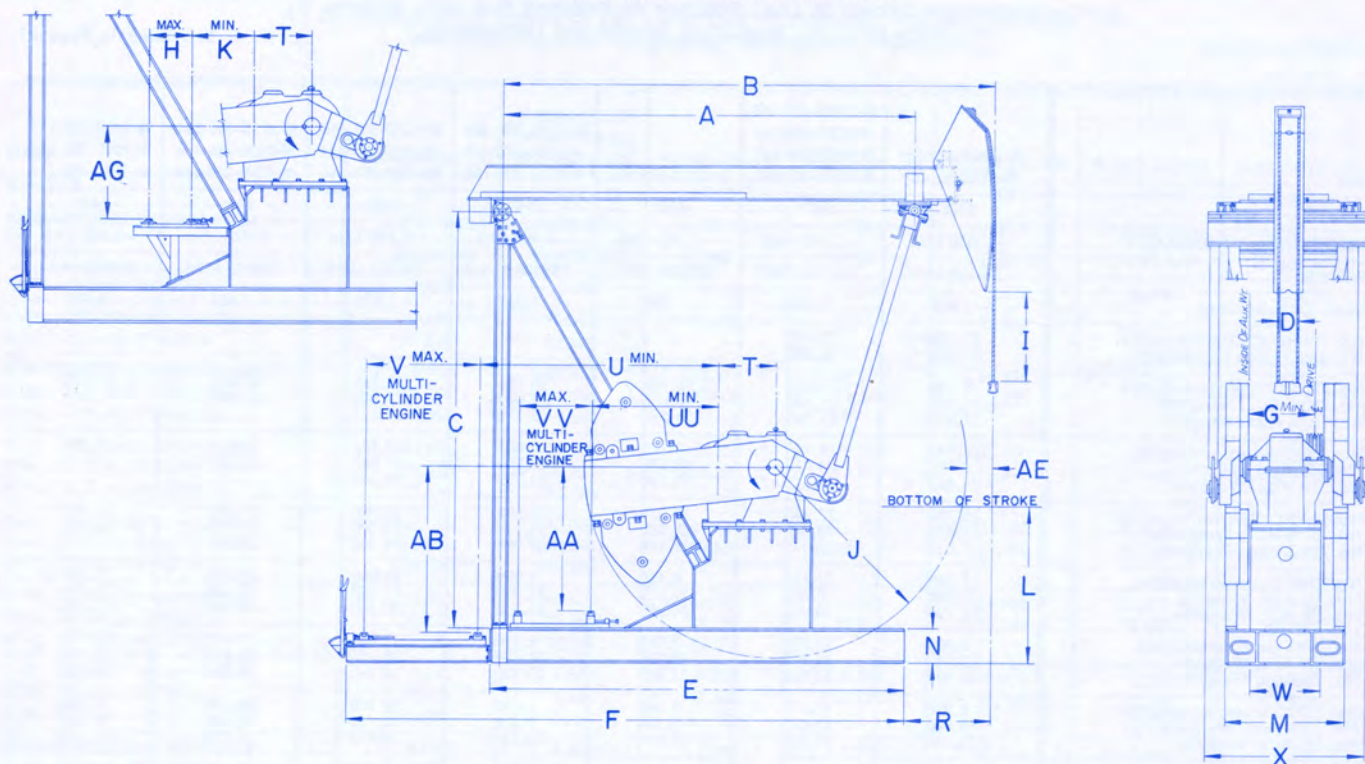


FIGURE 23

UNIT	A	B	C	D	E	F	G	H	I	J	K	L	M	N	R	T	U	V	W	X	AA	AB	AE	AG	UU	VV
M-320D-256-144	21'-6"	26'-0"	21'-0 3/4"	9"	21'-3 1/2"	29'-2"	44 1/2"	33 3/4"	44 1/4"	108"	35 3/4"	79 3/4"	69 3/4"	24"	60"	34"	9'-4 3/8"	68 1/2"	43 1/2"	7'-4 3/8"	7'-2"	9'-0 1/8"	18"	46 1/8"	7'-4"	51 1/2"
M-320D-305-120	"	"	"	12"	"	"	"	"	64 3/4"	"	"	83 3/4"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
M-320D-256-120	"	"	"	9"	"	"	"	"	69"	"	"	79 3/4"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
M-320D-213-120	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
M-320D-305-100	"	"	"	12"	"	"	"	"	7'-1"	"	"	52 1/2"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
M-320D-256-100	"	"	"	9"	"	"	"	"	7'-5"	"	"	79 3/4"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
M-228D-256-120	"	"	"	"	"	"	38 3/4"	29 3/4"	69"	"	41 1/8"	"	"	"	"	30"	"	"	37"	6'-9 3/8"	"	"	"	47 7/8"	7'-8"	"
M-228D-213-120	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
M-228D-256-100	"	"	"	"	"	"	"	"	7'-5"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
M-228D-173-100	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
M-228D-246-86	15'-6"	18'-6"	15'-8 3/4"	"	15'-6 1/2"	21'-0"	"	30 3/4"	40 3/4"	86 3/4"	22 1/4"	75 3/4"	57"	"	39"	"	8'-7 3/4"	51 1/2"	"	6'-8 3/8"	**	6'-3"	11 3/4"	40 1/2"	**	**
M-228D-213-86	"	"	"	"	"	"	"	"	"	"	"	73 3/4"	"	"	21"	"	"	"	"	"	"	"	"	"	"	"
M-228D-200-74	"	"	"	"	"	"	"	"	"	"	"	52 1/2"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
M-228D-173-74	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
M-160D-213-86	"	"	"	"	"	"	32 3/4"	33 3/4"	40 3/4"	"	24 1/2"	72 3/4"	54"	"	"	26"	8'-11 1/4"	"	32"	6'-0 3/8"	**	"	"	38 3/4"	**	**
M-160D-173-86	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
M-160D-200-74	"	"	"	"	"	"	"	"	"	"	"	52 1/2"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
M-160D-173-74	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
M-114D-143-86	13'-6"	15'-9"	12'-3 1/2"	"	13'-0 3/4"	18'-6 1/4"	29 3/4"	30"	14 1/4"	62"	20 1/4"	55 3/4"	42 3/4"	16"	36"	24"	8'-0 1/2"	"	25"	67 3/4"	**	50"	16"	31 1/4"	**	**
M-114D-173-74	15'-6"	18'-6"	15'-8 3/4"	"	15'-6 1/2"	21'-0"	"	30 3/4"	52 1/2"	86 3/4"	28"	73 3/4"	54"	21"	39"	"	9'-1 3/4"	"	"	69"	**	6'-3"	11 3/4"	43 3/4"	**	**
M-114D-143-74	13'-6"	15'-9"	12'-3 1/2"	"	13'-0 3/4"	18'-6 1/4"	"	30"	26 1/2"	62"	20 1/4"	55 3/4"	42 3/4"	16"	36"	"	8'-0 1/2"	"	"	67 3/4"	**	50"	16"	31 1/4"	**	**
M-114D-173-64	"	"	"	"	"	"	"	"	"	"	"	70 3/4"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
M-114D-143-64	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"

* On 100", 120", 144" and 168" Stroke Units, Multi-Cylinder Engines are Mounted on Main Base Beams Forward of Samson Post. See Dimensions UU, VV, and AA.
 ** On 64", 74", 86" and 192" Stroke Units, Multi-Cylinder Engines are Mounted Behind the Samson Post. See Dimensions U, V and AB.

NOTE: Preferred units shown in blue are manufactured in larger quantities and are often more readily available. All other standard units are shown in black.
 Do not use above dimensions for foundation. Request foundation plan.

LUFKIN INDUSTRIES, INC. **LUFKIN, TEXAS**

MARK II COUNTERBALANCE DATA

All Counterbalance Shown In Lbs., Effective At Polished Rod With Weights At Maximum Position, **Including Structural Unbalance.**

See Example Page 21.

UNIT	M-1280D-427-216 M-912D-305-216	M-1280D-427-192 M-912D-305-192 M-640D-305-192 M-456D-305-192	M-912D-365-168	M-912D-305-168 M-640D-305-168 M-456D-305-168	M-912D-365-144 M-640D-365-144 M-456D-365-144	M-912D-305-144 M-640D-305-144 M-456D-305-144	M-640D-256-144 M-456D-256-144 M-320D-256-144
STROKE	216"	192"	168"	168"	144"	144"	144"
STRUCTURAL UNBALANCE	-7,450 Lbs.	-7,160 Lbs.	-5,385 Lbs.	-4,860 Lbs.	-4,680 Lbs.	-4,300 Lbs.	-4,010 Lbs.
CRANKS	216130 MRO	192130 MRO	168108 MRO	168108 MRO	144108 MRO	144108 MRO	144108 MRO
C'Bal., Cranks Only	1,930	3,415	490	1,015	3,130	3,515	3,805
4 No. 130RO Counterweights	21,775	25,010
4 No. 130D Counterweights	32,785	36,995
4 No. OORO Counterweights	18,140	21,060	16,140	16,665	21,835	22,220	22,510
4 No. OOS Aux. Weights	23,030	26,380	20,860	21,390	27,480	27,865
8 No. OOS Aux. Weights	27,920	31,705	25,585	26,110	33,125
4 No. ORO Counterweights	16,070	18,805	14,140	14,665	19,450	19,830	20,120
4 No. OS Aux. Weights	20,765	23,915	18,675	19,200	24,865	25,250
8 No. OS Aux. Weights	25,460	29,025	23,210	23,735	30,285
4 No. OARO Counterweights	13,720	16,245	12,025	12,550	16,920	17,300	17,590
4 No. OAS Aux. Weights	17,370	20,220	15,600	16,125	21,190	21,570	21,860
8 No. OAS Aux. Weights	21,020	24,195	19,170	19,095	25,460	25,840
4 No. 1RO Counterweights	11,080	13,375	9,465	9,990	13,860	14,245	14,530
4 No. 1S Aux. Weights	13,890	16,435	12,225	12,750	17,160	17,540	17,830
8 No. 1S Aux. Weights	16,705	19,500	14,985	15,510	20,460	20,840	*21,130
4 No. 2RO Counterweights	9,525	11,680	7,960	8,485	12,055	12,440	12,730
4 No. 2S Aux. Weights	12,245	14,645	10,635	11,160	15,255	15,640	15,930
8 No. 2S Aux. Weights	14,970	17,605	13,310	13,835	18,455	18,840	*19,125
4 No. 3CRO Counterweights	8,000	10,025	6,505	7,030	10,320	10,705	10,990
4 No. 3BS Aux. Weights	10,620	12,875	9,100	9,620	13,420	13,800	14,090
8 No. 3S Aux. Weights	13,240	15,725	11,695	12,210	16,520	16,895	*17,190
4 No. 5ARO Counterweights	6,285	8,160	4,850	5,375	8,345	8,725	9,015
4 No. 5A Aux. Weights	8,040	10,070	6,110	7,135	10,450	10,830	11,120
8 No. 5A Aux. Weights	9,795	11,980	7,370	8,895	12,555	12,935	*13,225
4 No. 5CRO Counterweights	5,120	6,890	3,695	4,220	6,960	7,345	7,635
4 No. 5C Aux. Weights	6,700	8,610	5,280	5,805	8,855	9,240	9,525
8 No. 5C Aux. Weights	8,280	10,325	6,860	7,385	10,745	11,125	*11,415
4 No. 6RO Counterweights	4,390	6,106	2,970	3,495	6,095	6,480	6,770
4 No. 6 Aux. Weights	5,320	7,110	3,905	4,430	7,215	7,600	7,890
8 No. 6 Aux. Weights	6,250	8,115	4,840	5,365	8,335	8,720	9,010
4 No. 7RO Counterweights	3,490	5,115	2,065	2,590	5,015	5,400	5,690
4 No. 7 Aux. Weights	4,190	5,880	2,775	3,300	5,865	6,250	6,540
8 No. 7 Aux. Weights	4,890	6,645	3,485	4,010	6,715	7,100	7,390

UNIT	M-320D-305-100	M-320D-256-100	M-228D-256-100	M-228D-173-100	M-228D-246-86	M-228D-213-86 M-160D-213-86	M-160D-173-86	M-114D-143-86
STROKE	100"	100"	100"	100"	86"	86"	86"	86"
STRUCTURAL UNBALANCE	-3,700 Lbs.	-3,470 Lbs.	-3,285 Lbs.	-3,175 Lbs.	-2,140 Lbs.	-2,040 Lbs.	-1,930 Lbs.	-1,535 Lbs.
CRANKS	100108 MR	100108 MR	100108 MR	100108 MR	8686 MR	8686 MR	8686 MR	8662 MR
C'Bal., Cranks Only	4,710	4,940	5,152	5,235	2,740	2,840	2,960	1,535
4 No. 1RO Counterweights	19,580	19,810	19,995	20,105	15,700	15,800	15,930	9,560
4 No. 1S Aux. Weights	24,155	24,385	24,569	24,680	19,685	19,785	19,920	13,420
4 No. 2RO Counterweights	17,085	17,315	17,500	17,610	13,565	13,665	13,795	8,300
4 No. 2S Aux. Weights	21,515	21,745	21,930	22,140	17,445	17,545	17,680	10,725
4 No. 3CRO Counterweights	14,675	14,905	15,090	16,000	11,570	11,670	11,795	7,220
4 No. 3BS Aux. Weights	18,970	19,200	19,385	19,495	15,375	15,475	15,605	9,675
4 No. 5ARO Counterweights	11,935	12,165	12,350	12,460	9,255	9,355	9,480	5,900
4 No. 5AS Aux. Weights	14,855	15,085	15,270	15,380	11,890	11,990	12,120	7,675
4 No. 5CRO Counterweights	10,020	10,250	10,435	10,535	7,545	7,645	7,770	4,785
4 No. 5CS Aux. Weights	12,645	12,875	13,060	13,170	9,925	10,025	10,150	6,395
4 No. 6RO Counterweights	8,820	9,050	9,235	9,345	6,480	6,580	6,705	4,095
4 No. 6 Aux. Weights	10,375	10,605	10,790	10,900	7,895	7,995	8,120	5,060
8 No. 6 Aux. Weights	11,930	12,160	12,345	12,455	9,310	6,025
4 No. 7RO Counterweights	7,325	7,555	7,740	7,850	5,135	5,235	5,355	3,190
4 No. 7 Aux. Weights	8,500	8,730	8,915	9,025	6,210	6,310	6,430	3,940
8 No. 7 Aux. Weights	9,675	9,905	10,090	10,200	7,285	4,690

*8 Type S Aux. Weights will not clear Belt Cover on M-320D unit.

NOTE: Preferred units shown in blue are manufactured in larger quantities and are often more readily available. All other standard units are shown in black.

MARK II COUNTERBALANCE DATA

All Counterbalance Shown In Lbs., Effective At Polished Rod With Weights At Maximum Position, **Including Structural Unbalance.**

See Example below.

UNIT	M-456D-365-120	M-640D-305-120 M-456D-305-120 M-320D-305-120	M-456D-256-120	M-320D-256-120	M-228D-256-120	M-320D-213-120	M-228D-213-120
STROKE	120"	120"	120"	120"	120"	120"	120"
STRUCTURAL UNBALANCE	-4,510 Lbs.	-4,130 Lbs.	-3,840 Lbs.	-3,620 Lbs.	-3,435 Lbs.	-3,560 Lbs.	-3,235 Lbs.
CRANKS	120108 MR	120108 MR	120108 MR	120108 MR	120108 MR	120108 MR	120108 MR
C'Bal. Cranks Only	2,020	2,410	2,700	2,920	3,105	2,980	3,305
4 No. ORO Counterweights	21,200	21,595	21,885	22,105	22,285
4 No. OS Aux. Weights	27,570	27,965
4 No. OARO Counterweights	18,230	18,620	18,910	19,130	19,315	19,190	19,515
4 No. OAS Aux. Weights	23,245	23,640	23,930	24,150	24,335
8 No. OAS Aux. Weights	28,265	*28,660
4 No. 1RO Counterweights	14,630	15,025	15,315	15,535	15,720	15,595	15,920
4 No. 1S Aux. Weights	18,510	18,905	19,195	19,410	19,595	19,470	19,795
8 No. 1S Aux. Weights	22,390	*22,780	23,070
4 No. 2RO Counterweights	12,515	12,905	13,195	13,415	13,600	13,475	13,800
4 No. 2S Aux. Weights	16,275	16,665	16,955	17,175	17,360	17,235	17,560
8 No. 2S Aux. Weights	20,035	*20,425	20,715
4 No. 3CRO Counterweights	10,470	10,865	11,155	11,375	11,560	11,435	11,760
4 No. 3BS Aux. Weights	14,115	14,505	14,795	15,015	15,200	15,075	15,400
8 No. 3S Aux. Weights	17,760	*18,145	18,435
4 No. 5ARO Counterweights	8,145	8,540	8,830	9,050	9,235	9,110	9,435
4 No. 5A Aux. Weights	10,620	11,015	11,305	11,525	11,710	11,585	11,910
8 No. 5A Aux. Weights	13,095	*13,490	13,780
4 No. 5CRO Counterweights	6,520	6,915	7,205	7,425	7,610	7,485	7,810
4 No. 5C Aux. Weights	8,750	9,140	9,430	9,650	9,835	9,710	10,035
8 No. 5C Aux. Weights	10,970	*11,360	11,650
4 No. 6RO Counterweights	5,505	5,900	6,190	6,410	6,595	6,470	6,790
4 No. 6 Aux. Weights	6,820	7,215	7,505	7,725	7,910	7,785	8,110
8 No. 6 Aux. Weights	8,135	8,530	8,820	9,040	9,225	9,100	9,430
4 No. 7RO Counterweights	4,235	4,630	4,920	5,140	5,325	5,200	5,525
4 No. 7 Aux. Weights	5,235	5,625	5,915	6,135	6,320	6,195	6,520
8 No. 7 Aux. Weights	6,235	6,620	6,910	7,130	7,315	7,190	7,515

*8 Type S Aux. Weights will not clear Belt Cover on M-320D Unit.

UNIT	M-228D-200-74	M-160D-200-74	M-228D-173-74 M-160D-173-74	M-114D-173-74	M-114D-143-74	M-114D-173-64 M-114D-143-64
STROKE	74"	74"	74"	74"	74"	64"
STRUCTURAL UNBALANCE	-1,960 Lbs.	-1,890 Lbs.	-1,860 Lbs.	-1,820 Lbs.	-1,440 Lbs.	-1,420 Lbs.
CRANKS	7486 MR	7486 MR	7486 MR	7486 MR	7462 MR	6462 MR
C'Bal., Cranks Only	3,705	3,775	3,805	3,880	2,245	2,855
4 No. 2RO Counterweights	16,085	16,155	16,185	16,305	9,935	11,620
4 No. 2S Aux. Weights	12,690	14,760
4 No. 3CRO Counterweights	13,805	13,875	13,905	14,015	8,710	10,225
4 No. 3BS Aux. Weights	18,155	18,225	18,255	18,385	11,495	13,400
4 No. 5ARO Counterweights	11,155	11,225	11,255	11,355	7,205	8,515
4 No. 5AS Aux. Weights	14,165	14,235	14,265	14,380	9,225	10,815
4 No. 5CRO Counterweights	9,200	9,270	9,300	9,395	5,940	7,070
4 No. 5CS Aux. Weights	11,920	11,940	12,020	12,125	7,770	9,155
4 No. 6RO Counterweights	7,985	8,055	8,085	8,175	5,155	6,175
4 No. 6 Aux. Weights	9,595	9,665	9,695	9,795	6,255	7,425
8 No. 6 Aux. Weights	11,205	11,415	7,355	8,675
4 No. 7RO Counterweights	6,440	6,510	6,540	6,625	4,125	5,005
4 No. 7 Aux. Weights	7,670	7,740	7,770	7,860	4,975	5,970
8 No. 7 Aux. Weights	8,900	9,095	5,825	6,935

EXAMPLE:

A M-456D-305-144 with 4 No. ORO Counterweights and 4 No. OS Auxiliary Weights would have a maximum counterbalance effect of 25,250 lbs. in the 144" stroke. (See other examples, pages 12 and 13.)

Structural Unbalance with a negative (-) sign indicates a walking beam assembly that is heavy on the well end.

NOTE: Preferred units shown in blue are manufactured in larger quantities and are often more readily available. All other standard units are shown in black.

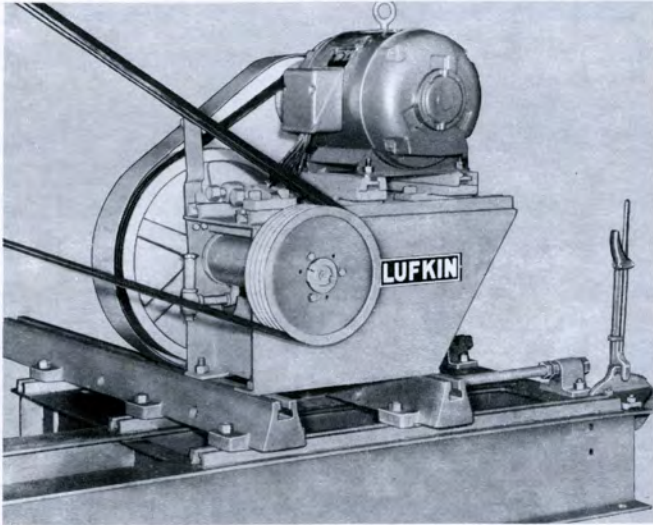


FIGURE 24

This assembly utilizes an electric motor and counter-shaft and provides a reduction ratio up to 4:1. This compact reduction unit package will fit on conventional slide rails and was designed for use with single reduction gear reducers where slow pumping speeds are encountered. This type assembly is manufactured in two sizes:

- No. 1—25-50 HP
- No. 2—up to 20 HP

FOUNDATION ANCHOR NUTS

Suspended in concrete forms before foundation is poured.

Provides flush foundation. Wide foot at base of nut insures more than adequate holding power.

Available in the following sizes:

BOLT DIA.	Length
3/4".....	6"
1".....	10"
1 1/4".....	12"
1 1/2".....	12"



FIGURE 25

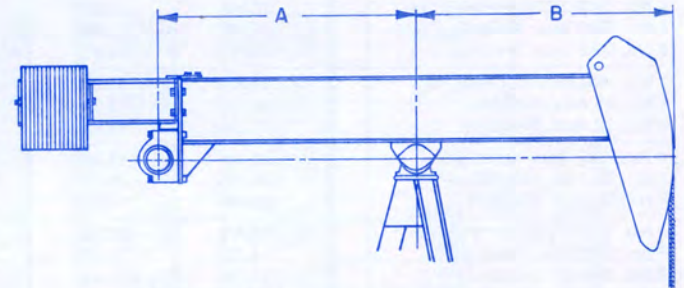


FIGURE 26

BEAM EXTENSIONS FOR EXTRA COUNTERBALANCE

These extensions are available for older units as well as current units. They are made in two sizes and can be adapted to crank balanced units now in service by burning 8 holes in the walking beam.

Extension	Max. Weight Added, Lbs.	Distance from Equalizer Bearing to Center of Weights	Max. Counterbalance Added, Lbs.*
48".....	2600	28"	$2600(A+28") \div B$
60".....	4000	40"	$4000(A+40") \div B$

* For the A and B dimensions refer to the General Dimensions Sheet of the particular unit in question.

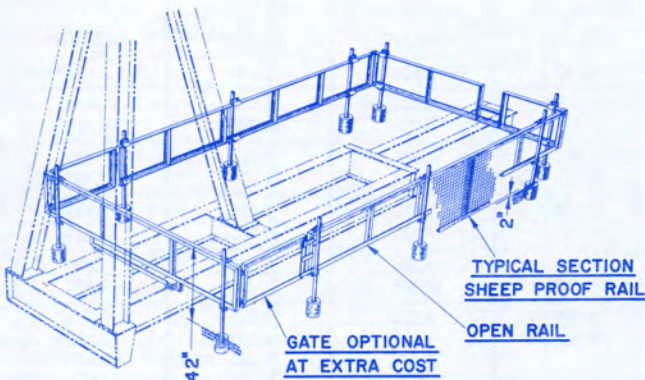


FIGURE 27

RAIL TYPE CRANK GUARDS

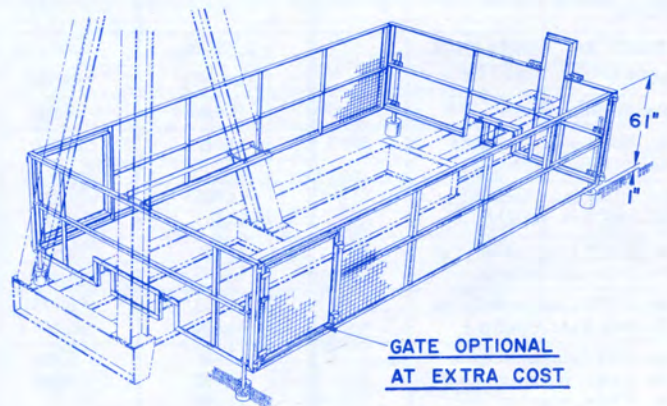


FIGURE 28

TYPE W SHEEP PROOF CRANK GUARDS

Open rail type and sheep proof crank guards are available from stock for all Lufkin Units. No holes required in Base or Post—clamps to top flange of Base and to Post—and can be fitted to any Lufkin unit. Sides are hinged and can be easily removed. Sheep Proof guards are 2 x 2 wire mesh with angle rails.

LUFKIN AIR BALANCED PUMPING UNITS

1. Perfect counterbalance with finger-tip control.
2. Lower installation cost.
3. Compact and portable; ideal for well testing.
4. Small size and lighter weight make it ideal for export.
5. Stroke lengths to 25 feet for high volume production from great depths.

These are some of the outstanding advantages of LUFKIN AIR BALANCED PUMPING UNITS. These units employ compressed air to counterbalance the well load rather than beam weights or crank weights. The air system has been so simplified that the only continuously operating parts are the balance cylinder and piston. The reservoir capacity of the cylinder is enlarged by a steel receiver which moves with the cylinder as a unit.

On engine-driven units, when the system is in need of air, an automatic regulator engages an air operated clutch (driven by one belt from the unit sheave) and replaces any lost air. The operator sets regulator, initially, at a pressure sufficient to counterbalance well load, and this pressure is maintained automatically. Should the load change appreciably, a slight adjustment of this regulator will restore perfect counterbalance.

A safety shut-off switch is available, which will ground out engine, or shut off motor, if pressure should exceed a preset figure or fall below a minimum pre-set figure.

For units pumping with electricity, a separate motor-driven compressor assembly is standard equipment.

Since the Lufkin Air Balanced Units are approximately 35% shorter and 40% lighter than crank-type units, they are ideal for use as portable or test units, and for installation on piling or superstructures. Since changing counterbalance effect is a matter of adjusting a valve, the air balanced unit is ideal for use in testing wells.

All the ruggedness and simplicity of the conventional Lufkin Pumping Units are incorporated in the design of the Lufkin Air Balanced Pumping Unit.

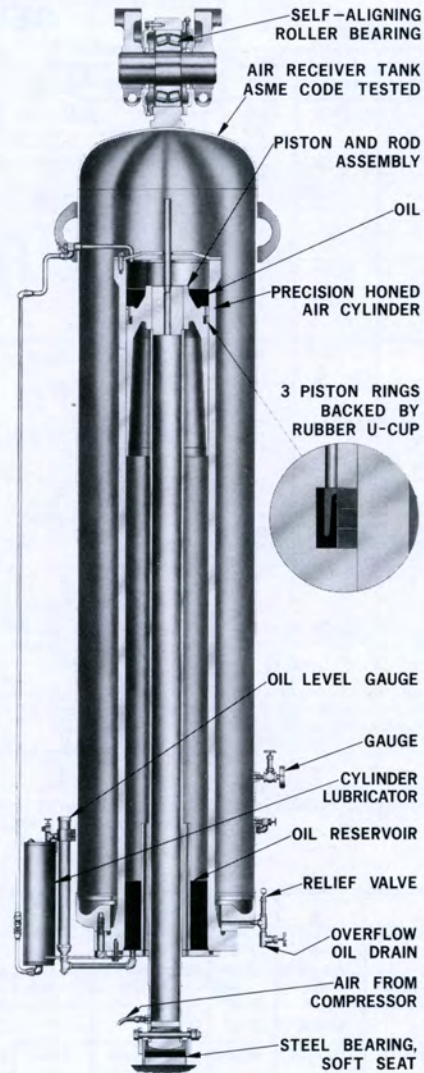


FIGURE 29



FIGURE 30

Mobile A-456D-365-120 Air Balanced Unit, Multi-Cylinder Engine Drive. This trailer-mounted unit with prime mover and diesel fuel tank built integral is ideal for test purposes.



FIGURE 31

A-456D-305-144 Air Balanced Unit, Electric Motor Drive.

**LUFKIN AIR BALANCED PUMPING UNITS
GENERAL DIMENSIONS**

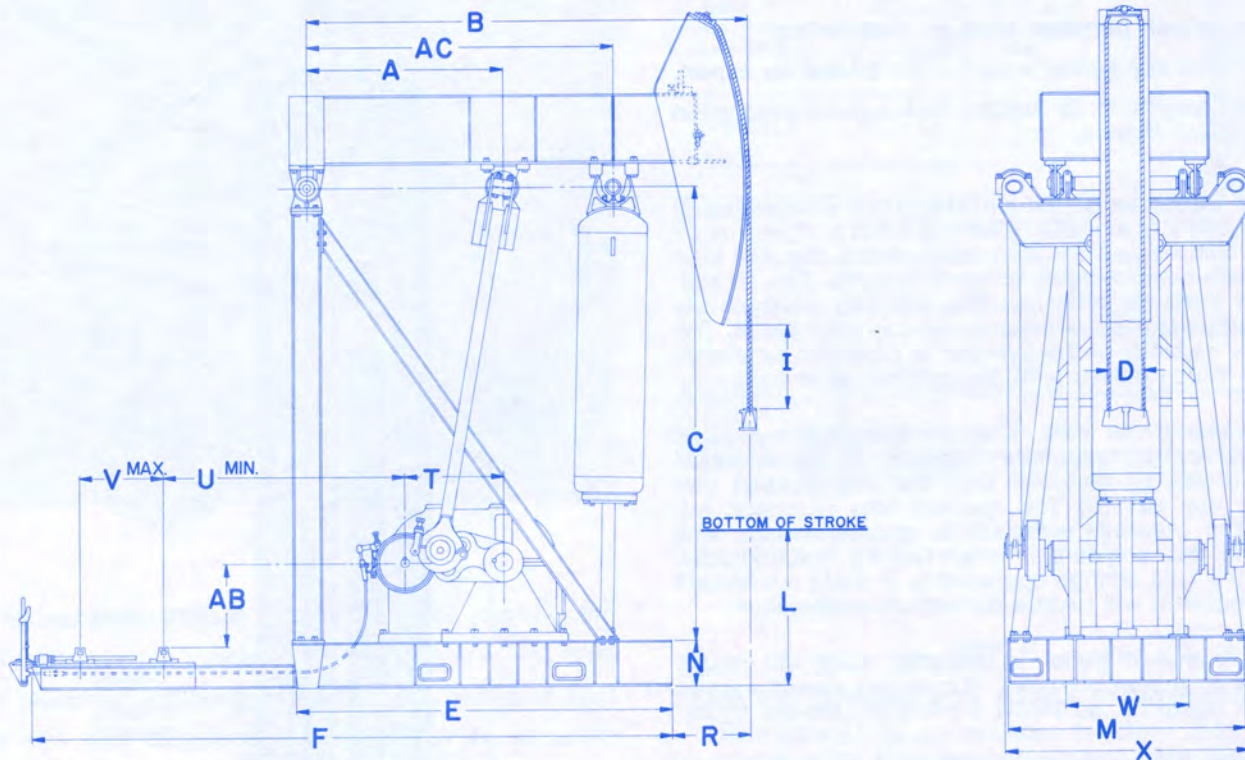


FIGURE 32

UNIT	A	B	C	D	E	F	I	L	M	N	R	T	U	V	W	X	AB	AC
A-3648D-470-300	10'-5"	28'-6"	30'-0"	16"	*	35'-6"	19½"	54"	9'-8"	24"	48"	84½"	6'-1½"	44¾"	70¼"	11'-4½"	42"	17'-2"
A-3648D-470-240	11'-2½"	28'-0"	25'-3½"	"	*	32'-0"	16½"	56"	9'-6"	21"	"	"	6'-11½"	"	"	"	"	19'-5½"
A-2560D-470-300	10'-5"	28'-6"	30'-0"	"	*	35'-6"	19½"	54"	9'-8"	24"	"	70"	"	"	66¾"	11'-0½"	"	17'-2"
A-2560D-470-240	11'-2½"	28'-0"	25'-3½"	"	*	32'-0"	16"	57½"	8'-10"	21"	"	"	7'-9½"	"	"	10'-10½"	36"	19'-5½"
A-1824D-470-300	10'-5"	28'-6"	30'-0"	"	*	35'-6"	19½"	54"	9'-8"	24"	"	58½"	7'-10½"	"	50¼"	9'-9½"	42"	17'-2"
A-1824D-470-240	11'-2½"	28'-0"	25'-3½"	"	*	32'-0"	16"	57½"	8'-0"	21"	"	"	8'-8½"	"	"	9'-7½"	30"	19'-5½"
A-1824D-427-192	10'-1½"	23'-0"	21'-0"	"	19'-4½"	27'-1½"	17½"	52"	7'-11½"	"	"	"	8'-1"	41"	"	"	34½"	14'-3½"
A-1280D-470-300	10'-5"	28'-6"	30'-0"	"	*	35'-6"	19½"	54"	9'-8"	24"	"	52½"	8'-5"	44¾"	"	9'-3½"	42"	17'-2"
A-1280D-470-240	11'-2½"	28'-0"	25'-3½"	"	*	32'-0"	16"	57½"	8'-0"	21"	"	"	9'-3"	"	"	9'-1½"	30"	19'-5½"
A-1280D-427-192	10'-11½"	23'-0"	21'-0"	"	19'-4½"	27'-1½"	17½"	52"	7'-11½"	"	"	"	8'-7½"	"	"	"	34½"	14'-3½"
A-1280D-305-168	7'-4"	19'-3"	20'-4"	"	14'-10½"	22'-0½"	16"	66½"	"	16½"	59"	"	6'-0"	"	"	8'-11½"	38½"	10'-11½"
A-912D-470-240	11'-2½"	28'-0"	25'-3½"	"	*	32'-0"	"	57½"	8'-10"	21"	48"	48½"	9'-7"	44¾"	50"	8'-6½"	24"	19'-5½"
A-912D-427-192	10'-1½"	23'-0"	21'-0"	"	19'-4½"	27'-1½"	17½"	52"	"	"	"	"	9'-2"	"	"	"	28½"	14'-3½"
A-912D-305-168	7'-4"	19'-3"	20'-4"	"	14'-10½"	22'-0½"	16"	66½"	"	16½"	59"	"	6'-4"	"	"	8'-4½"	32½"	10'-11½"
A-912D-427-144	"	16'-8"	17'-10"	"	12'-3½"	19'-5½"	20½"	55"	"	"	"	"	"	"	"	"	"	"
A-640D-305-168	"	19'-3"	20'-4"	"	14'-10½"	22'-0½"	16"	66½"	"	"	"	41½"	7'-0"	"	46¾"	"	30½"	"
A-640D-427-144	"	16'-8"	17'-10"	"	12'-3½"	19'-5½"	20½"	55"	"	"	"	"	"	"	"	"	"	"
A-640D-305-144	6'-5"	17'-4"	"	12"	12'-11¼"	20'-1¼"	12½"	62½"	7'-6"	"	57"	"	71½"	"	"	"	"	9'-10"
A-640D-365-120	"	14'-7"	15'-7"	"	10'-11¼"	18'-1¼"	22"	49½"	"	"	47½"	"	"	"	"	"	"	"
A-456D-305-144	"	17'-4"	17'-10"	"	12'-11¼"	20'-1¼"	12½"	62½"	"	"	57"	38½"	6'-2"	"	"	"	"	"
A-456D-365-120	"	14'-7"	15'-7"	"	10'-11¼"	18'-1¼"	22"	49½"	"	"	47½"	"	"	"	"	"	"	"
A-456D-256-120	69"	15'-4"	"	"	11'-11¼"	19'-1"	14½"	57"	7'-1½"	"	"	"	"	"	"	"	"	8'-8"
A-320D-256-120	70"	15'-7"	"	"	11'-3¼"	18'-11¼"	"	"	"	"	53"	34"	6'-6"	"	43¼"	7'-3½"	"	8'-11"
A-320D-305-100	"	"	13'-4"	"	10'-0¼"	17'-8¼"	13"	53"	"	"	39"	"	"	"	"	"	"	"
A-228D-173-100	56"	12'-7"	12'-5"	"	8'-3¼"	15'-0¼"	17"	46¾"	6'-1½"	"	36"	30"	47"	50"	37¼"	6'-8½"	29½"	7'-3½"
A-228D-246-86	"	10'-11"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"	"
A-160D-200-74	50"	10'-0"	11'-9"	"	7'-11"	14'-6¾"	16½"	51"	"	9¾"	35½"	26"	57"	43½"	32"	69¾"	22"	6'-5½"
A-114D-173-64	48"	9'-7"	11'-0"	9"	7'-5½"	14'-5¾"	15"	55½"	6¾"	"	36"	24"	64"	42"	25¼"	66¾"	13¾"	6'-0½"

* Portable Base is Standard. One Piece and Portable Bases Available on All Units.

NOTE: Preferred units shown in blue are manufactured in larger quantities and are often more readily available. All other standard units are shown in black.

Do not use above dimensions for foundation. Request foundation plan.

RATING CHART

UNIT	Polish Rod Load Class, Lbs.	Stroke Length, Inches	Piston Dia., Inches	Walking Beam Size	Wireline Hanger Dia. & Centers	*Floating Hub Sheave Sizes, P.D. Inches	Bearings			
							Crank Pin	Equalizer	Samson Post	Air Tank
A-3648D-470-300 A-3648D-470-240	47,000 "	300-240 240-200	17½ 14½	36 x 16½ @ 280#	Double 1¼" x 16"	80" (18D) "	OS OT	E44 "	P22 P19	240 334
A-2560D-470-300 A-2560D-470-240	" "	300-240 240-200	17½ 14½	36 x 16½ @ 245#	1⅜" x 16"	68" (16D) "	OS OT	E32 "	P22 P19	240 334
A-1824D-470-300 A-1824D-470-240 A-1824D-427-192	" " 42,700	300-240 240-200 192-168-144	17½ 14½ "	" " 33 x 15¾ @ 200#	Double 1¼" x 16" 1⅜" x 16"	40, 46, 51, 55, 68, (11D) "	OS OT "	E26 " "	P22 P19 "	240 334 "
A-1280D-470-300 A-1280D-470-240 A-1280D-427-192 A-1280D-305-168	47,000 " 42,700 30,500	300-240 240-200 192-168-144 168-141-118	17½ 14½ " 13	36 x 16½ @ 245# 33 x 15¾ @ 200# 27 x 14 @ 160#	Double 1¼" x 16" 1⅜" x 16" "	40, 46, 51, 55, 68, (10D) " "	OS OT " "	" " " "	P22 P19 " "	240 334 " 232
A-912D-470-240 A-912D-427-192 A-912D-305-168 A-912D-427-144	47,000 42,700 30,500 42,700	240-200 192-168-144 168-141-118 144-120-100	14½ " 13 "	36 x 16½ @ 245# 33 x 15¾ @ 200# 24 x 14 @ 145# 27 x 14 @ 160#	" " " "	28, 34, 40, 46, 51, (8D) " 28, 34, 40, 46, 51, (7D) "	OT " " "	" " " "	" " " "	334 " 232 "
A-640D-305-168 A-640D-427-144 A-640D-305-144 A-640D-365-120	30,500 42,700 30,500 36,500	168-141-118 144-120-100 " 120-100-86	" " 12 "	24 x 14 @ 145# 27 x 14 @ 160# 24 x 14 @ 130#	" " 1¼" x 12"	28, 34, 40, 46, 51, (6D) " "	" " " "	" " " P18	" " " "	" " 326 "
A-456D-305-144 A-456D-365-120 A-456D-256-120	30,500 36,500 25,600	144-120-100 120-100-86 "	" " 11	" " 24 x 12 @ 100#	" " "	28,34,40,46,51(6D or 8C) " "	" " "	" " "	" " "	" " 324
A-320D-256-120 A-320D-305-100	" 30,500	120-104-90 100-86-74	" "	" "	" "	25, 30, 36, 42, 47¼ (6C or 5D) "	2T "	E22 "	" "	" "
A-228D-173-100 A-228D-246-86	17,300 24,600	" 86-74-64	10 "	21 x 9 @ 82# "	1⅝" x 12" "	24¼, 30, 36, 41¼ (5C or 4D) "	" "	" "	P17 "	322 "
A-160D-200-74 A-114D-173-64	20,000 17,300	74-64-54 64-54	" 8	18 x 8¾ @ 77# 16 x 8½ @ 64#	" 1" x 9"	24¼, 29¼, 33¼, 38 (4C or 3D) 19¼,24,29¼,33¼, (3C)	3TA "	E19 E18	P16 "	" 318

* Standard Sheave Sizes Shown are Floating Hub Sheaves for Clutch Driven Compressors; Largest Size Shown is Maximum Available. For Electric Motor Driven Compressors, Use Solid Type Reducer Sheave as Shown in Crank Balance Unit Specifications.

COUNTERBALANCE DATA
Effective Counterbalance In Pounds Based On Average Pressure

UNIT	* Average Pressure, PSIG											
	150	175	200	225	250	275	300	325	350	375	400	410
A-3648D-470-300 A-2560D-470-300 A-1824D-470-300 A-1280D-470-300	3,045	6,665	10,290	13,910	17,535	21,155	24,780	28,400	32,025	35,645	37,000
A-3648D-470-240 A-2560D-470-240 A-1824D-470-240 A-1280D-470-240 A-912D-470-240	2,870	5,740	8,610	11,480	14,350	17,220	20,090	22,960	25,830	28,700	29,850
A-1824D-427-192 A-1280D-427-192 A-912D-427-192	3,905	6,475	9,045	11,615	14,185	16,755	19,325	21,895	24,465	27,035	29,605	30,635
A-1280D-305-168 A-912D-305-168 A-640D-305-168	2,810	4,700	6,585	8,475	10,365	12,250	14,140	16,030	17,915	19,805	21,695	22,450
A-912D-427-144 A-640D-427-144	5,240	7,420	9,605	11,785	13,970	16,150	18,335	20,515	22,700	24,880	27,065	27,935
A-640D-305-144 A-456D-305-144	3,520	5,125	6,725	8,330	9,935	11,540	13,145	14,745	16,350	17,955	19,560	20,200
A-640D-365-120 A-456D-365-120	4,725	6,630	8,535	10,440	12,345	14,250	16,155	18,060	19,965	21,870	23,775	24,535
A-456D-256-120 A-320D-256-120	4,035	5,415	6,795	8,175	9,560	10,940	12,320	13,700	15,085	16,465	17,845	18,400
A-320D-305-100	4,855	6,495	8,135	9,775	11,415	13,055	14,695	16,335	17,975	19,615	21,255	21,910
A-228D-173-100	2,925	4,060	5,195	6,335	7,470	8,610	9,745	10,885	12,020	13,160	14,295	14,750
A-228D-246-86	4,045	5,355	6,670	7,980	9,295	10,605	11,920	13,230	14,545	15,855	17,170	17,695
A-160D-200-74	4,410	5,680	6,945	8,215	9,480	10,750	12,015	13,285	14,550	15,820	17,085	17,595
A-114D-173-64	2,760	3,550	4,345	5,135	5,930	6,720	7,515	8,305	9,100	9,890	10,685	11,000

* Pressure Shown is Average Pressure Between Maximum and Minimum and Occurs at Approximately Beam Horizontal Position. For Counterbalance at Other Pressures Use Direct Interpolation.

NOTE: Preferred units shown in blue are manufactured in larger quantities and are often more readily available. All other standard units are shown in black.

LUFKIN PUMPING UNITS NOMENCLATURE

FIGURE 33
Conventional
Pumping Unit Nomenclature

Reprints Available
Request Forms
F-1079 for Conventional Pumping Unit,
F-1080 for Mark II Pumping Unit, and
F-1081 for Air Balanced Pumping Unit
Also Available in Spanish

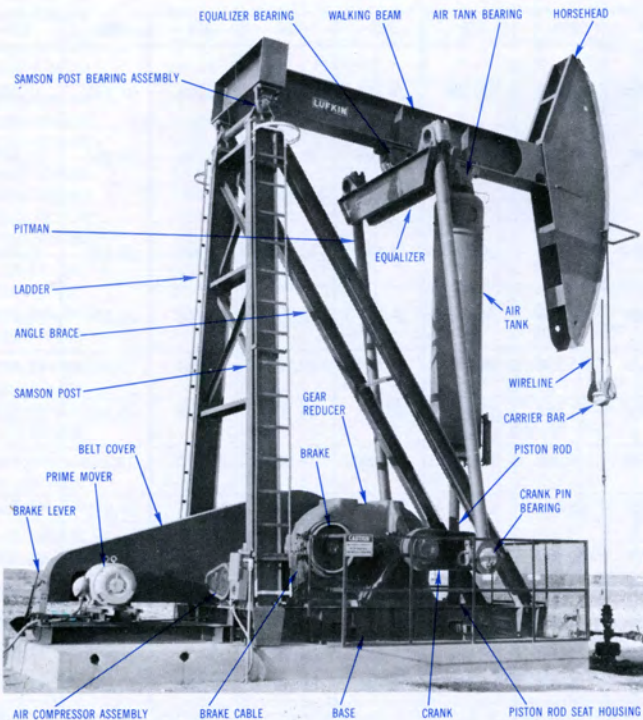
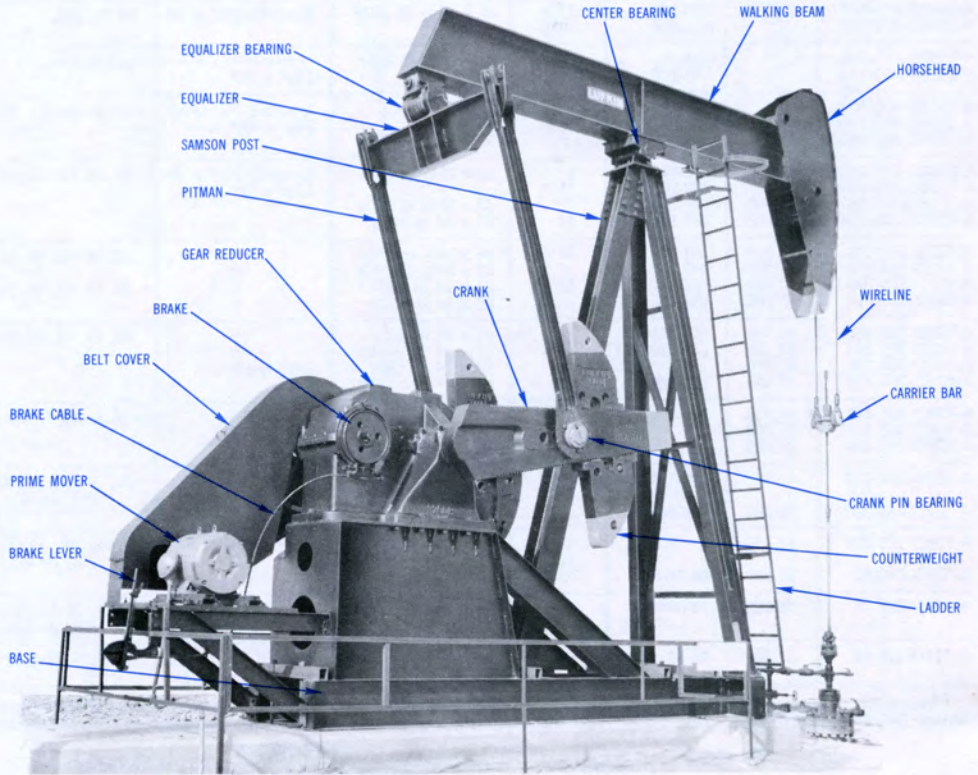


FIGURE 34
Air Balanced Pumping Unit

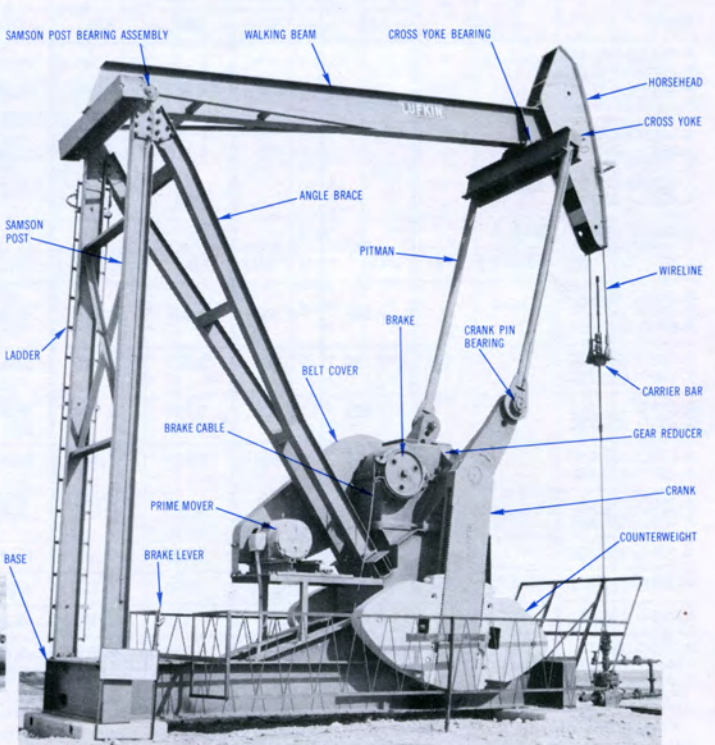


FIGURE 35
Mark II Pumping Unit

LUFKIN GEAR REDUCERS

A complete line of Single, Double and Triple Reduction Herringbone Gear Reducers, also Single and Double Reduction Speed Increasers are available.

Write for Gear Catalog G-32A and G-33A.

A complete line of Marine Gears including reduction, reverse and reduction, and multiple pinion units are available. Write for Marine Gear Bulletins G-10A, G-11A, G-30 and MG-77.

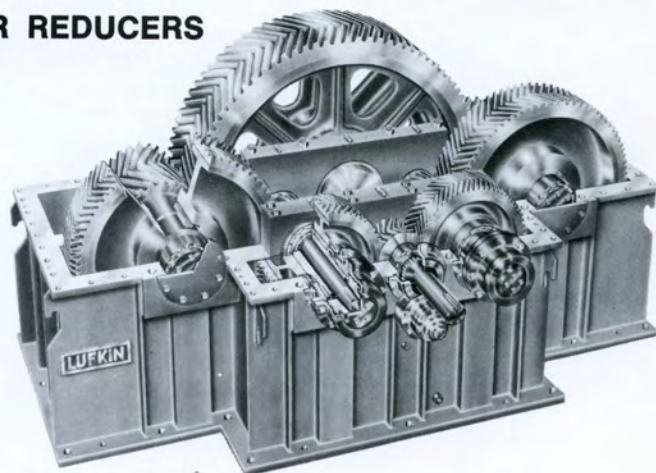


FIGURE 36
Lufkin TC4421 Triple Reduction Compound Reducers.

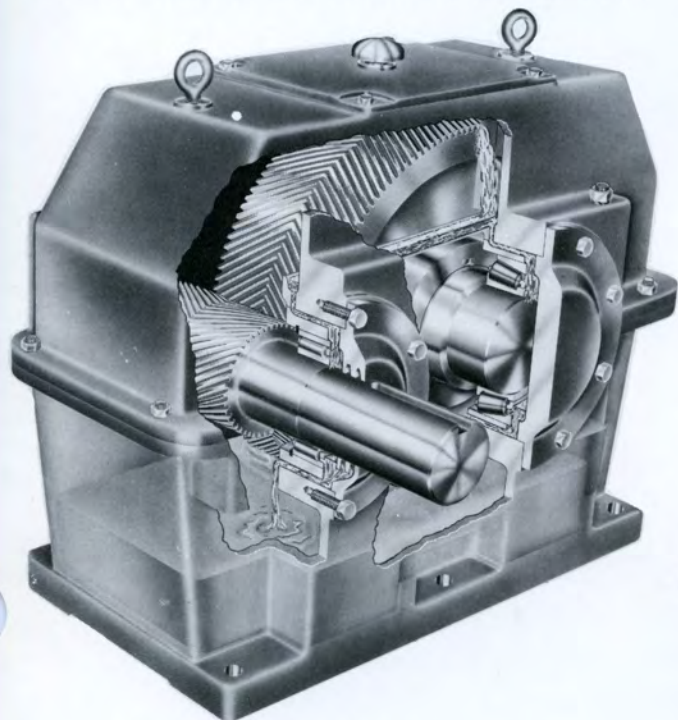


FIGURE 37
Typical Type S Single Reduction Herringbone Gear Reducer. Note simple but positive and fool-proof Lubrication System.

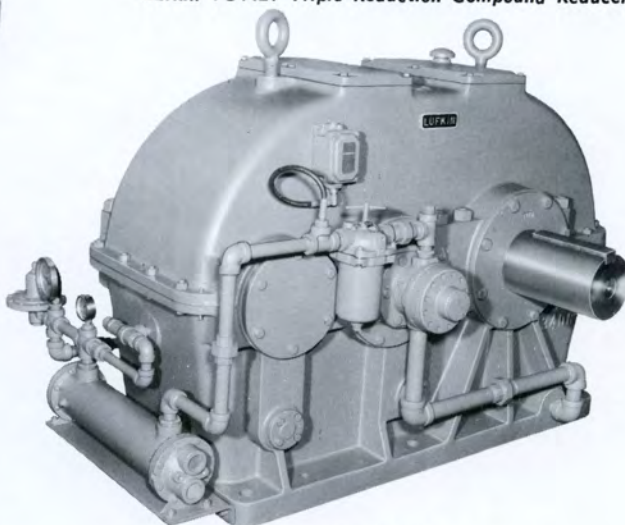


FIGURE 38
Lufkin Type N Two Stage Speed Increaser/Reducer.

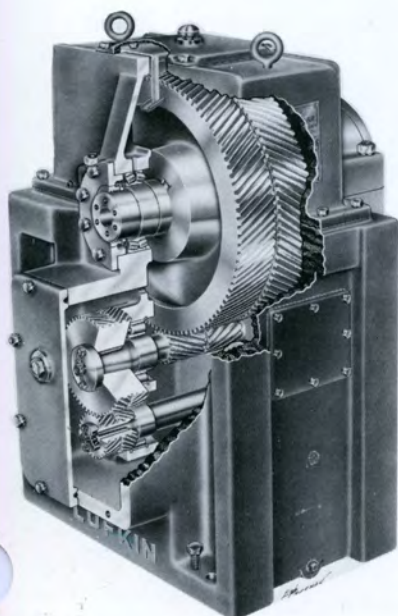


FIGURE 39
Lufkin Change Gear Extruder Drive for the plastic and rubber industries.

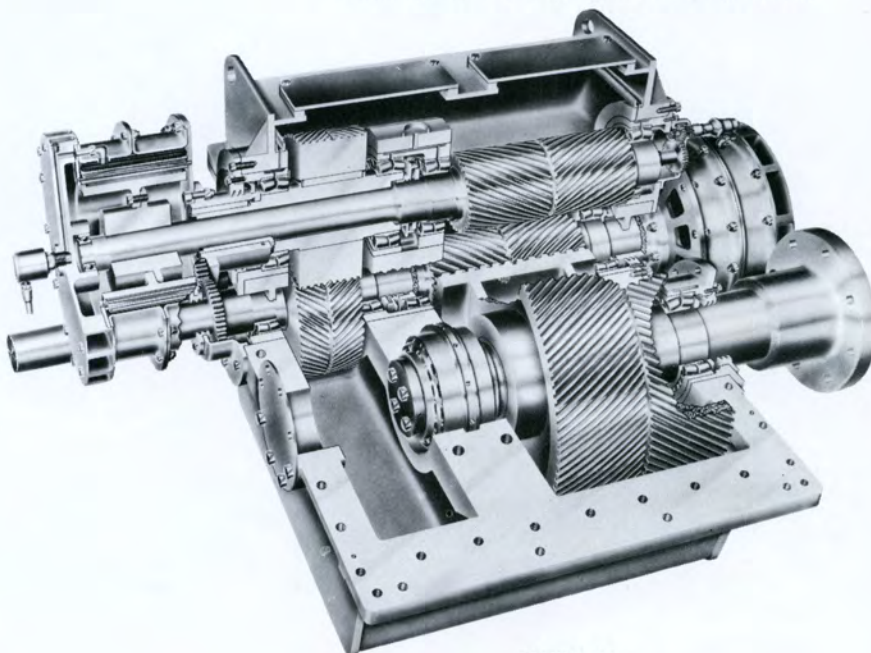


FIGURE 40
Lufkin Horizontal Offset Reverse-Reduction Marine Propulsion Gear with pneumatic clutches.



LUFKIN

INDUSTRIES, INC.
LUFKIN, TEXAS